




DESCRIPTION : PIN HEADER, 2.0mm PITCH, DOUBLE ROW,
STRAIGHT INSULATOR PROFILE 2.0mm

PART No: P9113-XX-02-1
XX- No. OF CONTACTS(02-80)

RoHS



PHYSICAL DATA

INSULATOR BODY : POLYESTER, UL94V-0
CONTACT : Cu ALLOY, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING : 1A
INSULATION RESISTANCE : 5000M Ω MIN
DIELECTRIC WITHSTANDING : 500V AC FOR ONE MINUTE

MECHANICAL DATA

PIN RETENTION FORCE : 0.5KG MIN





ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +105°C



DESCRIPTION : PIN HEADER, 2.0mm PITCH, DOUBLE ROW,
STRAIGHT INSULATOR PROFILE 2.0mm

PART No: P9113-XX-02-1
XX- No. OF CONTACTS(02-80)

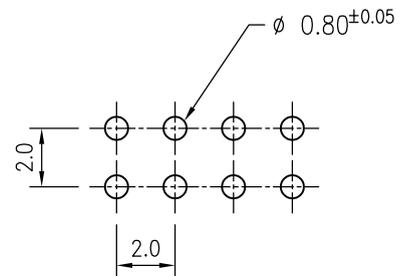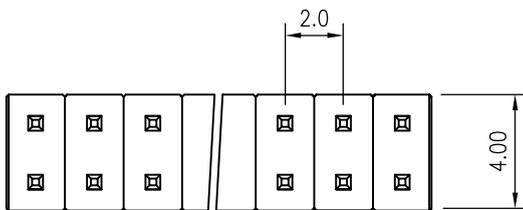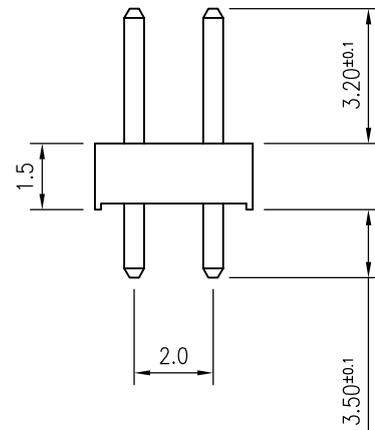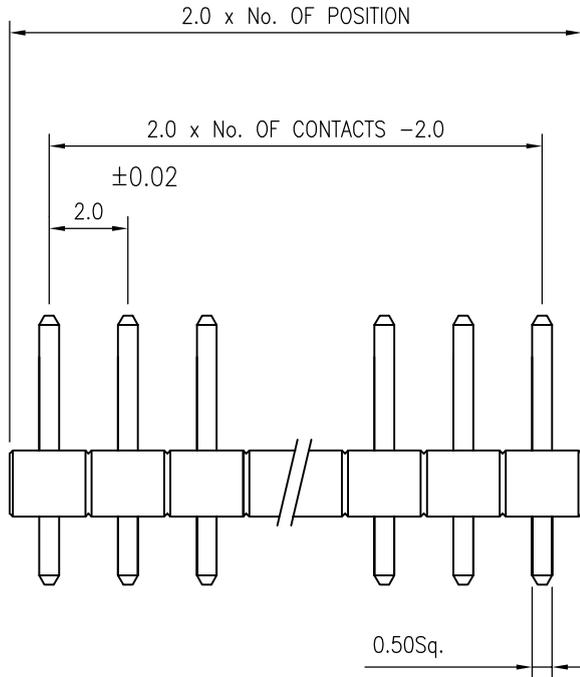

RECOMMENDED P.C.B. LAYOUT

RECOMMENDED P.C.B. LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.50\text{mm}$
 $\pm 2'$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.