




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2.00mm PITCH(0.079") PIN HEADER DOUBLE
ROW RIGHT ANGLE

PART NO: P9114XXX-XX-1

RoHS



PHYSICAL

INSULATION

MATERIAL : POLYESTER

FLAMMABILITY : UL94V-0

COLOR : BLACK

CONTACT

MATERIAL : COPPER ALLOY

SOLDER TAILS : GOLD PLATED

PACKAGING TYPE : STANDARD

ELECTRICAL

CURRENT RATING : 1A

INSULATION RESISTANCE : 5000M OHMS MIN

DIELECTRIC WITHSTANDING : 500V AC

MECHANICAL DATA

PIN RETENTION FORCE : 0.5KG MIN

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +105°C


PROCESS RATING : 180°C FOR 5SEC



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2.00mm PITCH(0.079") PIN HEADER DOUBLE
ROW RIGHT ANGLE

PART NO: P9114XXX-XX-1

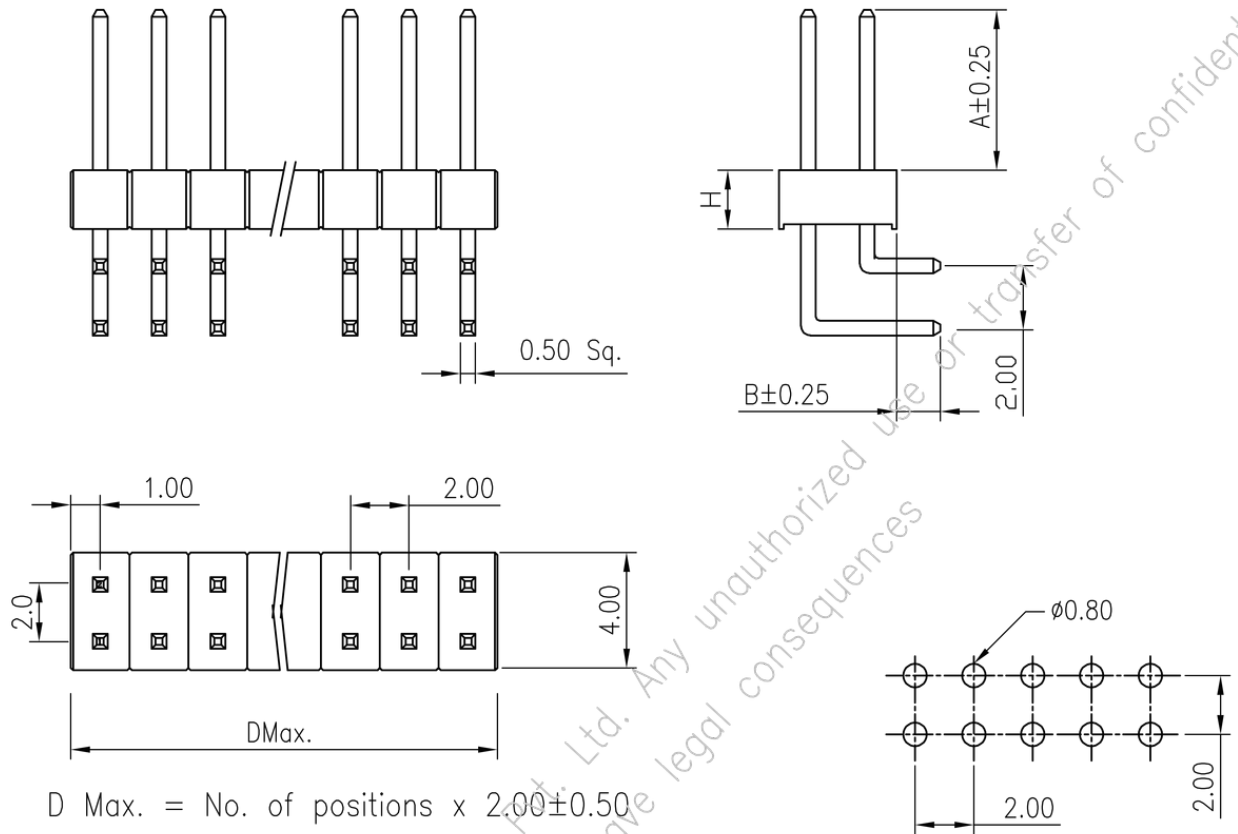

D Max. = No. of positions x 2.00±0.50

ORDERING INFORMATION

P9114XXX-XX-1

X=H=Height	
-	1.50mm
A	2.00mm

NO OF CONTACTS
(04-80)


XX-ABOVE-BELOW LENGTH

XX=Above Below Length		
XX	A	B
01	3.20	2.80
02	3.20	3.50
11	4.00	2.80
15	4.00	2.40
1A	4.00	3.20

Recommended P.C.B. layout
(PCB TOLERANCE ±0.05)

MATES WITH
P9413,
P9414

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.