

DESCRIPTION : PIN HEADER 2.00mm PITCH DUAL ROW, STRAIGHT
DOUBLE DECKER, RoHS

PART NO: P9118-XXG12-1
XX= NO. OF CONTACTS

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: PA9T
FLAMMABILITY	: UL94V-0
COLOR	: BLACK COLOR
CONTACT	: COPPER ALLOY, GOLD PLATED
PACKAGING TYPE	: STANDARD PACKING

ELECTRICAL DATA

CURRENT RATING	: 2A
INSULATION RESISTANCE	: 5000M OHMS MIN
DIELECTRIC WITHSTANDING	: 500V AC/MIN

MECHANICAL DATA





PIN RETENSION FORCE	: 0.5 KG. MIN
---------------------	---------------

ENVIRONMENTAL DATA

TEMPERATURE RANGE	: -40° TO +105° C
SOLDERING TEMPERATURE	: 260°C FOR 5Sec.

DESCRIPTION : PIN HEADER 2.00mm PITCH DUAL ROW, STRAIGHT
DOUBLE DECKER, RoHS

PART NO: P9118-XXG12-1
XX= NO. OF CONTACTS

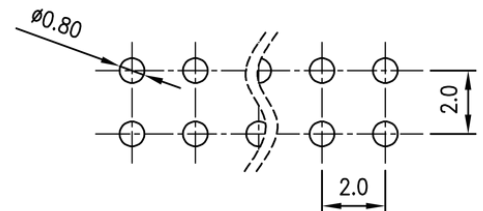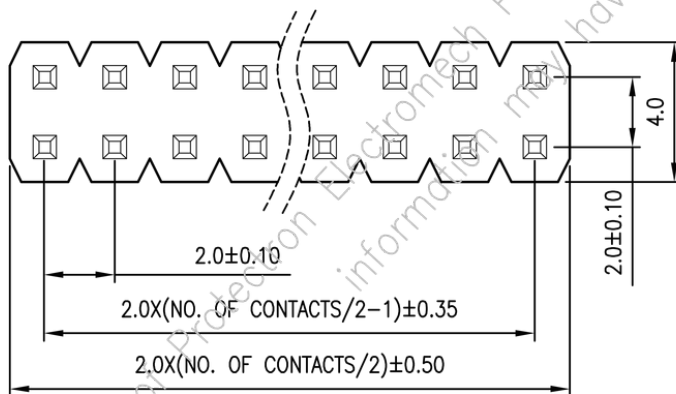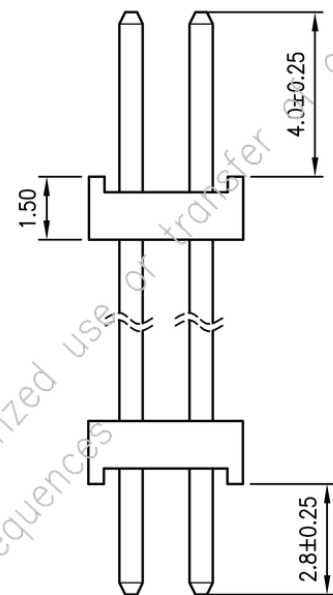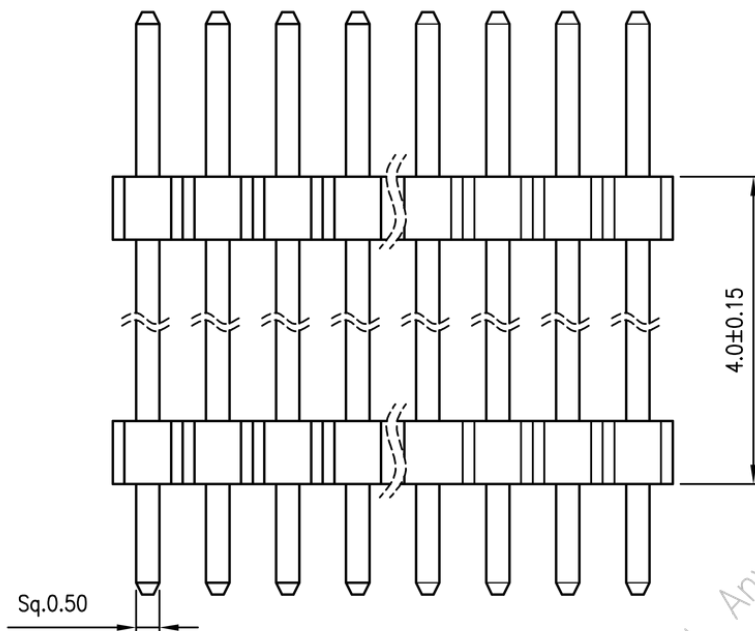

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE ± 0.05

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.