




DESCRIPTION : 1.27x1.27mm PIN HEADER, DUAL ROW,
RIGHT ANGLE

PART NO: P9134XXXXXX-X

RoHS



PHYSICAL DATA

INSULATOR	:	POLYESTER, UL 94V-0
CONTACT	:	COPPER ALLOY
PACKAGING TYPE	:	STANDARD

ELECTRICAL DATA

CURRENT RATING	:	1AMPS
INSULATION RESISTANCE	:	5000M OHMS MIN
WITHSTANDING VOLTAGE	:	500V AC

ENVIRONMENTAL DATA



TEMPERATURE RANGE	:	-40° TO +105° C
-------------------	---	-----------------





PROTECTRON®
ELECTROMECH (P) LTD

DESCRIPTION : 1.27x1.27mm PIN HEADER, DUAL ROW,
RIGHT ANGLE


PART NO: P9134XXXXXX-X

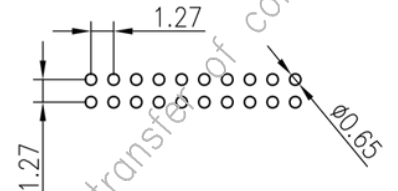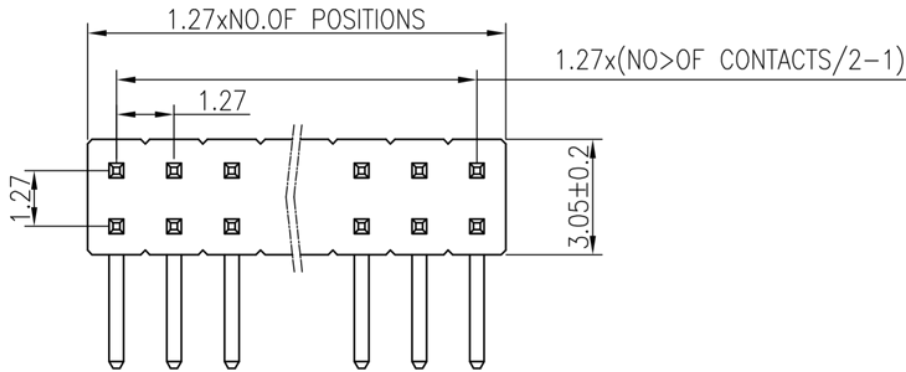

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

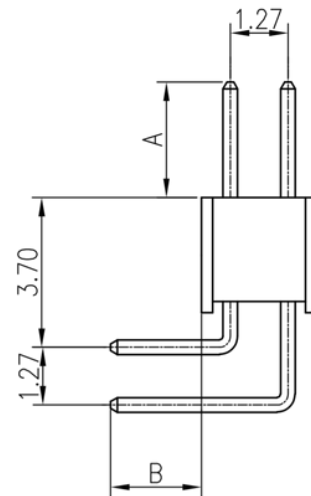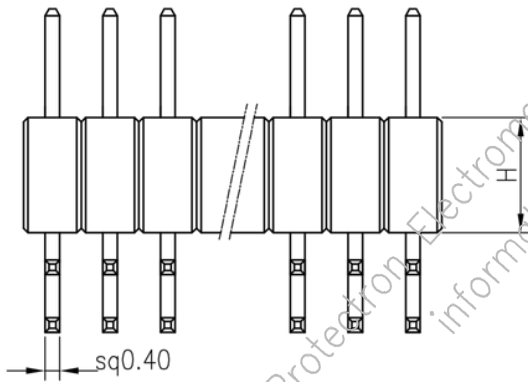

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2'$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 1.27x1.27mm PIN HEADER, DUAL ROW,
RIGHT ANGLE

PART NO: P9134XXXXXX-X

ORDERING INFORMATION

P9134XXXXXX-X

SERIES	X	INSULATOR HEIGHT(H)	XXX	NO. OF CONTACTS	XX	A/B	X	PLATING
P913	4=DOUBLE ROW R/A	"-"=Std 2.54mm A=1.70mm B=3.0mm C=3.40mm D=3.95mm E=2.90mm F=2.0mm G=1.0mm H=1.15mm		006 TO 100		15=4.00/2.30 24=2.80/2.60 26=2.80/2.00 35=3.00/2.30 54=6.0/2.60 57=6.0/3.0		1=GOLD FLASH 2=0.75μ GOLD 3=GOLD FLASH ON CONTACT SIDE TIN ON SOLDER SIDE 4=5μ TIN

MATES WITH
P9433, P9435

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2'$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in