




DESCRIPTION : 1.27mm PITCH PIN HEADER, SMD TYPE,
DUAL ROW, RoHS

PART NO: P9135-XXX3A-1
XXX=NO. OF CONTACTS

RoHS



PHYSICAL DATA

INSULATION

MATERIAL : PA9T
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : COPPER ALLOY
FINISH : GOLD PLATED
PACKAGING TYPE : STANDARD

ELECTRICAL DATA

CURRENT RATING : 1A
INSULATION RESISTANCE : 5000M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC

ENVIRONMENTAL DATA

OPERATING TEMPERATURE : -40°C TO +105°C
SOLDERING TEMPERATURE : 260°C FOR 5SECS

MECHANICAL DATA





RETENTION FORCE : 2.73Kg MIN.



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 1.27mm PITCH PIN HEADER, SMD TYPE,
DUAL ROW, RoHS

PART NO: P9135-XXX3A-1
XXX=NO. OF CONTACTS

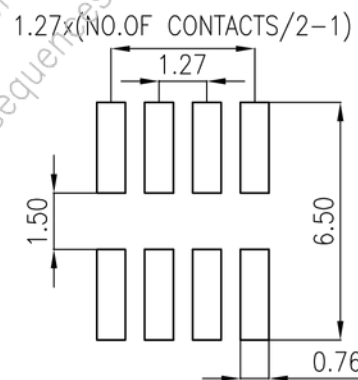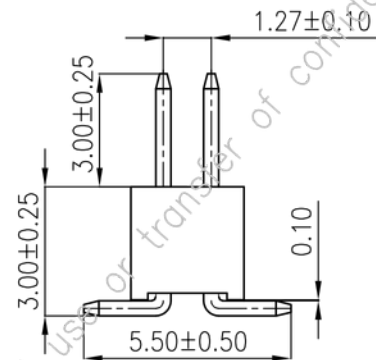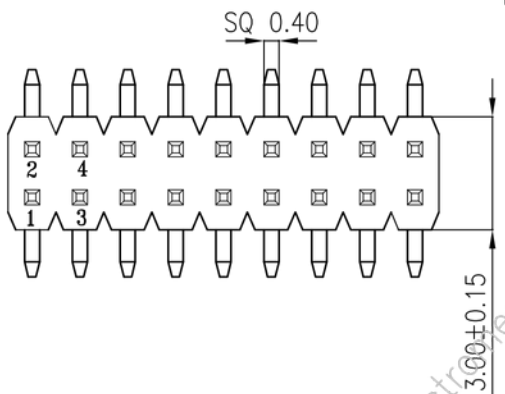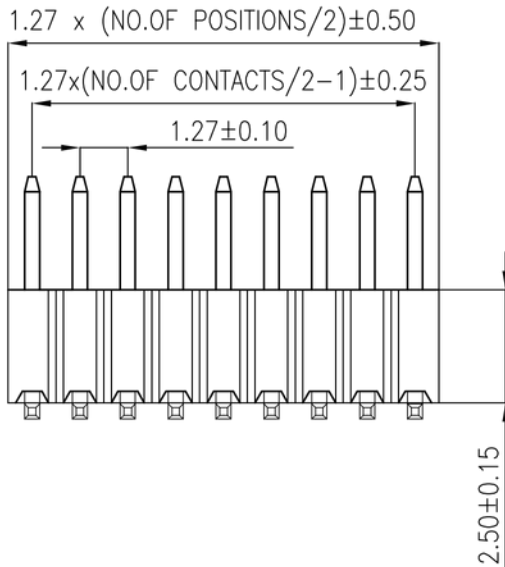

RECOMMENDED P.C.BOARD LAYOUT
(PCB TOLERANCE ±0.05)

MATES WITH
P9433, P9435

ORDERING INFORMATION

P9135-XXX3A-1

NO OF CONTACTS(004-100)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.