




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 1.27x1.27mm PIN HEADER, DUAL ROW,
RIGHT ANGLE

PART NO: P913XXXXXXX-X

RoHS



PHYSICAL DATA

INSULATOR	:	POLYESTER, UL 94V-0
CONTACT	:	COPPER ALLOY, GOLD PLATED
PACKAGING TYPE	:	STANDARD

ELECTRICAL DATA

CURRENT RATING	:	1AMPS
INSULATION RESISTANCE	:	5000M OHMS MIN
WITHSTANDING VOLTAGE	:	500V AC

ENVIRONMENTAL DATA





TEMPERATURE RANGE	:	-40° TO +105° C
-------------------	---	-----------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 1.27x1.27mm PIN HEADER, DUAL ROW,
RIGHT ANGLE

PART NO: P913XXXXXXX-X

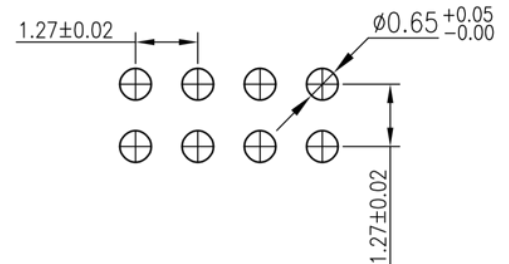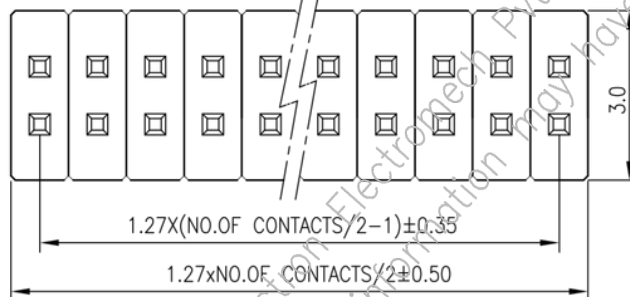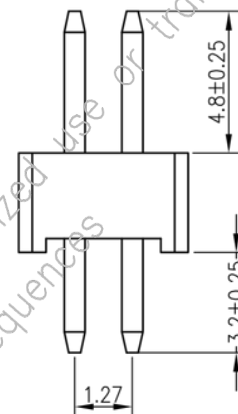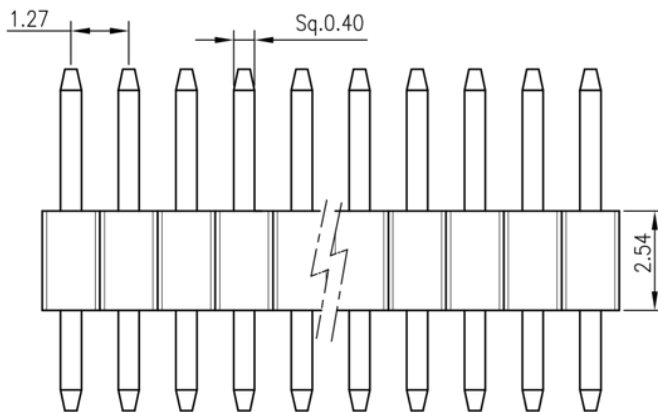

RECOMMENDED P. C. BOARD LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in



DESCRIPTION : 1.27x1.27mm PIN HEADER, DUAL ROW,
RIGHT ANGLE

PART NO: P913XXXXXXX-X


ORDERING INFORMATION

P913XXXXXXX-X

SERIES	TYPE OF ROW	PROFILE	NO. OF CONTACTS	A/B	PLATING
P913	1=SINGLE ROW S/T 3=DOUBLE ROW S/T	"-"=Std 2.54mm A=1.70mm B=3.0mm C=3.40mm D=3.95mm E=2.90mm F=2.0mm G=1.0mm H=1.15mm	001 TO 40 FOR SINGLE ROW 006 TO 100 FOR DOUBLE ROW	15=4.00/2.30 24=2.80/2.60 26=2.80/2.00 35=3.00/2.30 54=6.0/2.60 57=6.0/3.0	1=GOLD FLASH 2=0.75 μ GOLD 3=GOLD FLASH ON CONTACT SIDE TIN ON SOLDER SIDE 4=5 μ TIN

MATES WITH
P9433, P9435

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2'$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.