




DESCRIPTION : 0.8mm PITCH PIN HEADER, SMD DOCKING TYPE,
WITH ALIGNMENT

PART NO: P9155-XXX83-1
XXX= NO.OF CONTACTS

RoHS



PHYSICAL DATA

INSULATOR BODY	:	NYLON 6T OR LCP (UL94V-0)
CONTACT PIN	:	PHOSPHOR BRONZE, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING	:	0.5 A
INSULATION RESISTANCE	:	1000 M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC FOR ONE MINUTE
CONTACT RESISTANCE	:	40m OHMS MAX





ENVIRONMENTAL DATA

OPERATING TEMPERATURE	:	-20°C TO +105°C
-----------------------	---	-----------------




DESCRIPTION : 0.8mm PITCH PIN HEADER, SMD DOCKING TYPE,
WITH ALIGNMENT

PART NO: P9155-XXX83-1
XXX= NO.OF CONTACTS

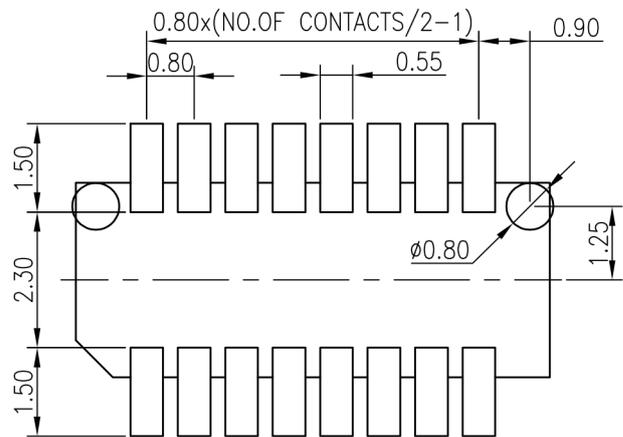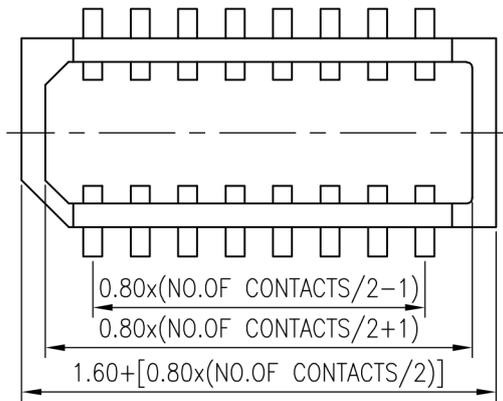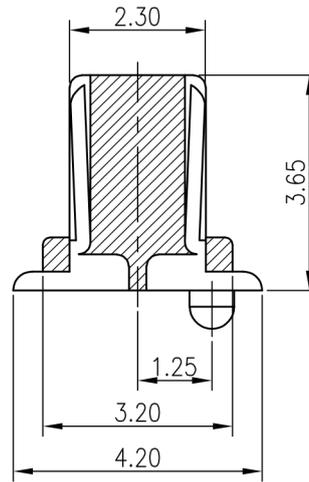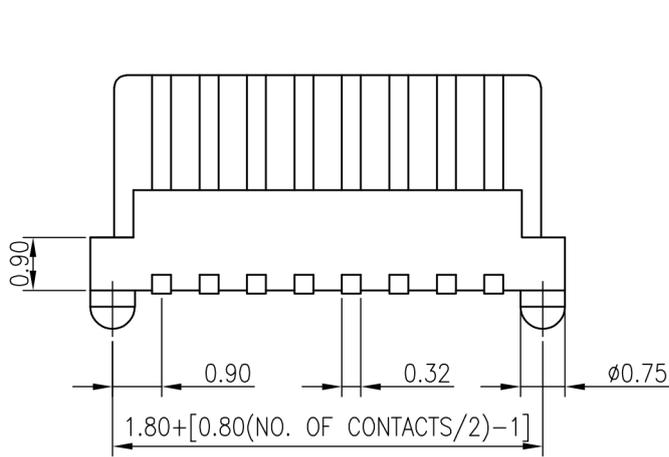

RECOMMENDED P.C.BOARD LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.