




DESCRIPTION : PIN HEADER, 0.8mm PITCH, DOUBLE ROW SURFACE MOUNT

PART NO: P9157-XXX2F-1

RoHS



PHYSICAL DATA

INSULATION

MATERIAL

: BLACK POLYESTER UL94V-0

CONTACT

: BRASS, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING

: 0.75 A / CONTACT Max.

INSULATION RESISTANCE

: 1000M OHMS AT V=100V

DIELECTRIC WITHSTANDING

: 300V AC FOR 1 MINUTE

CONTACT RESISTANCE

: 20m OHMS / CONTACT

MECHANICAL DATA

OPERATING TEMP. RANGE

: GOLD PLATED =-55°C TO +105°C

SOLDERING TEMP. RANGE





: +260°C, 10s max.



PROTECTRON[®]
ELECTROMECH (P) LTD


DESCRIPTION : PIN HEADER, 0.8mm PITCH, DOUBLE ROW SURFACE MOUNT

PART NO: P9157-XXX2F-1

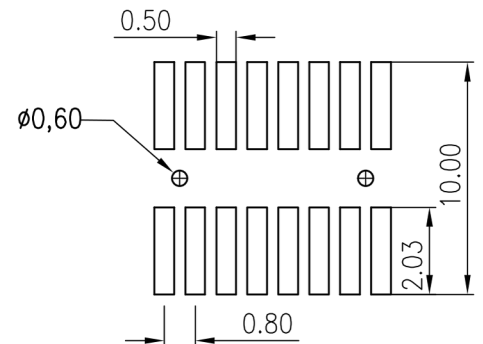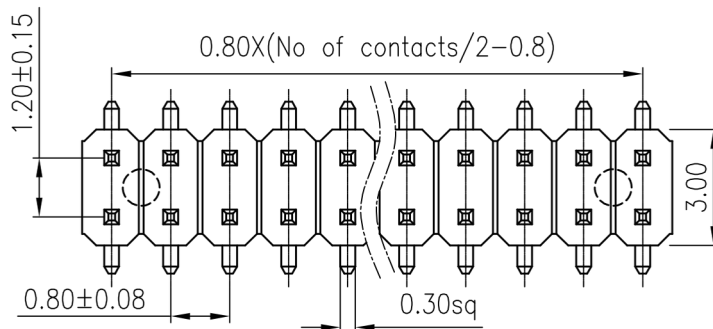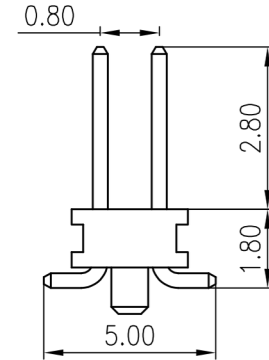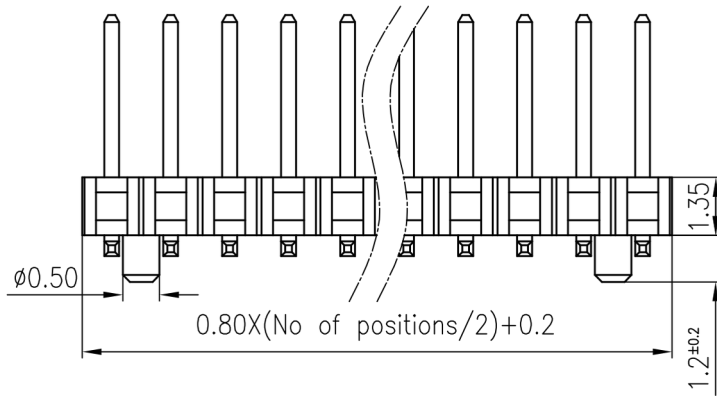

RECOMMENDED P.C.B. LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.