




DESCRIPTION : PIN HEADER, 0.8mm PITCH, DOUBLE ROW SURFACE MOUNT	PART NO: P9157-XXX2F-1
---	------------------------

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: BLACK POLYESTER UL94V-0
CONTACT	: BRASS, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING	: 0.75 A / CONTACT Max.
INSULATION RESISTANCE	: 1000M OHMS AT V=100V
DIELECTRIC WITHSTANDING	: 300V AC FOR 1 MINUTE
CONTACT RESISTANCE	: 20m OHMS / CONTACT

MECHANICAL DATA





OPERATING TEMP. RANGE	: GOLD PLATED =-55°C TO +105°C
SOLDERING TEMP. RANGE	: +260°C, 10s max.



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER, 0.8mm PITCH, DOUBLE ROW SURFACE MOUNT

PART NO: P9157-XXX2F-1

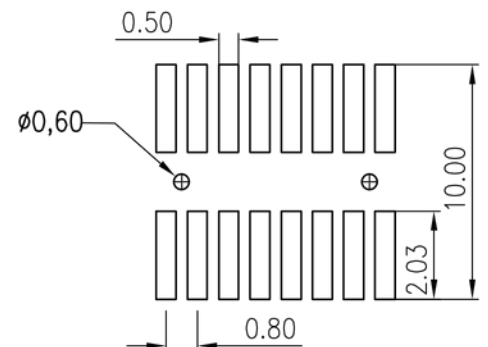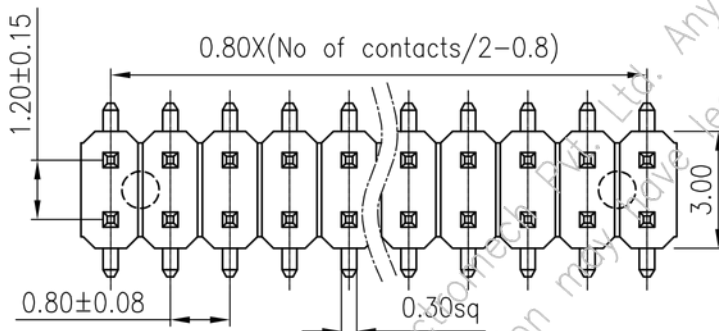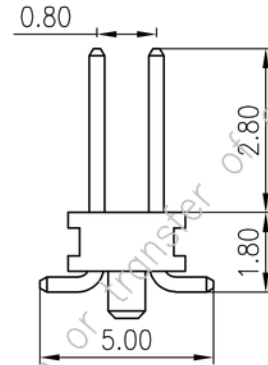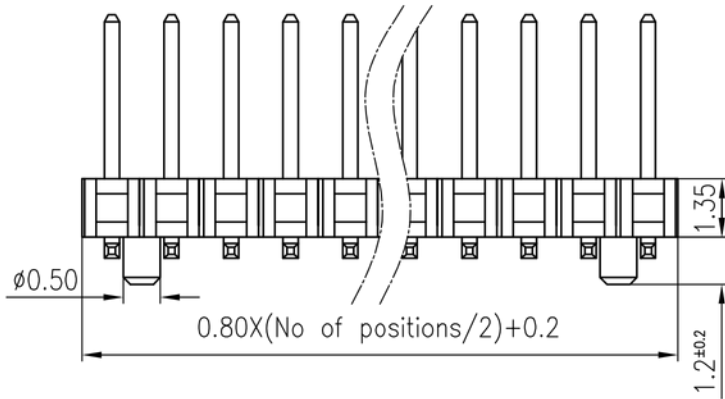

RECOMMENDED P.C.B. LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in