


DESCRIPTION : PIN HEADER 2.2x3.0mm DUAL ROW SMT

PART NO: P9175-XX-C1-4R

RoHS



PHYSICAL DATA

MATERIAL DATA:

INSULATOR BODY	: PBT
FLAMMABILITY	: UL94V-0
COLOR	: BLACK
CONTACT	: BRASS, TIN PLATED
PACKAGING TYPE	: TAPE AND REEL PACKING

ELECTRICAL DATA:

CURRENT RATING	: 3 AMPS
CONTACT RESISTANCE	: 20M OHMS MAX
INSULATION RESISTANCE	: 1000M OHMS MIN
DIELECTRIC WITHSTANDING	: 500V AC

ENVIRONMENTAL DATA:





OPERATING TEMP. RANGE	: -65°C TO +125°C
-----------------------	-------------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER 2.2x3.0mm DUAL ROW SMT

PART NO: P9175-XX-C1-4R

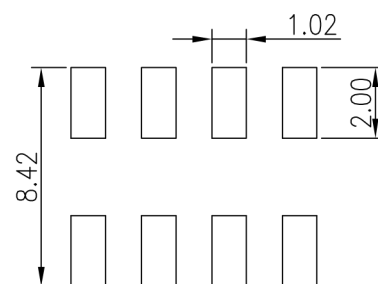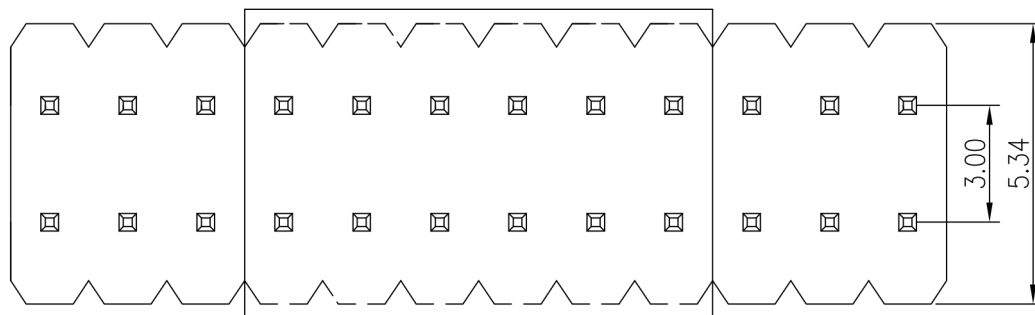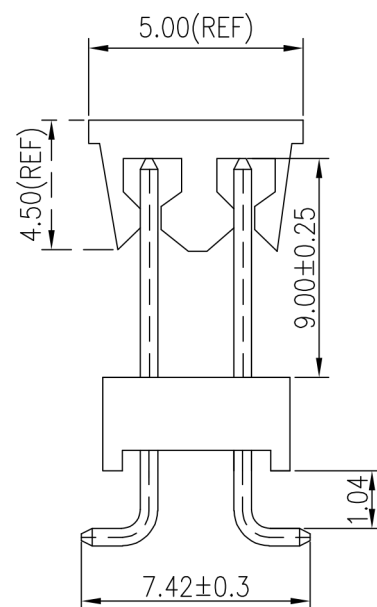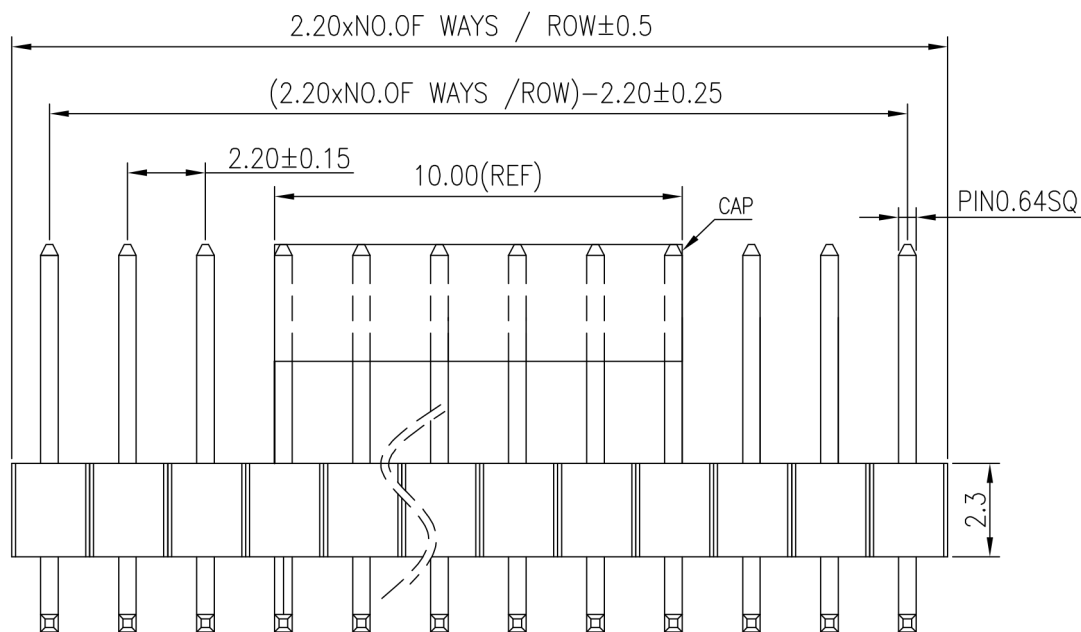

ORDERING INFORMATION

P9175-XX-C1-4R

NO OF CONTACTS
(04-80)

P9175-XX-C1-4R - TAPE & REEL + CAP PACKING

RECOMMENDED P.C.B LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in