




DESCRIPTION : PIN HEADER 2.2x3.0mm DUAL ROW SMT

PART NO: P9175-XX-C1-4R

RoHS



PHYSICAL DATA

MATERIAL DATA:

INSULATOR BODY	:	PBT
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK
CONTACT	:	BRASS, TIN PLATED
PACKAGING TYPE	:	TAPE AND REEL PACKING

ELECTRICAL DATA:

CURRENT RATING	:	3 AMPS
CONTACT RESISTANCE	:	20M OHMS MAX
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC

ENVIRONMENTAL DATA:



OPERATING TEMP. RANGE	:	-65°C TO +125°C
-----------------------	---	-----------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER 2.2x3.0mm DUAL ROW SMT

PART NO: P9175-XX-C1-4R

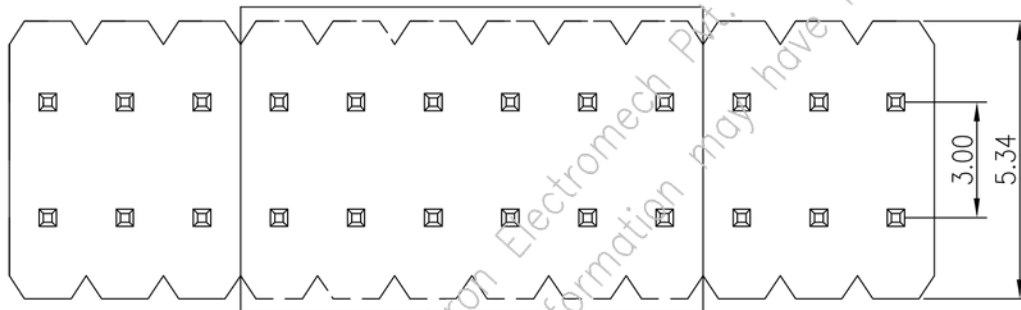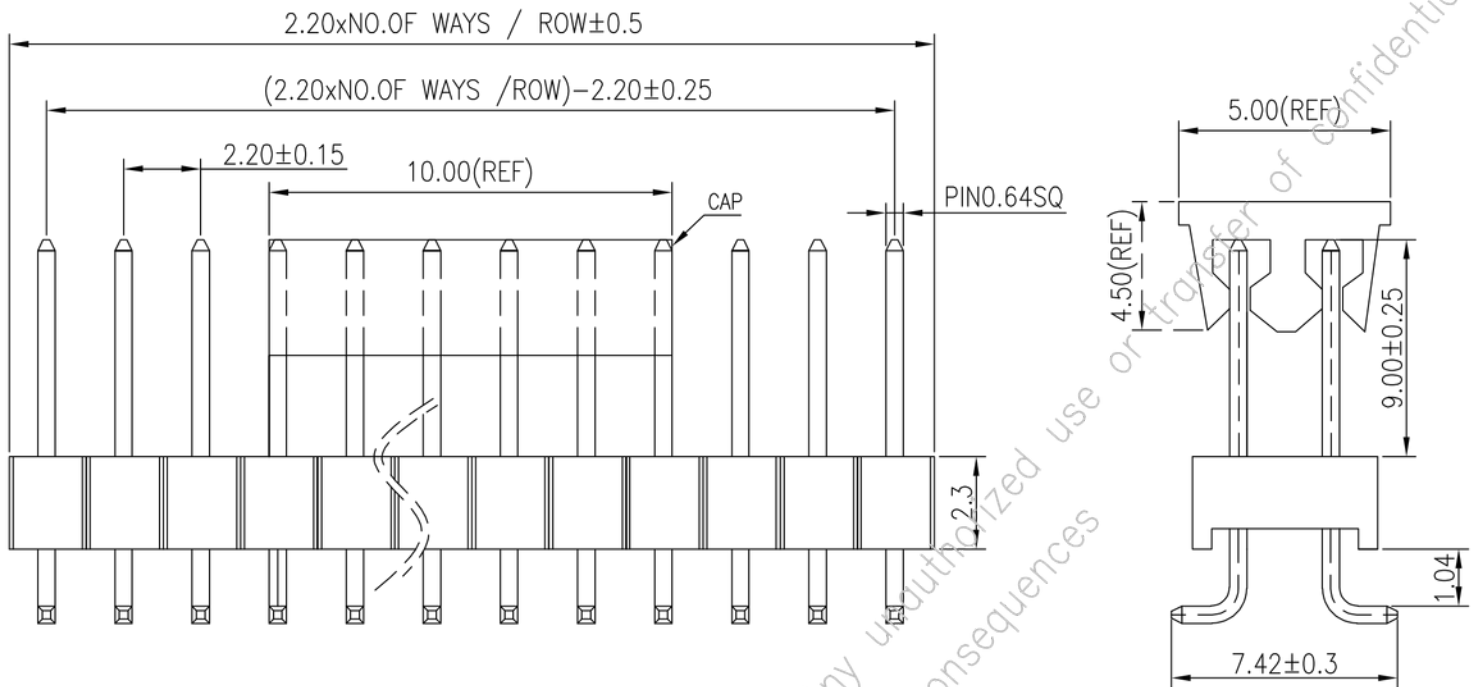


ORDERING INFORMATION

P9175-XX-C1-4R

NO OF CONTACTS
(04-80)

P9175-XX-C1-4R - TAPE & REEL + CAP PACKING

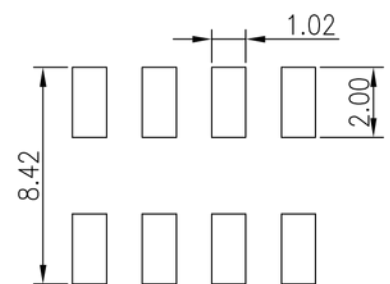

RECOMMENDED P.C.B LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in