




DESCRIPTION : FEMALE HEADER 2.54mm PITCH, PROFILE 7mm
DOUBLE ROW

PART NO: P9303-XX-XX

RoHS



PHYSICAL DATA

MATERIAL	:	
INSULATOR BODY	:	GLASS FILLED POLYESTER
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK
SLEEVE	:	BRASS, TIN PLATED OVER NICKEL
CLIP	:	BERYLLIUM COPPER, GOLD PLATED

ELECTRICAL DATA

VOLTAGE RATING	:	100V AC/ 150V DC
CURRENT RATING	:	3A
CONTACT RESISTANCE	:	10m OHMS Max
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	1000V AC/MIN

MECHANICAL DATA


TYPICAL INSERTION FORCE	:	0.12 Kg. max. with Ø0.76mm pin or 0.635mm Sq pin
TYPICAL WITHDRAWAL FORCE	:	0.06 Kg. min. with Ø0.76mm pin or 0.635mm Sq pin
MECHANICAL LIFE	:	500 CYCLES min. with Ø0.76mm pin or 0.635mm Sq pin

ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-55C° TO +105° C
-------------------	---	------------------

DESCRIPTION : FEMALE HEADER 2.54mm PITCH, PROFILE 7mm
DOUBLE ROW

PART NO: P9303-XX-XX

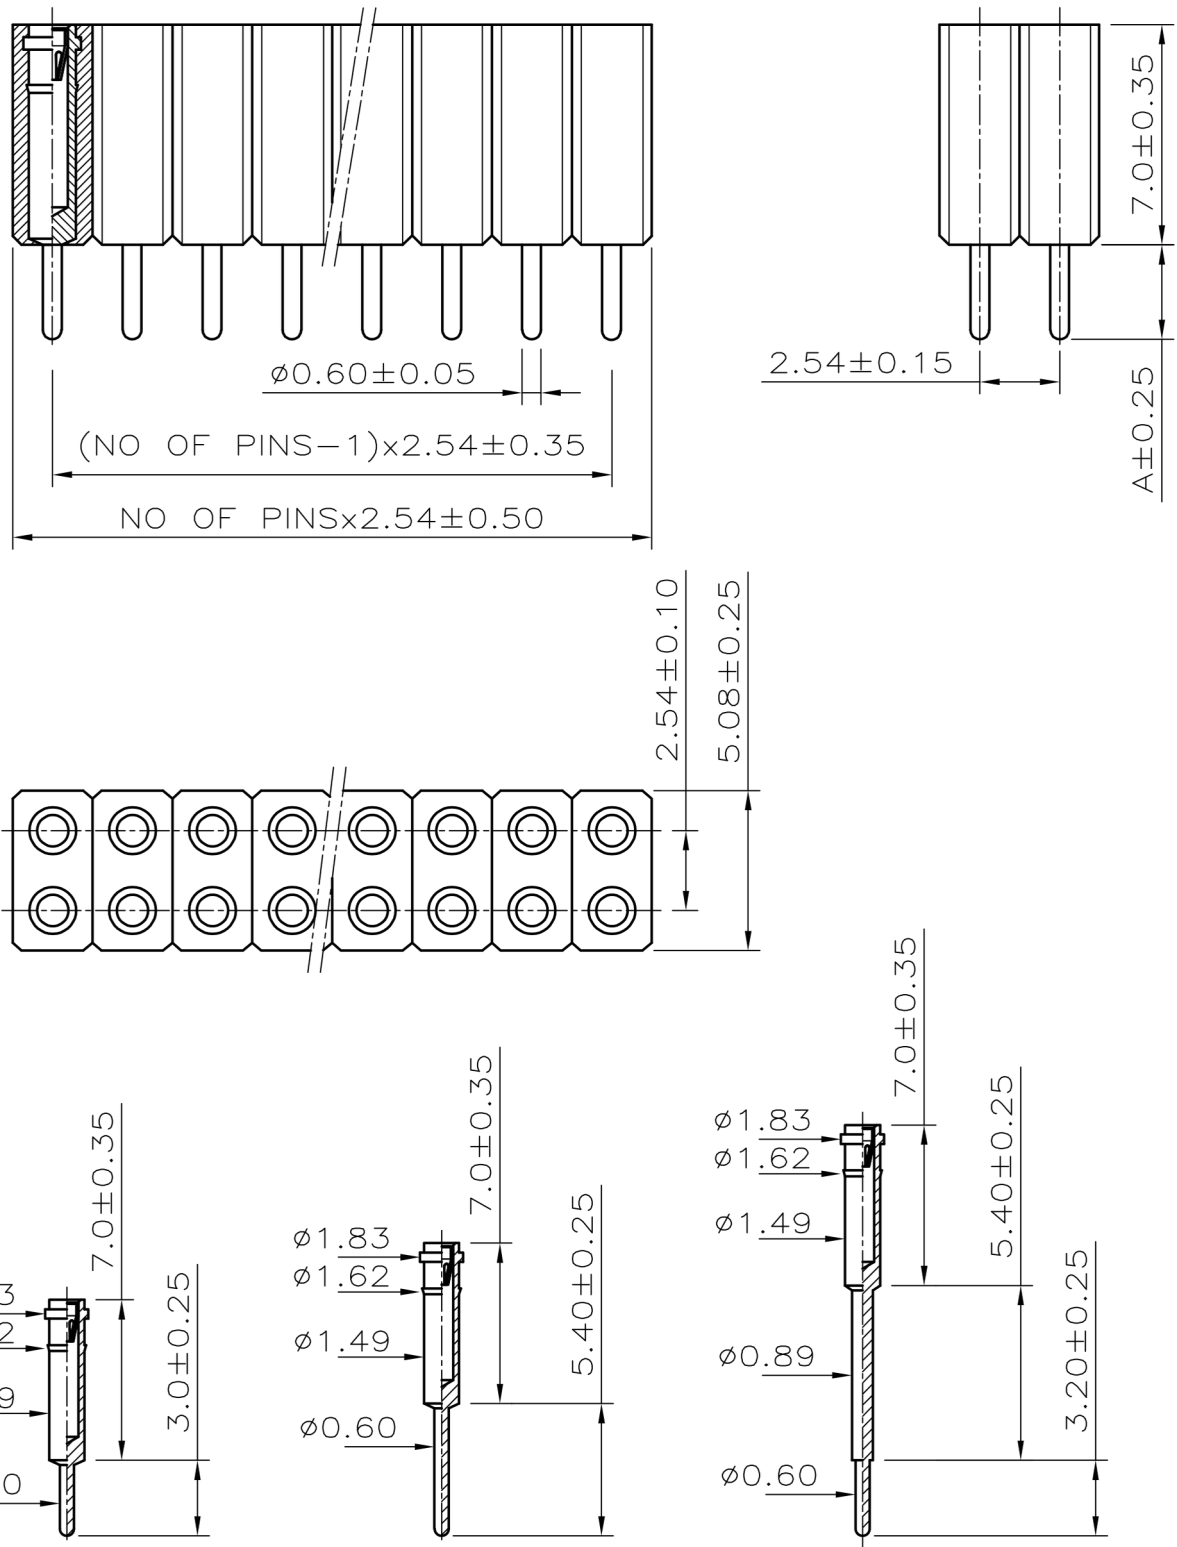

PIN DETAILS



DESCRIPTION : FEMALE HEADER 2.54mm PITCH, PROFILE 7mm
DOUBLE ROW

PART NO: P9303-XX-XX

ORDERING INFORMATION

P9303-XX-XX

XX-2 TO 72 PINS
No. OF PINS

A	X
PC PIN 3.0mm	1
PC PIN 5.4mm	2
PC PIN 10.4mm	3

INNER CLIP	OUTER SLEEVE	X
0.25μ Au	5μ Sn	1
0.75μ Au	5μ Sn	2
5μ Sn	5μ Sn	3
0.75μ Au	0.25μ Au	4

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2'$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.