


DESCRIPTION : PCB CONNECTOR 2.54mm PITCH ,DOUBLE ROW,
SOLDER TAIL ACCEPTS ROUND PINS
Ø0.70-Ø0.8mm

PART NO: P9306-XX-41-1
XX=NO OF CONTACTS(2-80)

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: GLASS FILLED POLYESTER
FLAMMABILITY	: UL94V-0 / PPS
COLOR	: BLACK
SLEEVE	: BRASS, TIN PLATED
CLIP	: BERYLLIUM COPPER, GOLD PLATED
PACKAGING TYPE	: STANDARD

ELECTRICAL DATA

CURRENT RATING	: 3A
INSULATION RESISTANCE	: 10000M OHMS MIN
DIELECTRIC WITHSTANDING	: 1000V rms MIN
CONTACT RESISTANCE	: 10m OHMS MAX.
VOLTAGE RATING	: 100V AC / 150V DC

MECHANICAL DATA

TYPICAL INSERTION FORCE	: 0.12 Kg. max. with Ø0.76mm pin or 0.635mm Sq pin
TYPICAL WITHDRAWAL FORCE	: 0.06 Kg. min. with Ø0.76mm pin or 0.635mm Sq pin
MECHANICAL LIFE	: 500 CYCLES Min. with Ø0.76mm pin or 0.635mm Sq pin

ENVIRONMENTAL DATA


TEMPERATURE RANGE	: -65°C TO +125°C
PROCESS RATING	: 260°C FOR 10SEC



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PCB CONNECTOR 2.54mm PITCH ,DOUBLE ROW,
SOLDER TAIL ACCEPTS ROUND PINS
Ø0.70-00.8mm

PART NO: P9306-XX-41-1
XX=NO OF CONTACTS(2-80)

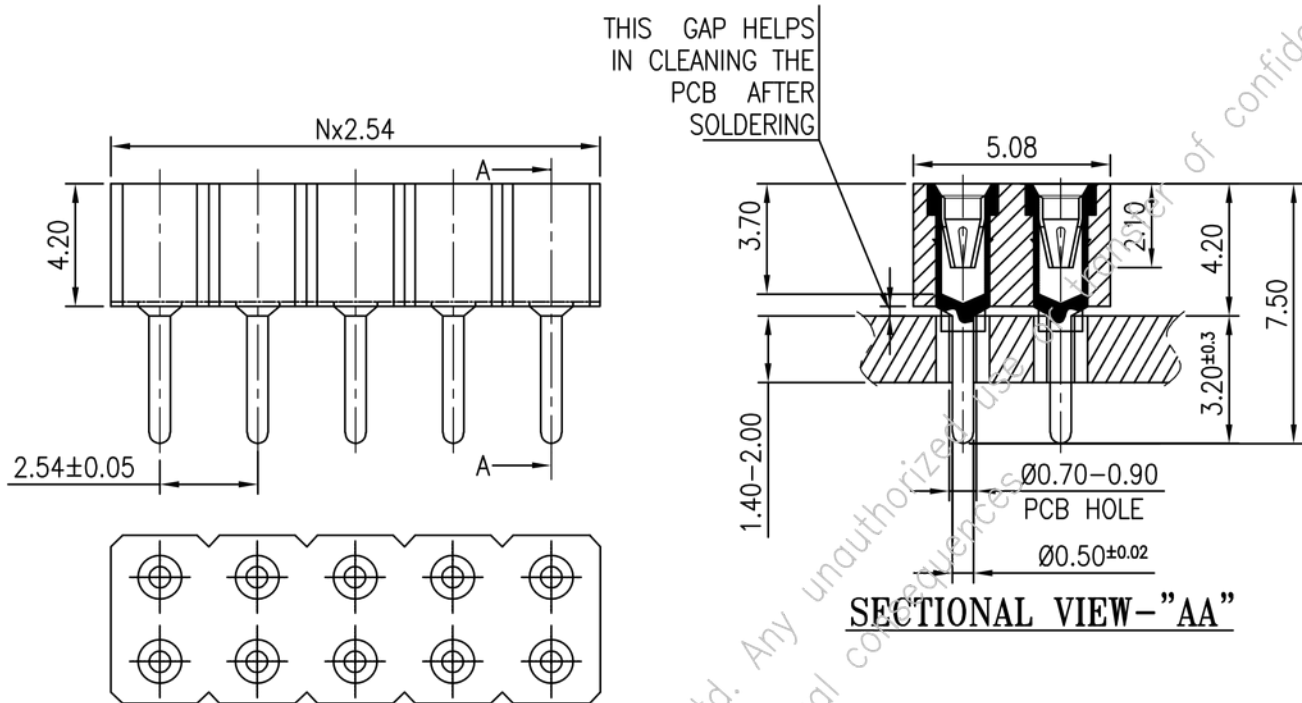

MATES WITH

P9103,P9104
P9105,P9108

ORDERING INFORMATION

P9306-XX-41-1

NO OF CONTACTS
(2-80)

Projection:



Scale: **NTS**

Sht. Size: **A4**

Gen. Tol.: ±0.35mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.