


DESCRIPTION : FEMALE HEADER 2.54mm PITCH, SINGLE ROW,
STRAIGHT, INSULATOR HEIGHT=8.50mm

PART NO: P9401-XX-2X

RoHS



PHYSICAL DATA

INSULATION	:	
MATERIAL	:	GLASS FILLED THERMOPLASTIC POLYESTER
FLAMMABILITY	:	UL94V-0
CONTACT	:	
MATERIAL	:	COPPER ALLOY
FINISH	:	GOLD PLATED

ELECTRICAL DATA

CURRENT RATING	:	3A
CONTACT RESISTANCE	:	20m OHMS MAX
INSULATION RESISTANCE	:	1000 M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC FOR 1 MINUTE

MECHANICAL DATA

INSERTION FORCE	:	300g max.
EXTRACTION FORCE	:	40g min.
MECHANICAL LIFE	:	100 CYCLES MIN

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40°C TO +105°C
-------------------	---	-----------------



PROTECTRON
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.54mm PITCH, SINGLE ROW,
STRAIGHT, INSULATOR HEIGHT=8.50mm

PART NO: P9401-XX-2X

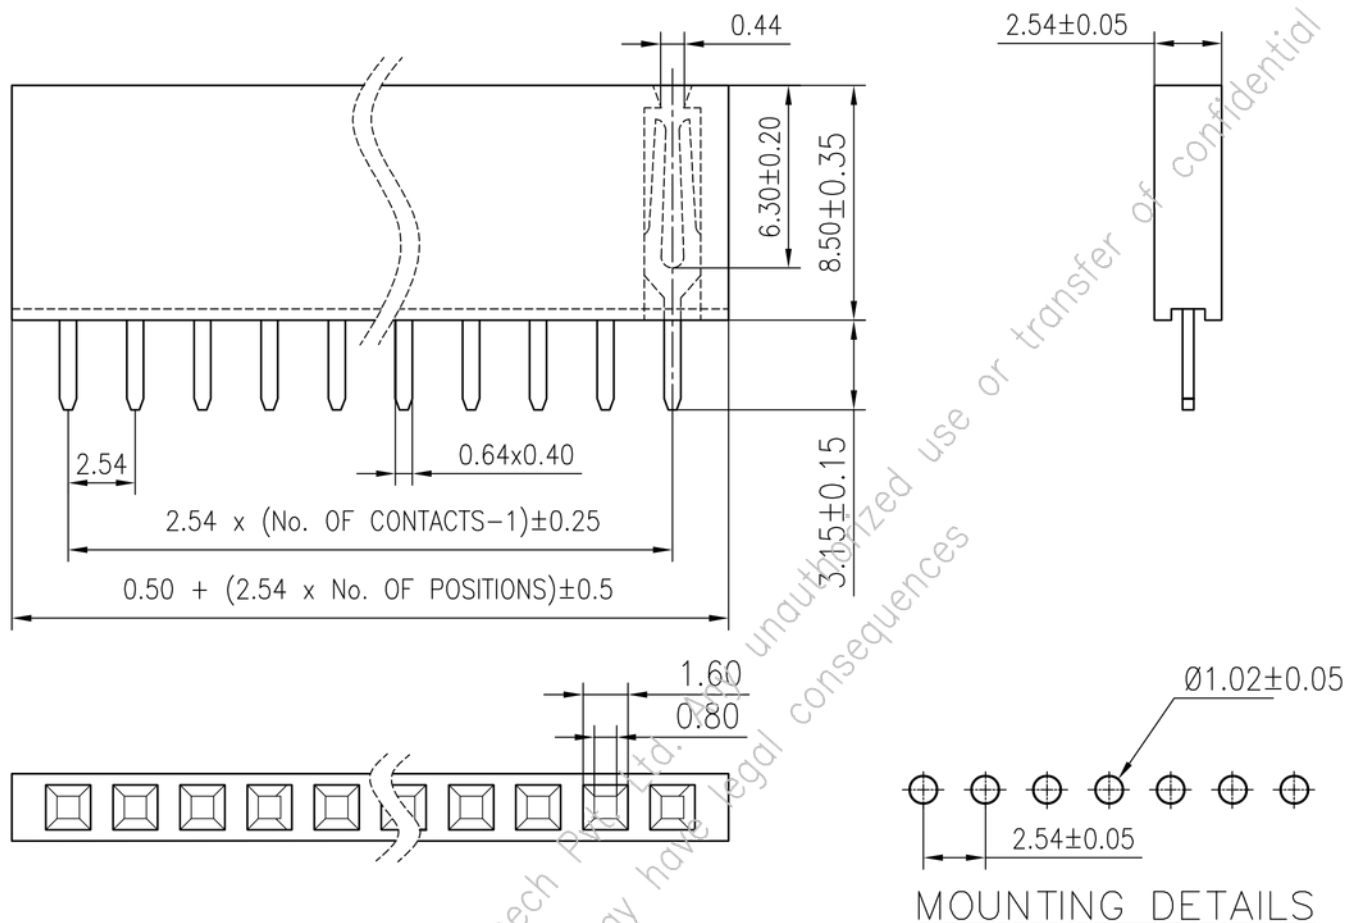

MATES WITH

P9101, P9102
P9107, P9109

ORDERING INFORMATION

P9401-XX-2X

XX=NO. OF CONTACTS

TYPE OF PLATING

GOLD	1
5 μ Sn	2
SELECTIVE	3
0.5 μ GOLD	7

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.35 mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in