




DESCRIPTION : FEMALE HEADER 2.54mm PITCH, SINGLE ROW,
STRAIGHT, 3.55mm PROFILE, RoHS

PART NO: P94011XX121

XX = NO.OF CONTACTS(02-40)

RoHS



PHYSICAL

INSULATION : PA6T, UL94V-0
CONTACT : PHOSPHOR BRONZE, GOLD PLATED

ELECTRICAL

CURRENT RATING : 3A AC/DC
INSULATION RESISTANCE : 1000M Ω MIN.
WITHSTANDING VOLTAGE : 500V AC/DC
CONTACT RESISTANCE : 20m Ω MAX.

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +105°C






PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.54mm PITCH, SINGLE ROW,
STRAIGHT, 3.55mm PROFILE, RoHS

PART NO: P9401IXX121

XX = NO.OF CONTACTS(02-40)

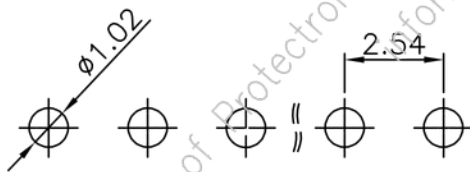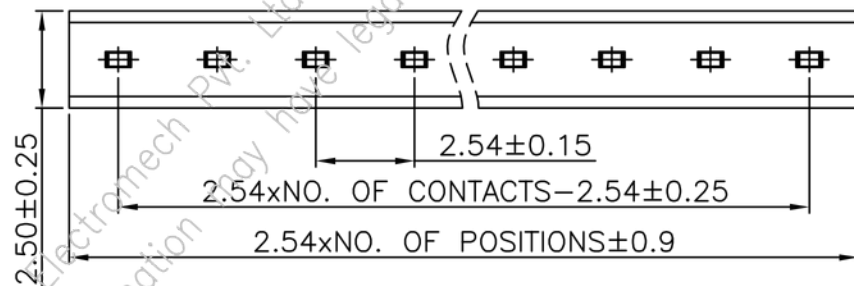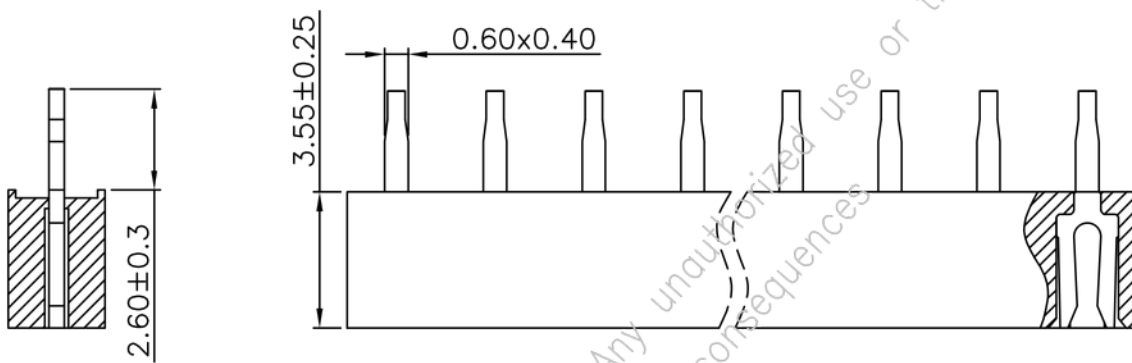

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.35 mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in