




DESCRIPTION : 2.54mm PITCH FEMALE HEADER, DUAL ROW
RIGHT ANGLE, LOW PROFILE= 8.5mm

PART NO:P9404-XX-XX

RoHS



PHYSICAL DATA

MATERIAL DATA:

INSULATOR BODY	:	GLASS FILLED POLYESTER
TERMINAL	:	COPPER ALLOY, GOLD PLATED

ELECTRICAL DATA

RATED CURRENT	:	3A
CONTACT RESISTANCE	:	20m OHMS MAX
INSULATION RESISTANCE	:	5000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC

MECHANICAL DATA

INSERTION FORCE	:	200g MAX
WITHDRAWAL FORCE	:	20g MIN
MECHANICAL LIFE	:	100 CYCLES MIN

ENVIRONMENTAL DATA





TEMPERATURE RANGE	:	-40°C TO +105°C
-------------------	---	-----------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH FEMALE HEADER, DUAL ROW
RIGHT ANGLE, LOW PROFILE= 8.5mm

PART NO:P9404-XX-XX

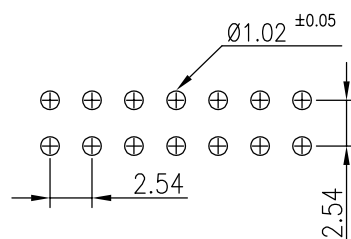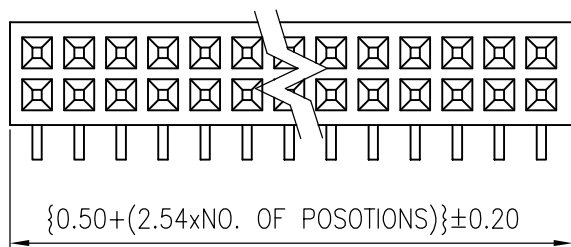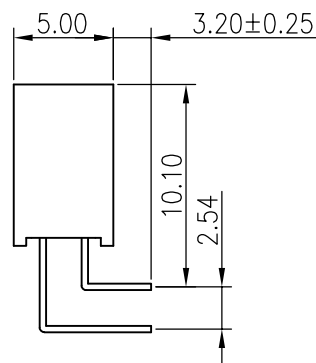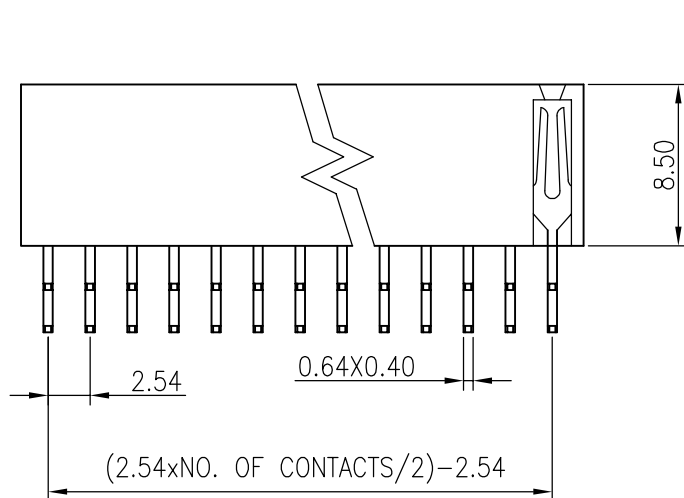

RECOMMENDED P.C.B. LAYOUT

ORDERING INFORMATION

P9404-XX-XX

XX= NO. OF CONTACTS

XX	PLATING
21	GOLD FLASH
22	0.75µ GOLD
23	GOLD FLASH ON CONTACT SIDE & TIN ON SOLDER SIDE
24	5µ TIN

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in