


DESCRIPTION : FEMALE HEADER 2.54mm PITCH, DUAL ROW
RIGHT ANGLE, PROFILE: 5.7mm

PART NO: P9404AXX-XX
1st XX=NO. OF CONTACTS(4-80)
2nd XX=TYPE OF PLATING

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: GLASS FILLED POLYESTER
FLAMMABILITY	: UL94V-0
COLOR	: BLACK
CONTACT	
MATERIAL	: COPPER ALLOY
FINISH	: REFER TABLE
PACKAGING TYPE	: STANDARD

ELECTRICAL DATA

CURRENT RATING	: 3A
INSULATION RESISTANCE	: 1000M OHMS MIN
DIELECTRIC WITHSTANDING	: 500V AC/MIN
CONTACT RESISTANCE	: 20m OHMS MAX

MECHANICAL DATA

INSERTION FORCE	: 200g max.
EXTRACTION FORCE	: 20g min.
MECHANICAL LIFE	: 100 CYCLES min.

ENVIRONMENTAL DATA





TEMPERATURE RANGE	: -40°C TO +105°C
-------------------	-------------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.54mm PITCH, DUAL ROW
RIGHT ANGLE, PROFILE: 5.7mm

PART NO: P9404AXX-XX
1st XX=NO. OF CONTACTS(4-80)
2nd XX=TYPE OF PLATING

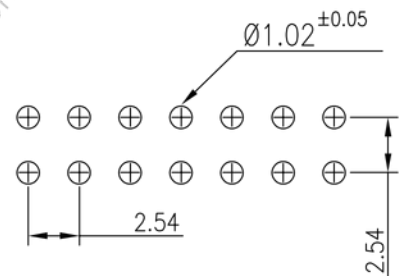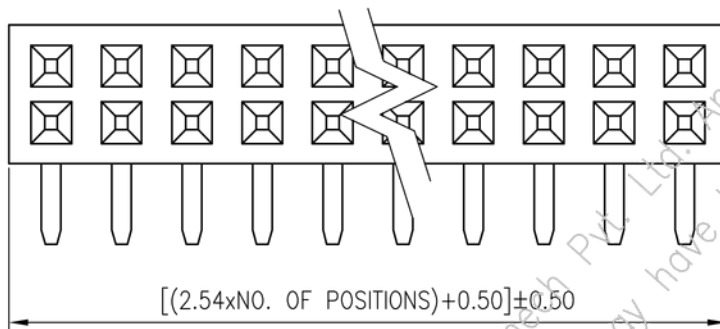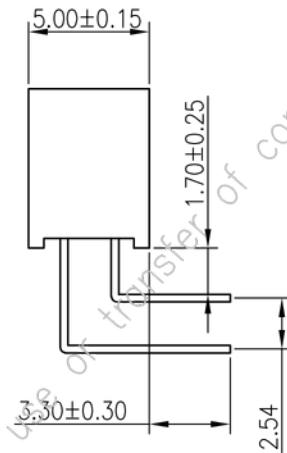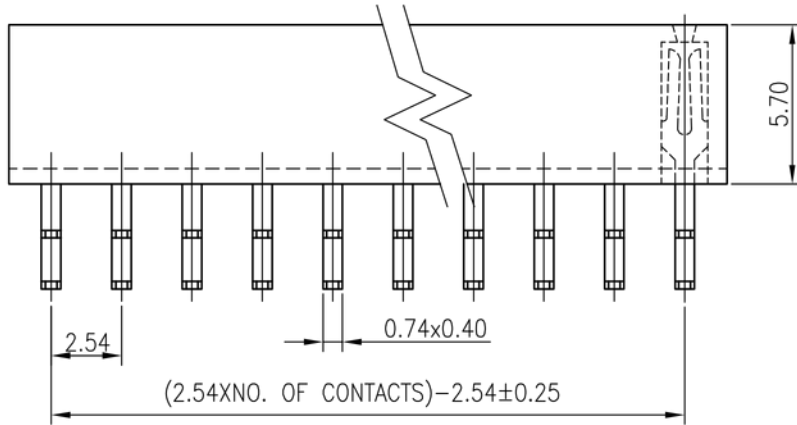

RECOMMENDED P.C.B. LAYOUT

ORDERING INFORMATION

P9404A-XX-XX

NO OF CONTACTS
(4-80)

TYPE OF PLATING

XX	PLATING
21	GOLD FLASH
22	0.75μ GOLD
23	GOLD FLASH ON CONTACT SIDE & TIN ON SOLDER SIDE
24	5μ TIN

MATES WITH

P9103,P9104
P9105,P9108

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.