




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.54mm PITCH SMT DOUBLE
ROW, PROFILE 3.50mm.

PART NO: P9405CXX-21AX

RoHS



PHYSICAL DATA:

INSULATION

MATERIAL : PA9T

FLAMMABILITY : UL94V-0

COLOR : BLACK

CONTACT

MATERIAL : COPPER ALLOY

SOLDER TAILS : GOLD PLATING

PACKAGING TYPE : STANDARD

ELECTRICAL DATA:

CURRENT RATING : 3A

INSULATION RESISTANCE : 1000M OHMS MIN

DIELECTRIC WITHSTANDING : 1000V AC/MIN

CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA





TEMPERATURE RANGE : -40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.54mm PITCH SMT DOUBLE ROW, PROFILE 3.50mm.

PART NO: P9405CXX-21AX

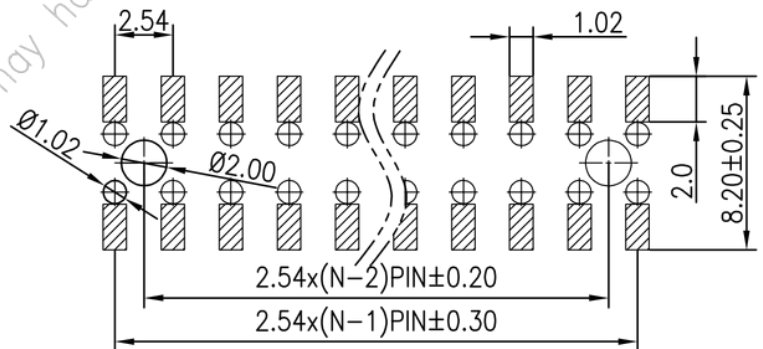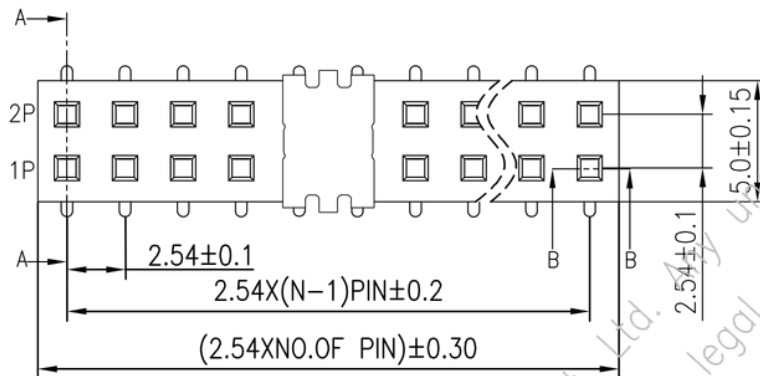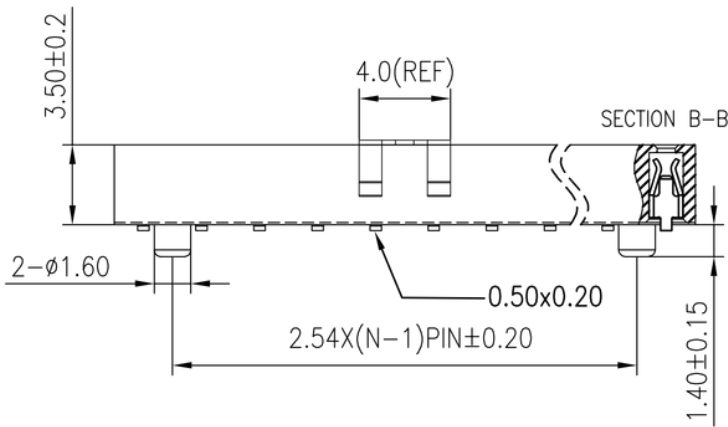

ORDERING INFORMATION

P9405CXX-21AX


NO OF CONTACTS
(04-80)

P9405CXX-21A - TUBE PACKING

P9405CXX-21AR - TAPE & REEL + CAP PACKING

RECOMMENDED P.C.B LAYOUT
PCB LAYOUT TOLERANCE(±0.05)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.