




DESCRIPTION : 2.54mm PITCH FEMALE HEADER, SINGLE ROW
SURFACE MOUNT, TYPE 1

PART NO: P9406-XX-2X
1st XX=NO. OF CONTACTS(3-40)
2nd 2X=TYPE OF PLATING

RoHS



PHYSICAL DATA

INSULATION

MATERIAL : THERMOPLASTIC
FLAMMABILITY : UL94V-0
COLOR : BLACK
CONTACT MATERIAL : COPPER ALLOY
SOLDER TAILS : REFER TABLE

ELECTRICAL DATA

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC
CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH FEMALE HEADER, SINGLE ROW
SURFACE MOUNT, TYPE 1

PART NO: P9406-XX-2X
1st XX=NO. OF CONTACTS(3-40)
2nd 2X=TYPE OF PLATING

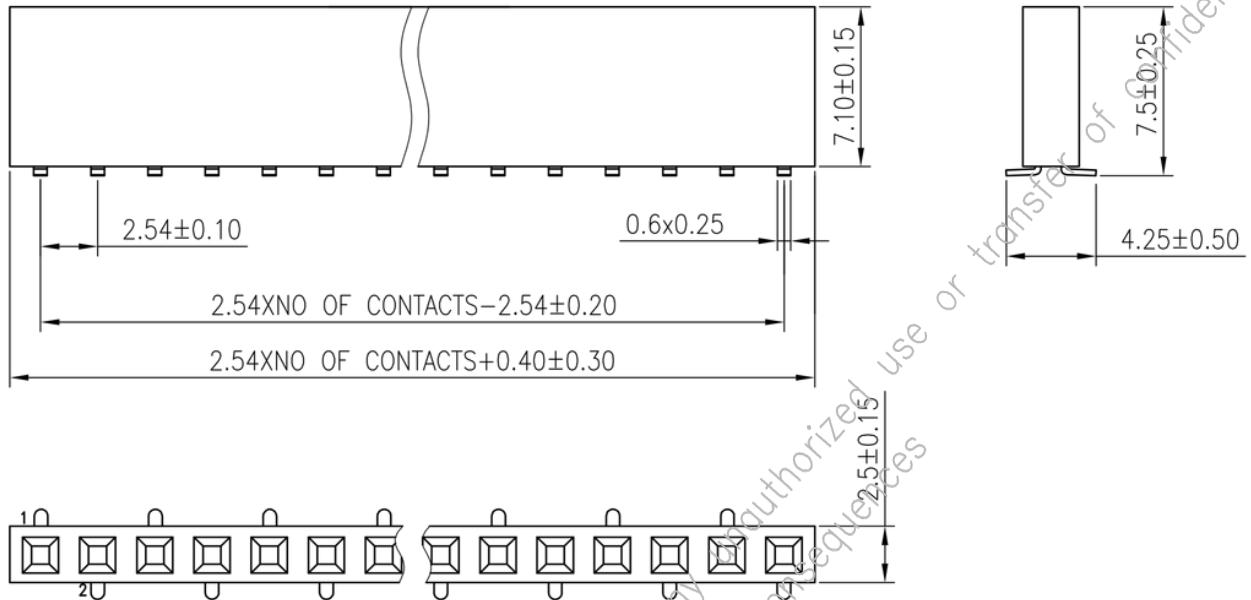


ORDERING INFORMATION

P9406-XX-2X

NO OF CONTACTS
(3-40)

2X	PLATING
21	GOLD FLASH
22	0.25μ GOLD
23	GOLD FLASH ON CONTACT SIDE & TIN ON SOLDER SIDE
24	5μ TIN

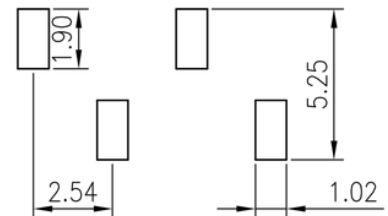

RECOMMENDED P.C.B LAYOUT

TOLERANCE±0.05

Projection:



Scale: **NTS**

Sht. Size: **A4**

Gen. Tol.:±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in