




DESCRIPTION : FEMALE HEADER 2.54x7.87mm PITCH, DOUBLE ROW
SIDE ENTRY, RIGHT ANGLE 130PIN WITH 3.20mm TAIL

PART NO: P9410-130128

RoHS



PHYSICAL DATA(CONNECTOR)

INSULATION	:	
MATERIAL	:	PPS/LCP
FLAMMABILITY	:	UL94V-0
COLOUR	:	BROWN/BLACK COLOUR
CONTACT PIN	:	PHOSPHOR BRONZE
CONTACT PLATED	:	GOLD PLATING
PACKAGING TYPE	:	STANDARD PACKING

ELECTRICAL DATA

CURRENT RATING	:	3A
CONTACT RESISTANCE	:	12m OHMS MAX
INSULATION RESISTANCE	:	5000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC

ENVIRONMENTAL DATA




TEMPERATURE RANGE	:	-55°C TO +125°C
-------------------	---	-----------------



PROTECTRON[®]
ELECTROMECH (P) LTD


DESCRIPTION : FEMALE HEADER 2.54x7.87mm PITCH, DOUBLE ROW
SIDE ENTRY, RIGHT ANGLE 130PIN WITH 3.20mm TAIL

PART NO: P9410-130128

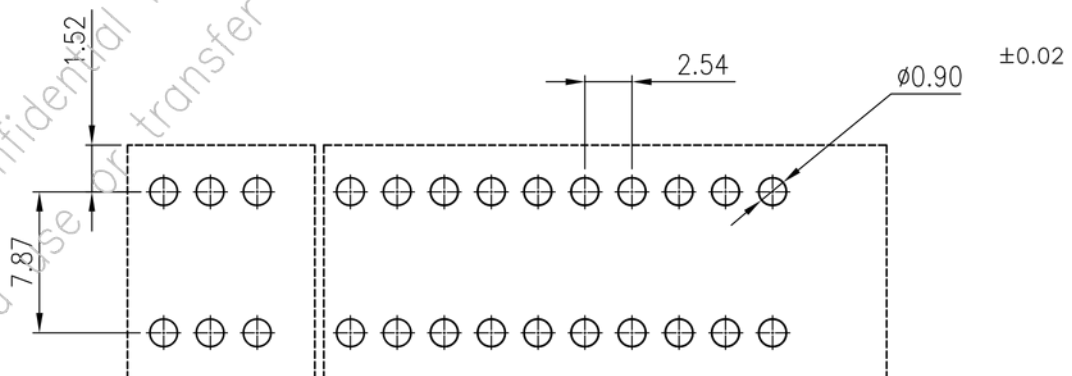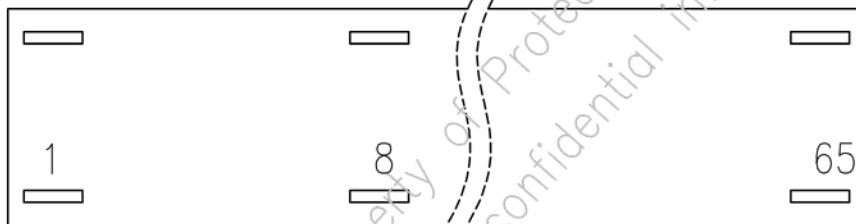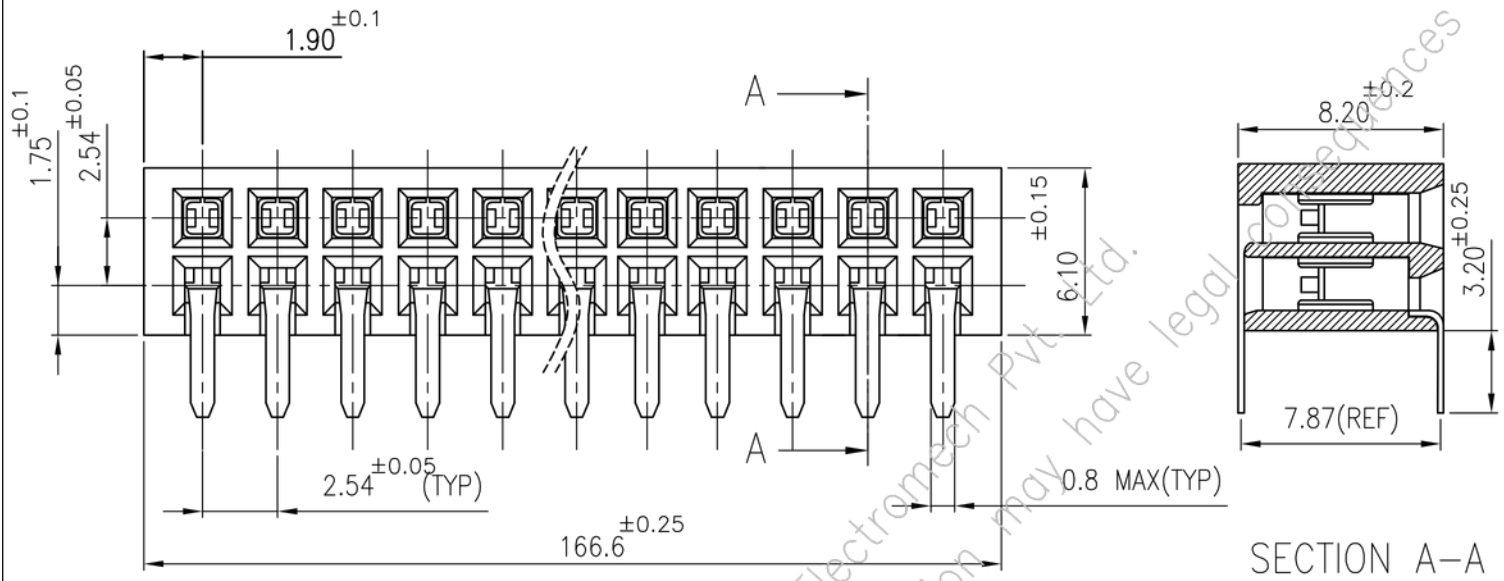

RECOMMENDED P.C.B LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.3\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.