




DESCRIPTION: 2.54X7.87mm PITCH FEMALE HEADER, DOUBLE
ROW SIDE ENTRY

PART NO: P9410-XX-2X

RoHS



PHYSICAL

INSULATION	
MATERIAL	: GLASS FILLED THERMOPLASTIC POLYESTER
FLAMMABILITY	: UL94V-0
CONTACT	
MATERIAL	: COPPER ALLOY
FINISH	: REFER TABLE
PACKAGING TYPE	: STANDARD

ELECTRICAL

CURRENT RATING	: 3A
INSULATION RESISTANCE	: 5000M OHMS MIN
DIELECTRIC WITHSTANDING	: 500V AC
CONTACT RESISTANCE	: 20m OHMS MAX

MECHANICAL DATA

INSERTION FORCE	: 200gms max.
WITHDRAWAL FORCE	: 20gms min.
MECHANICAL LIFE	: 100 CYCLES MIN.

ENVIRONMENTAL DATA


TEMPERATURE RANGE	: -40°C TO +105°C
-------------------	-------------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION: 2.54X7.87mm PITCH FEMALE HEADER, DOUBLE
ROW SIDE ENTRY

PART NO: P9410-XX-2X

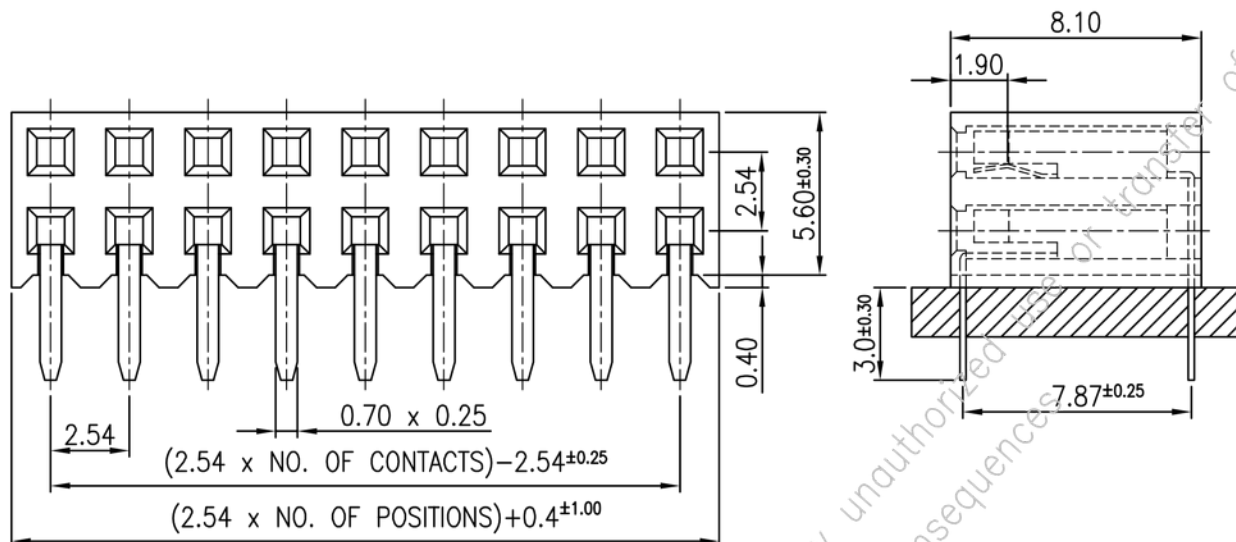


P9410-XX-2X

XX=NO. OF CONTACTS

X	PLATING
1	GOLD
2	0.75μ Au
3	SELECTIVE
4	TIN

2.54±0.05(NON-ACCUM.)

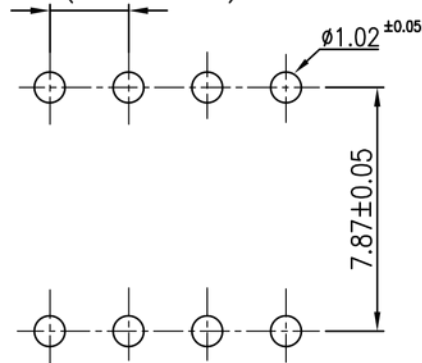

RECOMMENDED P.C.B LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2° ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.