


DESCRIPTION: 2.54X7.87mm PITCH FEMALE HEADER, DOUBLE
ROW SIDE ENTRY

PART NO: P9410-XX-2X

RoHS



PHYSICAL

INSULATION

MATERIAL : GLASS FILLED THERMOPLASTIC POLYESTER

FLAMMABILITY : UL94V-0

CONTACT

MATERIAL : COPPER ALLOY

FINISH : REFER TABLE

PACKAGING TYPE : STANDARD

ELECTRICAL

CURRENT RATING : 3A

INSULATION RESISTANCE : 5000M OHMS MIN

DIELECTRIC WITHSTANDING : 500V AC

CONTACT RESISTANCE : 20m OHMS MAX

MECHANICAL DATA

INSERTION FORCE : 200gms max.

WITHDRAWAL FORCE : 20gms min.

MECHANICAL LIFE : 100 CYCLES MIN.

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION: 2.54X7.87mm PITCH FEMALE HEADER, DOUBLE
ROW SIDE ENTRY


PART NO: P9410-XX-2X

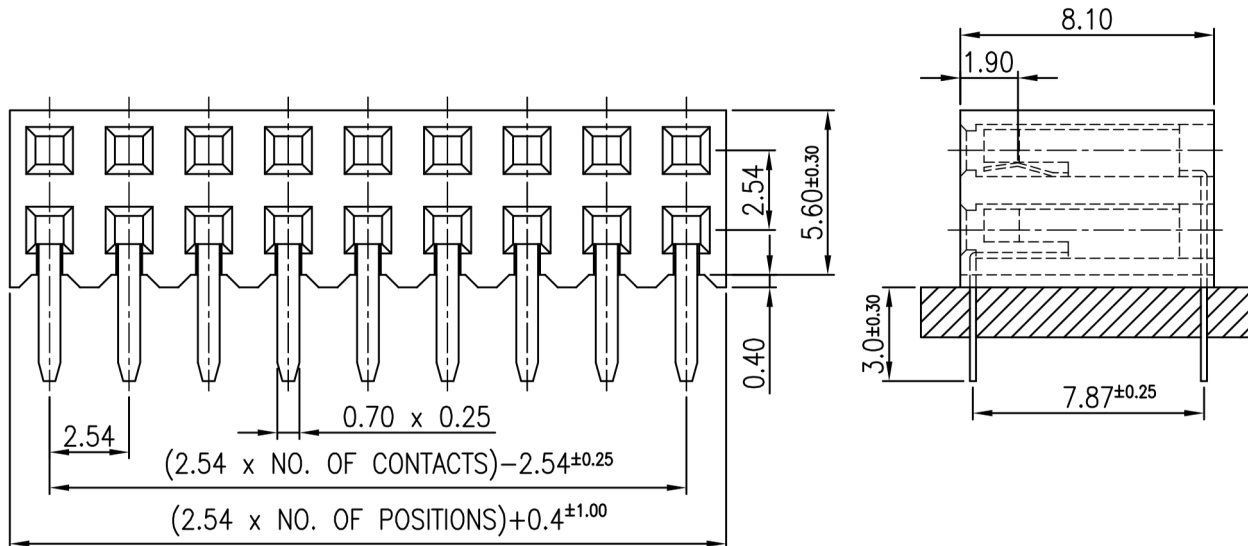

P9410-XX-2X

XX=NO. OF CONTACTS

X	PLATING
1	GOLD
2	0.75μ Au
3	SELECTIVE
4	TIN

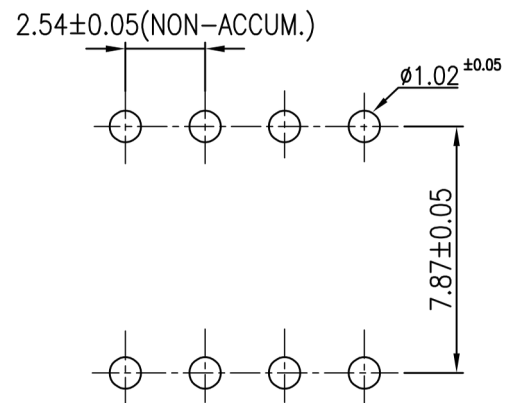

RECOMMENDED P.C.B LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2° ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.