




DESCRIPTION : 2.0mm PITCH FEMALE HEADER , SINGLE ROW

PART NO: P9411AXX-XX

RoHS



PHYSICAL DATA

MATERIAL

INSULATOR BODY : GLASS FILLED POLYESTER, UL 94V-0

CONTACT : PHOSPHORS BRONZE

ELECTRICAL DATA

CURRENT RATING : 1A

INSULATION RESISTANCE : 5000M Ω MIN

CONTACT RESISTANCE : 20m Ω MAX

DIELECTRIC WITHSTANDING : 500V AC FOR ONE MINUTE

MECHANICAL DATA

INSERTION FORCE : 0.7N AVG.

WITHDRAWAL FORCE : 0.5N AVG

MECHANICAL LIFE : 100 CYCLES MIN




ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40° TO +105°C



DESCRIPTION : 2.0mm PITCH FEMALE HEADER , SINGLE ROW

PART NO: P9411AXX-XX

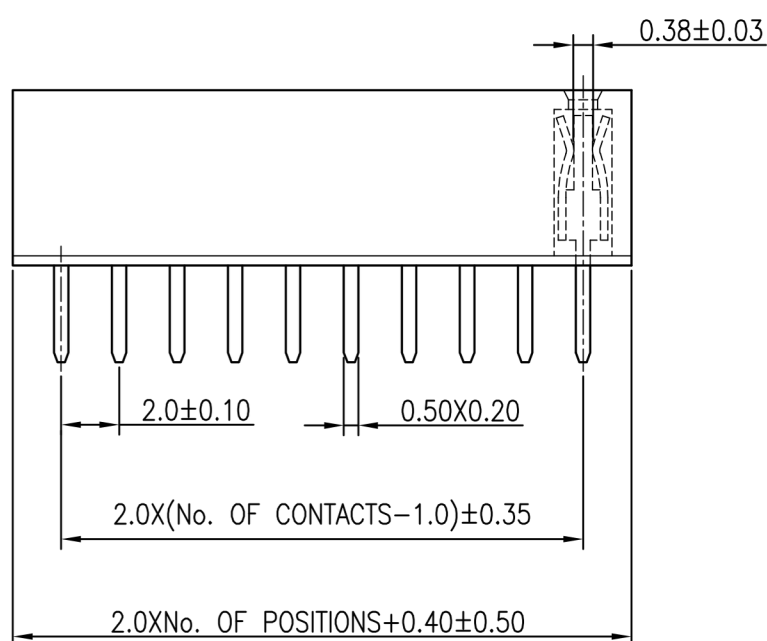

RECOMMENDED P.C.B. LAYOUT
(TOLERANCE±0.05)

ORDERING INFORMATION

P9411AXX-XX

NO.OF CONTACTS
(04-100)

PLATING

Gold flash	21
0.75 μ Au SELECTIVE	22
Gold	23
Tin	24

Projection:



Scale: **NTS**

Sht. Size: **A4**

Gen. Tol.:±0.5mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.