




DESCRIPTION : 2mm PITCH IDC SOCKET, DUAL ROW.

PART NO: P9413IDS-XX-21
XX=NO. OF CONTACTS



PHYSICAL DATA

INSULATION

MATERIAL

: PBT+30%GF

CONTACT

: COPPER ALLOY, MATING AREA GOLD PLATED,
TIN PLATING ON SOLDER AREA.

FLAMMABILITY

: UL94V- 0

PACKAGING TYPE

: TUBE/TRAY

ELECTRICAL DATA

CURRENT RATING

: 1A AC,DC

INSULATION RESISTANCE

: 100MΩ MIN

DIELECTRIC WITHSTANDING

: 500V AC/MIN

CONTACT RESISTANCE

: 20m OHMS MAX

VOLTAGE RATING

: 250V AC/DC

ENVIRONMENTAL DATA

TEMPERATURE RANGE

: -40°C TO +105°C

PROCESS RATING


: 180°C FOR 5SEC



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2mm PITCH IDC SOCKET, DUAL ROW.

PART NO: P9413IDS-XX-21
XX=NO. OF CONTACTS

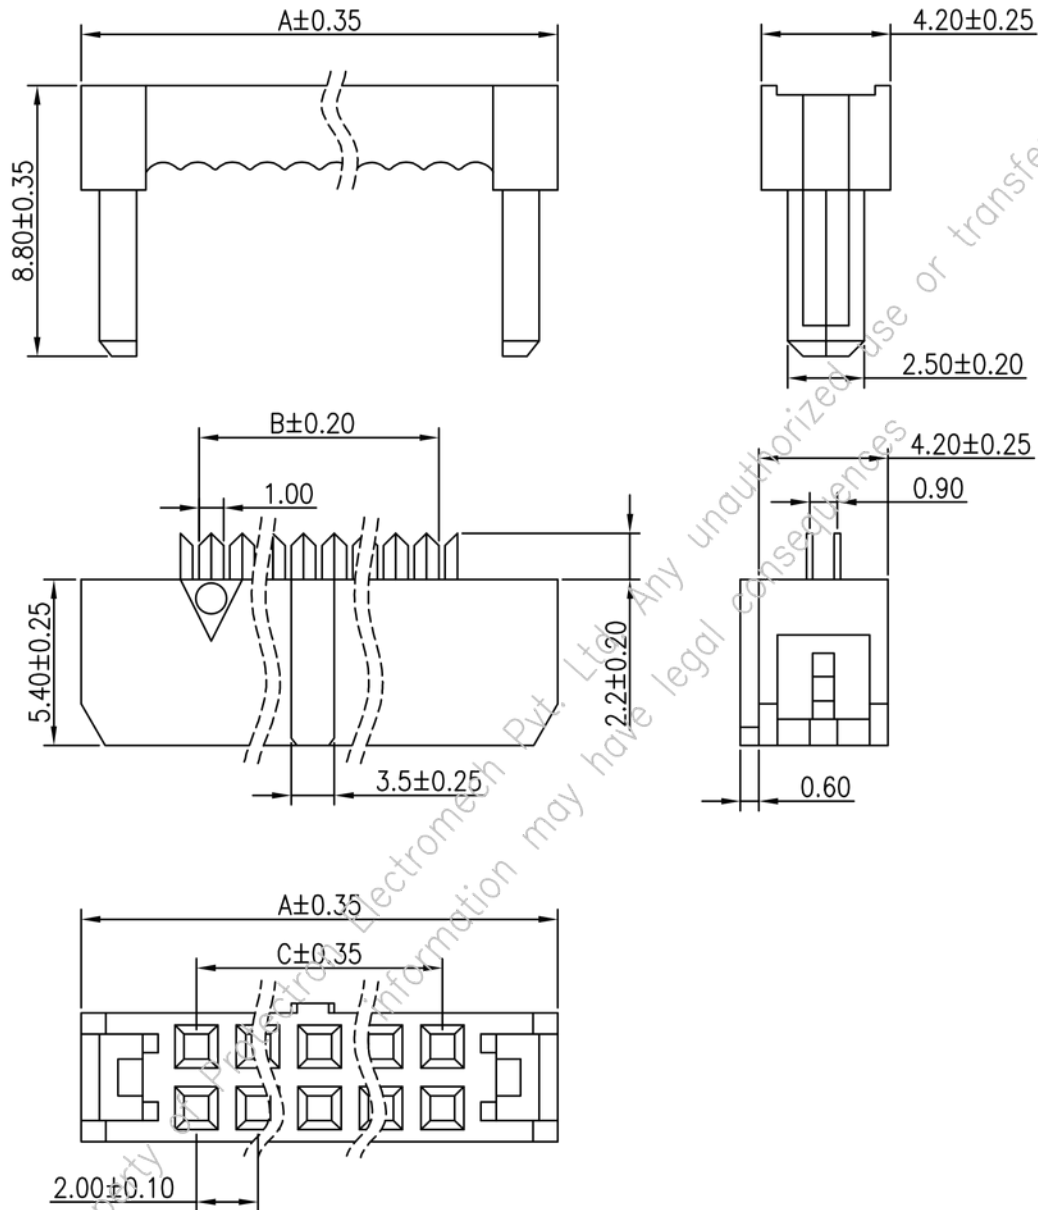

DESCRIPTION : 2mm PITCH IDC SOCKET, DUAL ROW.

PART NO: P9413IDS-XX-21
XX=NO. OF CONTACTS

NO OF CONTACTS	DIMENSIONS		
	A	B	C
6	11.20	5.00	4.00
8	13.20	7.00	6.00
10	15.20	9.00	8.00
12	17.20	11.00	10.00
14	19.20	13.00	12.00
16	21.20	15.00	14.00
18	23.20	17.00	16.00
20	25.20	19.00	18.00
22	27.20	21.00	20.00
24	29.20	23.00	22.00
26	31.20	25.00	24.00
28	33.20	27.00	26.00
30	35.20	29.00	28.00
32	37.20	31.00	30.00
34	39.20	33.00	32.00

NO OF CONTACTS	DIMENSIONS		
	A	B	C
36	41.20	35.00	34.00
38	43.20	37.00	36.00
40	45.20	39.00	38.00
44	49.20	43.00	42.00
48	53.20	47.00	46.00
50	55.20	49.00	48.00
54	59.20	53.00	52.00
56	61.20	55.00	54.00
60	65.20	59.00	58.00
62	67.20	61.00	60.00
64	69.20	63.00	62.00
68	73.20	67.00	66.00
80	85.20	79.00	78.00
100	105.20	99.00	98.00

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.2

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.