




DESCRIPTION : 2mm PITCH DIP PLUG

PART NO: P9413IDSA-XX-24
XX=NO. OF CONTACTS(08-60)

RoHS

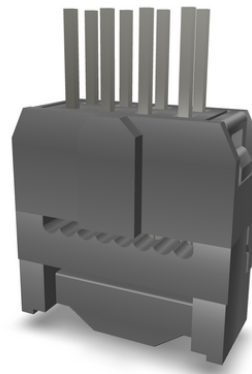

PHYSICAL

INSULATION

MATERIAL	:	PBT
CONTACT	:	COPPER ALLOY, TIN PLATED
FLAMMABILITY	:	UL94V- 0
PACKAGING TYPE	:	TUBE/TRAY

ELECTRICAL

CURRENT RATING	:	1A
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC/MIN
CONTACT RESISTANCE	:	20m OHMS MAX

ENVIRONMENTAL DATA







TEMPERATURE RANGE	:	-40°C TO +105°C
PROCESS RATING	:	180°C FOR 5SEC



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2mm PITCH DIP PLUG

PART NO: P9413IDSA-XX-24
XX=NO. OF CONTACTS(08-60)

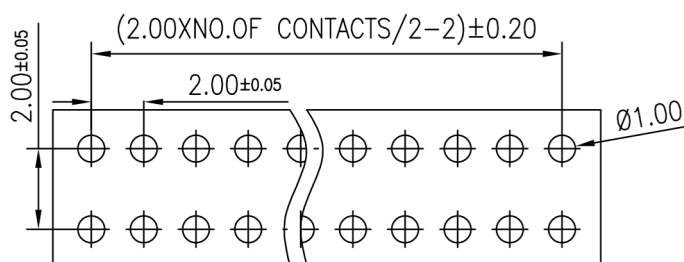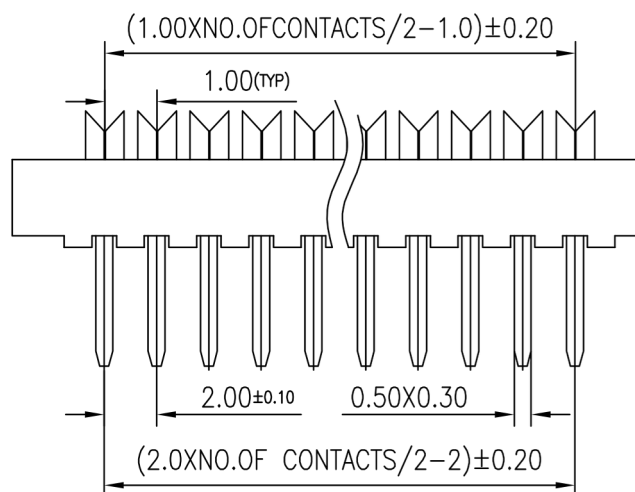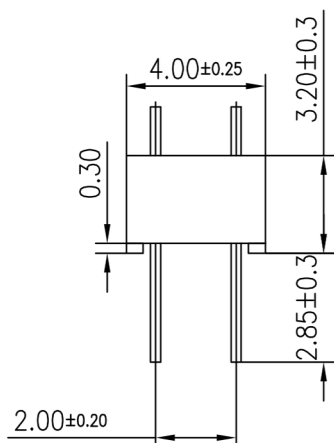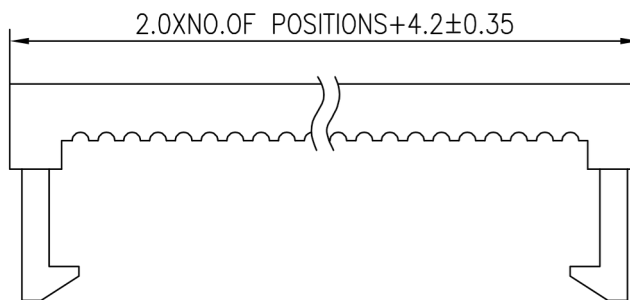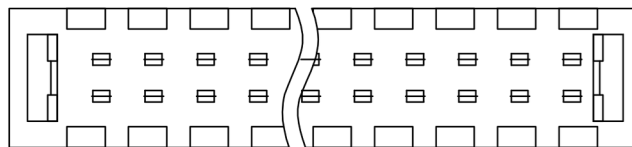

RECOMMENDED P.C.B. LAYOUT
(PCB BOARD TOLERANCE ±0.05)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±1°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.