




DESCRIPTION : FEMALE HEADER 2.0mm PITCH DOUBLE ROW,
SMT, BOTTOM ENTRY

PART NO: P9415AXX-XX
1st XX=NO. OF CONTACTS
2nd XX=TYPE OF PLATING

RoHS



PHYSICAL DATA

INSULATION	:	
MATERIAL	:	THERMOPLASTIC
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK
CONTACT	:	
MATERIAL	:	COPPER ALLOY
FINISH	:	REFER TABLE
PACKAGING TYPE	:	STANDARD

ELECTRICAL DATA

CURRENT RATING	:	2A
CONTACT RESISTANCE	:	20m OHMS MAX
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC/MIN

ENVIRONMENTAL DATA




TEMPERATURE RANGE	:	-40°C TO +105°C
-------------------	---	-----------------



PROTECTRON
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.0mm PITCH DOUBLE ROW,
SMT, BOTTOM ENTRY

PART NO: P9415AXX-XX
1st XX=NO. OF CONTACTS
2nd XX=TYPE OF PLATING

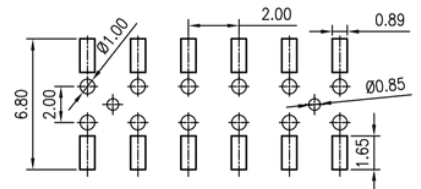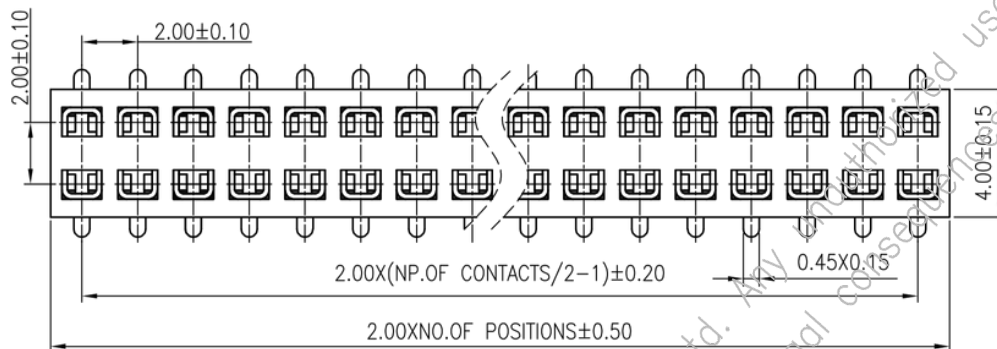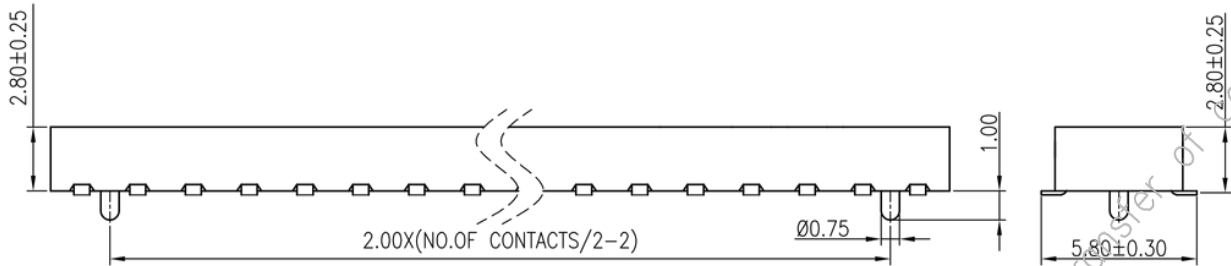

RECOMMENDED P.C BOARD LAYOUT
(PCB TOLERANCE±0.05)

ORDERING INFORMATION

P9415AXX-XX

MATES WITH

P9113,P9114
P9115,P9118

NO OF CONTACTS
(04-80)

XX	PLATING
21	GOLD FLASH
22	0.75μ GOLD
23	GOLD FLASH ON CONTACT SIDE & TIN ON SOLDER SIDE

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±1°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in