




DESCRIPTION : FEMALE HEADER 2.0mm PITCH, SMT, WITHOUT ALIGNMENT

PART NO: P9415DXX-21

RoHS



PHYSICAL

INSULATOR : POLYESTER, UL94V-0
CONTACT : PHOSPHOR BRONZE, GOLD PLATED

ELECTRICAL

CURRENT RATING : 1.5A
CONTACT RESISTANCE : 20m Ω MAX
INSULATION RESISTANCE : 1000M Ω MIN
DIELECTRIC VOLTAGE : 500V AC FOR ONE MINUTE

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40° TO +105° C
SOLDERING TEMP RANGE : 260°C FOR 5SEC



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.0mm PITCH, SMT, WITHOUT ALIGNMENT

PART NO: P9415DXX-21

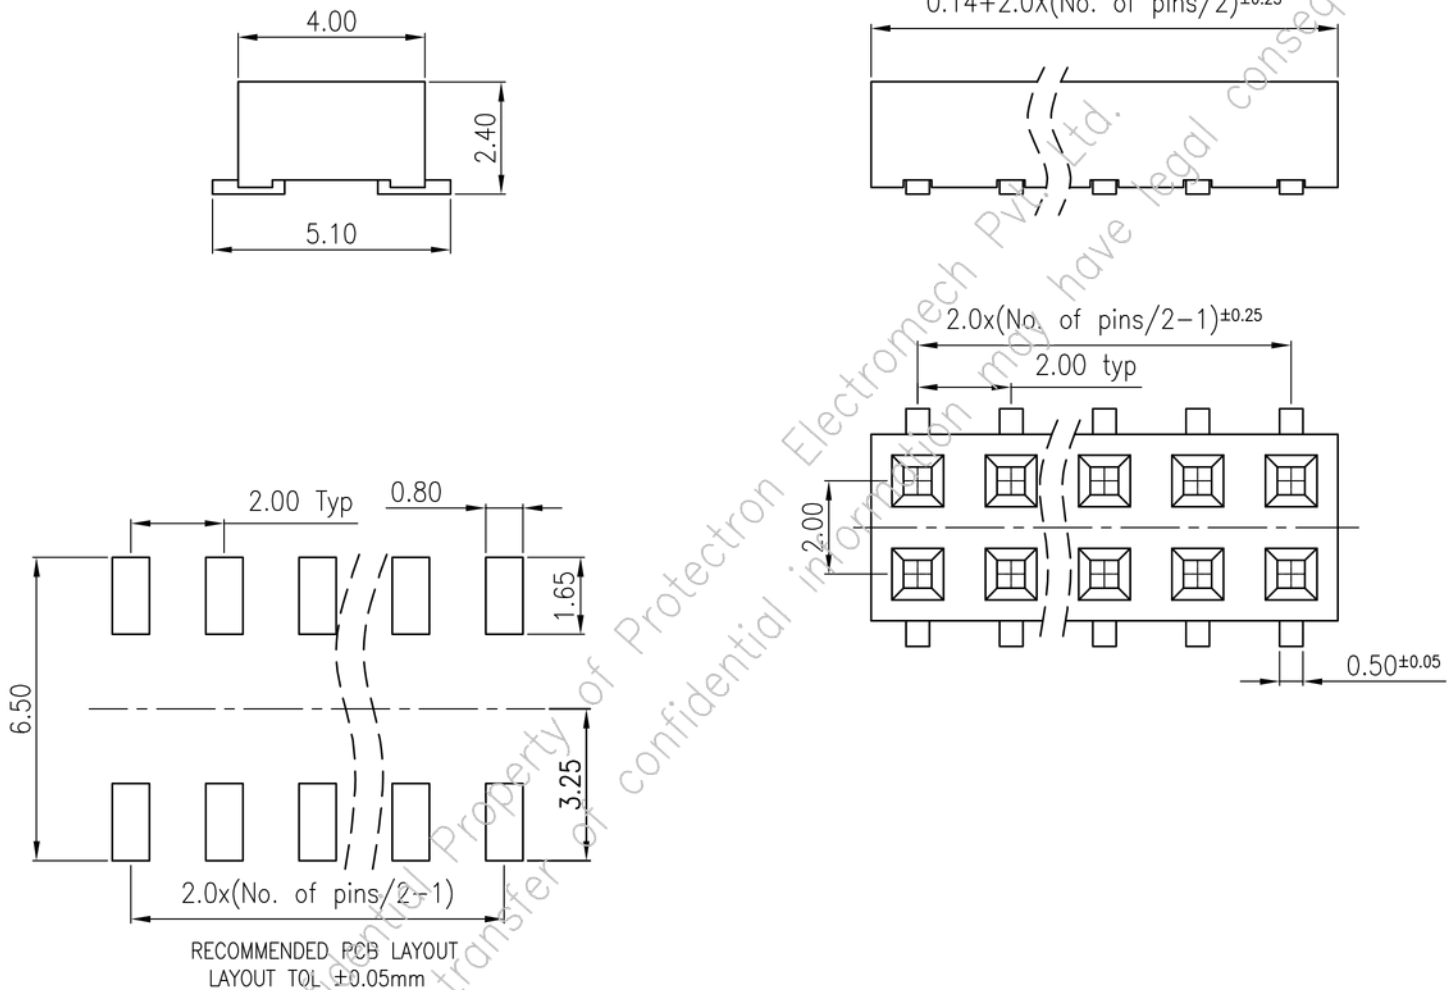

MATES WITH

P9113, P9114


P9115, P9118

ORDERING INFORMATION

P9415DXX-21

NO. OF CONTACTS
(04-80)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.5mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.