




DESCRIPTION : FEMALE HEADER 2.00mm PITCH SIDE ENTRY
DOUBLE ROW WITH POLARIZATION.

PART NO: P9417-XX-21



PHYSICAL DATA

INSULATION	
MATERIAL	: THERMOPLASTIC
FLAMMABILITY	: UL94V-0
COLOR	: BLACK COLOR
CONTACT	: COPPER ALLOY, GOLD PLATED
PACKAGING TYPE	: STANDARD PACKING

ELECTRICAL DATA

CURRENT RATING	: 1.5A
INSULATION RESISTANCE	: 1000M OHMS MIN
CONTACT RESISTANCE	: 20m OHMS MAX
DIE ELECTRIC WITHSTAND	: 450V AC / 1 MIN

MECHANICAL DATA

PIN INSERTION FORCE	: 160g MAX
PIN EXTRACTION FORCE	: 50g MIN
MECHANICAL LIFE CYCLE	: 200 MIN

ENVIRONMENTAL DATA


TEMPERATURE RANGE	: -40°C TO +105°C
-------------------	-------------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.00mm PITCH SIDE ENTRY
DOUBLE ROW WITH POLARIZATION.

PART NO: P9417-XX-21

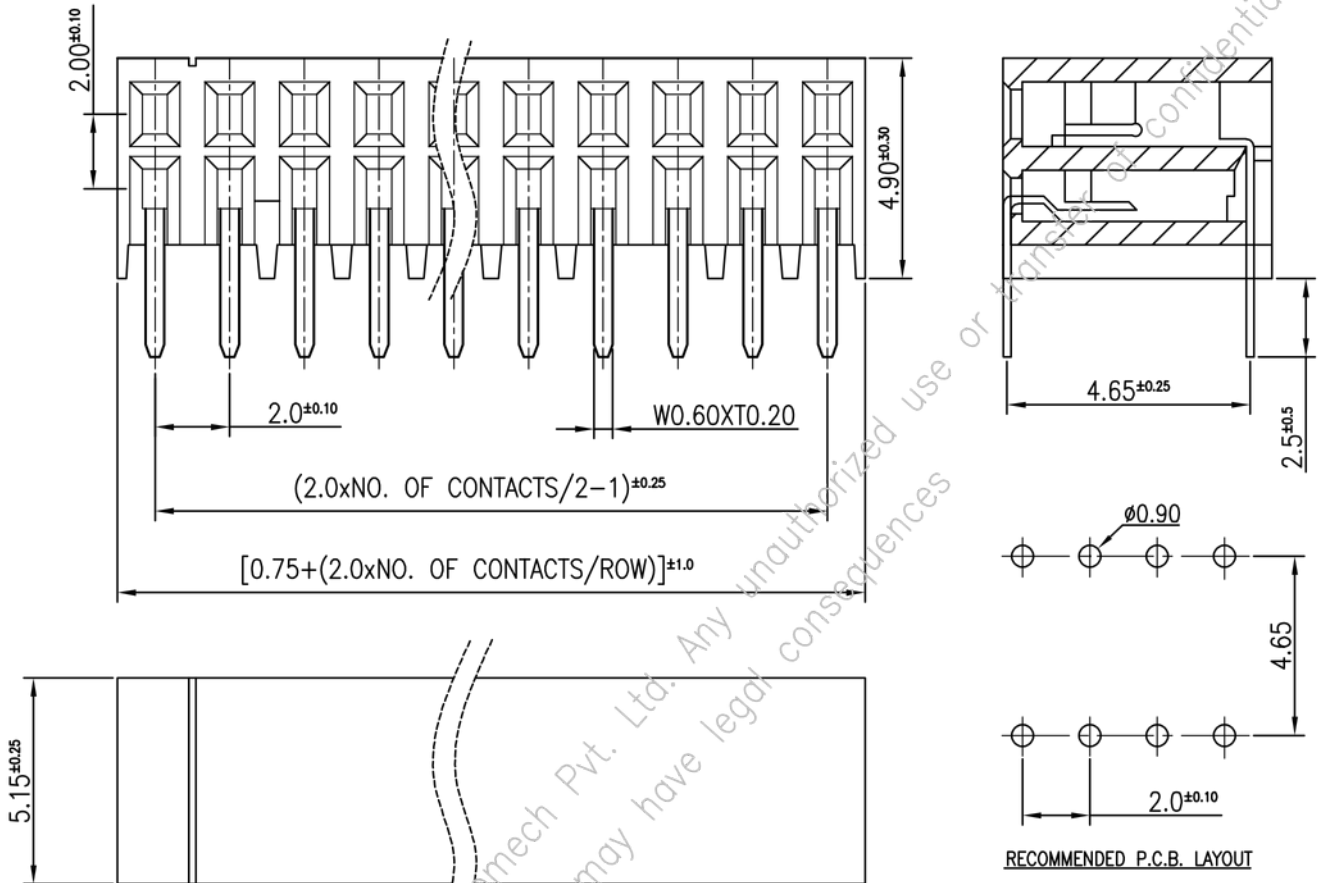

MATES WITH

P9113, P9114
P9115, P9118

ORDERING INFORMATION

P9417-XX-21

NO OF CONTACTS

Projection:



Scale: **NTS**

Sht. Size: **A4**

Gen. Tol.: $0.35\text{mm} \pm 2$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in