




DESCRIPTION: FEMALE HEADER 2.00mm PITCH ELEVATED TYPE
DOUBLE ROW, GOLD PLATED, RoHS

PART NO: P941D0XXX21

RoHS



PHYSICAL

INSULATION	
MATERIAL	: POLYESTER UL 94V-0
CONTACT	
MATERIAL	: PHOSPHOR BRONZE
FINISH	: GOLD PLATED
PACKAGING TYPE	: STANDARD

ELECTRICAL

CURRENT RATING	: 3A
CONTACT RESISTANCE	: 20m OHMS MAX
INSULATION RESISTANCE	: 1000M OHMS MIN
DIELECTRIC WITHSTANDING	: 1000V AC FOR ONE MINUTE

ENVIRONMENTAL DATA





TEMPERATURE RANGE	: -40°C TO +105°C
PROCESS RATING	: 200°C FOR 5SEC



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION: FEMALE HEADER 2.00mm PITCH ELEVATED TYPE
DOUBLE ROW, GOLD PLATED, RoHS

PART NO: P941D0XXX21

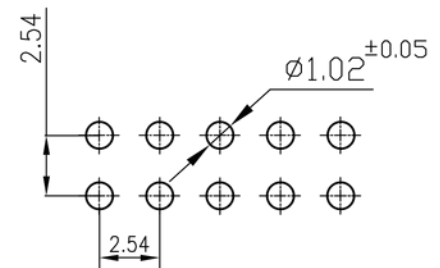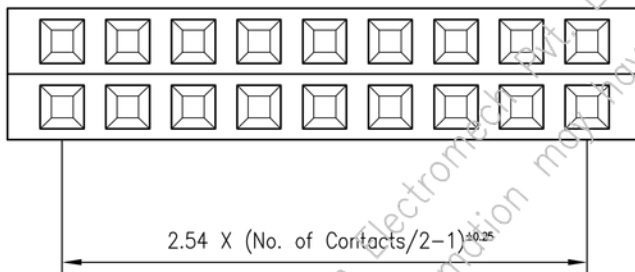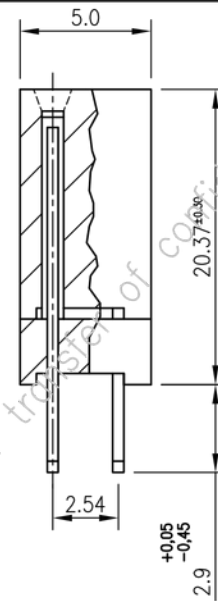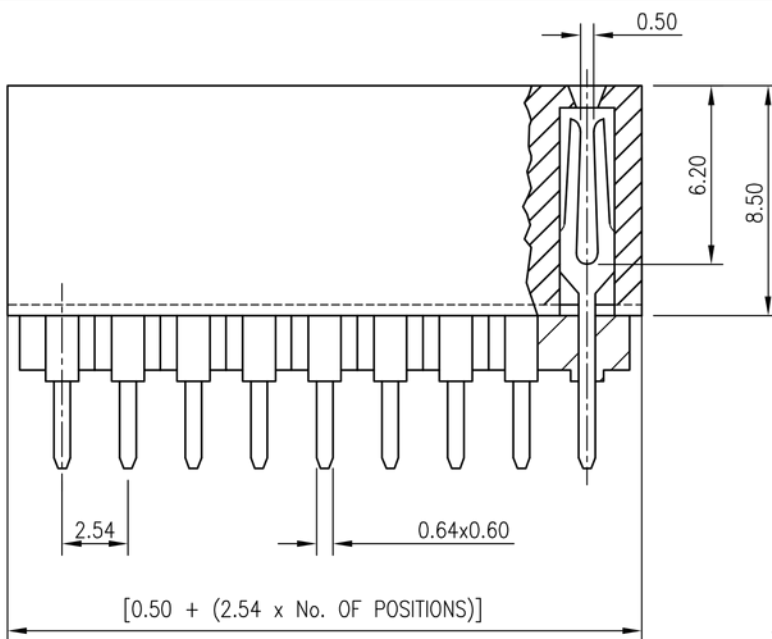

RECOMMENDED P.C.B. LAYOUT

ORDERING INFORMATION

P941D0XXX21

NO OF CONTACTS

MATES WITH

P9113, P9114

P9115, P9118

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in