




DESCRIPTION : FEMALE HEADER 1.27mm, SINGLE ROW,
STRAIGHT, PROFILE=4.60mm,RoHS

PART NO: P9431-XXX2-22

RoHS



PHYSICAL DATA

MATERIAL DATA:

INSULATOR BODY : PA9T, UL94V-0, BLACK
CONTACT : COPPER ALLOY, 0.75 μ GOLD PLATED

ELECTRICAL DATA

RATED CURRENT : 1A
INSULATION RESISTANCE : 1000M Ω MIN
CONTACT RESISTANCE : 20m Ω MAX
DIELECTRIC WITHSTANDING : 500V AC FOR ONE MINUTE

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40° TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 1.27mm, SINGLE ROW,
STRAIGHT, PROFILE=4.60mm,RoHS

PART NO: P9431-XXX2-22

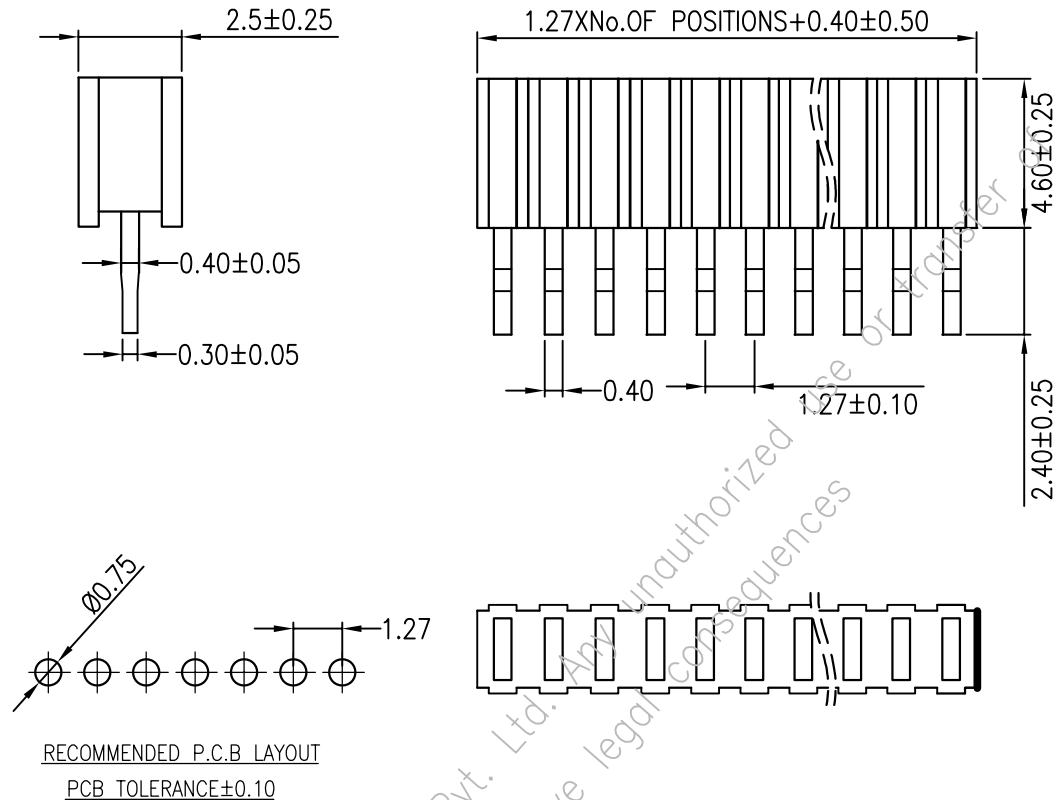

MATES WITH

P9131, P9132


P9136

ORDERING INFORMATION

P9431-XXX2-22

NO.OF CONTACTS
(02-50)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.5\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in