




DESCRIPTION : FEMALE HEADER 1.27mm, SINGLE ROW,
STRAIGHT, PROFILE=4.60mm,RoHS

PART NO: P9431-XXX2-22

RoHS



PHYSICAL DATA

MATERIAL DATA:

INSULATOR BODY	:	PA9T, UL94V-0,BLACK
CONTACT	:	COPPER ALLOY, 0.75 μ GOLD PLATED

ELECTRICAL DATA

RATED CURRENT	:	1A
INSULATION RESISTANCE	:	1000M Ω MIN
CONTACT RESISTANCE	:	20m Ω MAX
DIELECTRIC WITHSTANDING	:	500V AC FOR ONE MINUTE

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40° TO +105°C
-------------------	---	----------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 1.27mm, SINGLE ROW,
STRAIGHT, PROFILE=4.60mm,RoHS

PART NO: P9431-XXX2-22

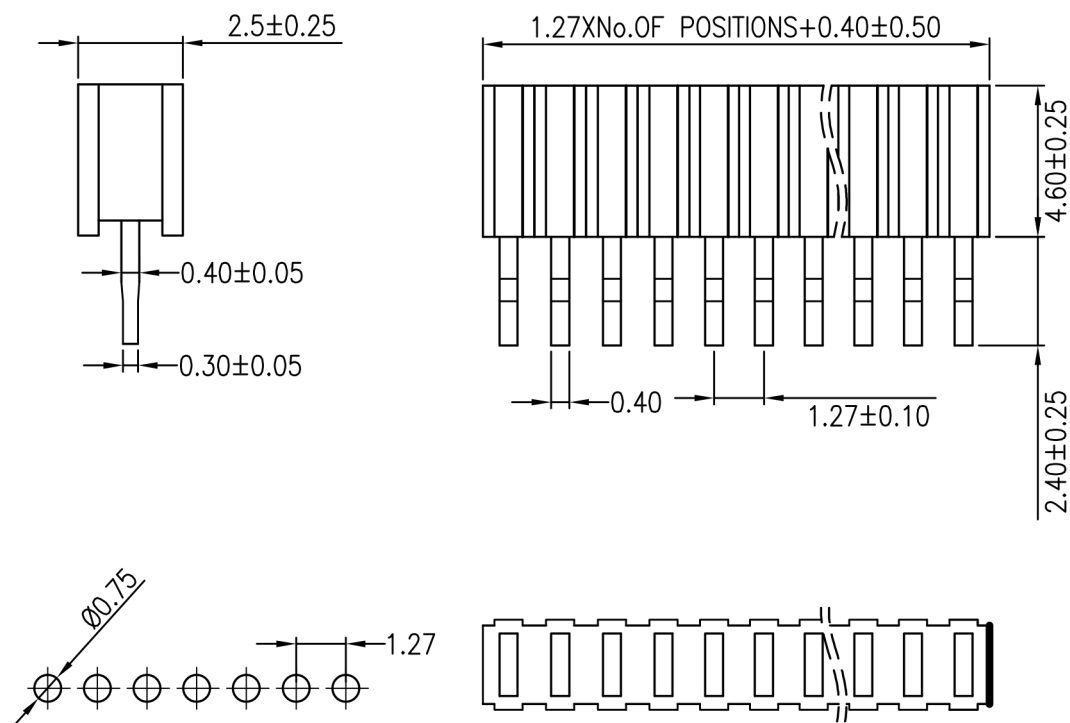

RECOMMENDED P.C.B LAYOUT
PCB TOLERANCE±0.10

MATES WITH

P9131, P9132

P9136

ORDERING INFORMATION

P9431-XXX2-22

NO.OF CONTACTS
(02-50)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.5mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.