




DESCRIPTION : FEMALE HEADER 1.27mm PITCH, SINGLE ROW,
PROFILE-6.0mm, SURFACE MOUNT

PART NO: P9436-XX-X-XX

RoHS



PHYSICAL DATA

INSULATION : POLYESTER, UL 94V-0, BLACK COLOR
CONTACT : PHOSPHOR BRONZE, GOLD FLASH

ELECTRICAL DATA

CURRENT RATING : 1AMP
CONTACT RESISTANCE : 20mΩ MAX
INSULATION RESISTANCE : 1000MΩ MIN
DIELECTRIC WITHSTANDING : 500V AC

ENVIRONMENTAL DATA




TEMPERATURE RANGE : -40°C TO +105°C
SOLDERING TEMPERATURE : 260°C FOR 3 TO 5 SEC MAX.




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 1.27mm PITCH, SINGLE ROW,
PROFILE-6.0mm, SURFACE MOUNT


PART NO: P9436-XX-X-XX

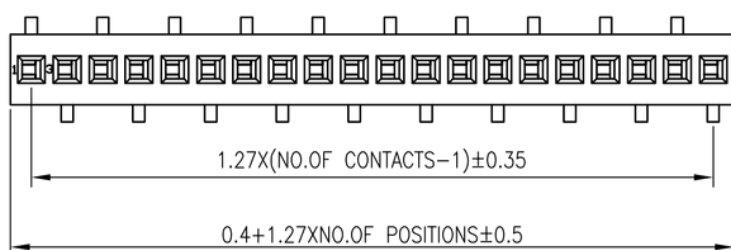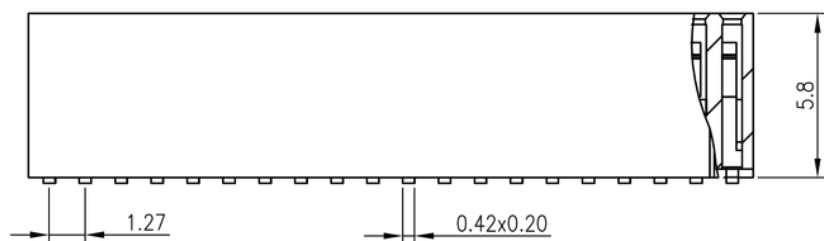


SURFACE MOUNT B1 TYPE

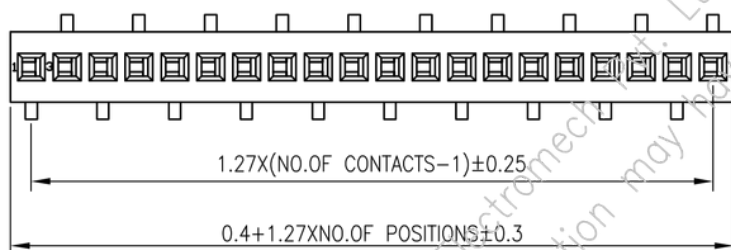

SURFACE MOUNT B2 TYPE

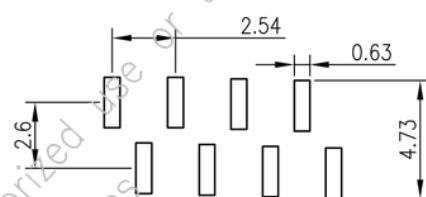

RECOMMENDED PCB LAYOUT
(SURFACE MOUNT B1 TYPE)

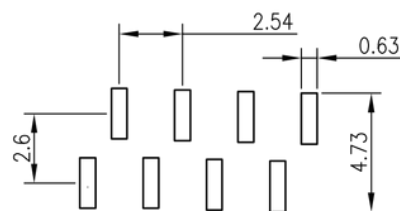

RECOMMENDED PCB LAYOUT
(SURFACE MOUNT B2 TYPE)

ORDERING INFORMATION

P9436-XX-X-XX

NO.OF CONTACTS

1-SURFACE MOUNT B1 TYPE
2-SURFACE MOUNT B2 TYPE

XX-PLATING

21-GOLD FLASH
23-SELECTIVE
24-TIN PLATED

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in