




DESCRIPTION : FEMALE HEADER 1.27X2.54mm PITCH, DOUBLE ROW,
PROFILE=5.70mm, SMT, ROHS

PART NO: P943A-XXX-2X



RoHS



PHYSICAL DATA

INSULATION

MATERIAL

: HI-TEMP. THERMOPLASTIC

FLAMMABILITY

: UL94V-0

COLOR

: BLACK

CONTACT

MATERIAL

: COPPER ALLOY

SOLDER TAILS

: SELECTIVE GOLD PLATED

PACKAGING TYPE

: STANDARD

ELECTRICAL DATA

CURRENT RATING

: 1A

CONTACT RESISTANCE

: 20mΩ MAX

INSULATION RESISTANCE

: 1000M OHMS MIN

DIELECTRIC WITHSTANDING

: 500V AC/MIN

ENVIRONMENTAL DATA

TEMPERATURE RANGE


: -40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 1.27X2.54mm PITCH, DOUBLE ROW,
PROFILE=5.70mm, SMT, ROHS

PART NO: P943A-XXX-2X

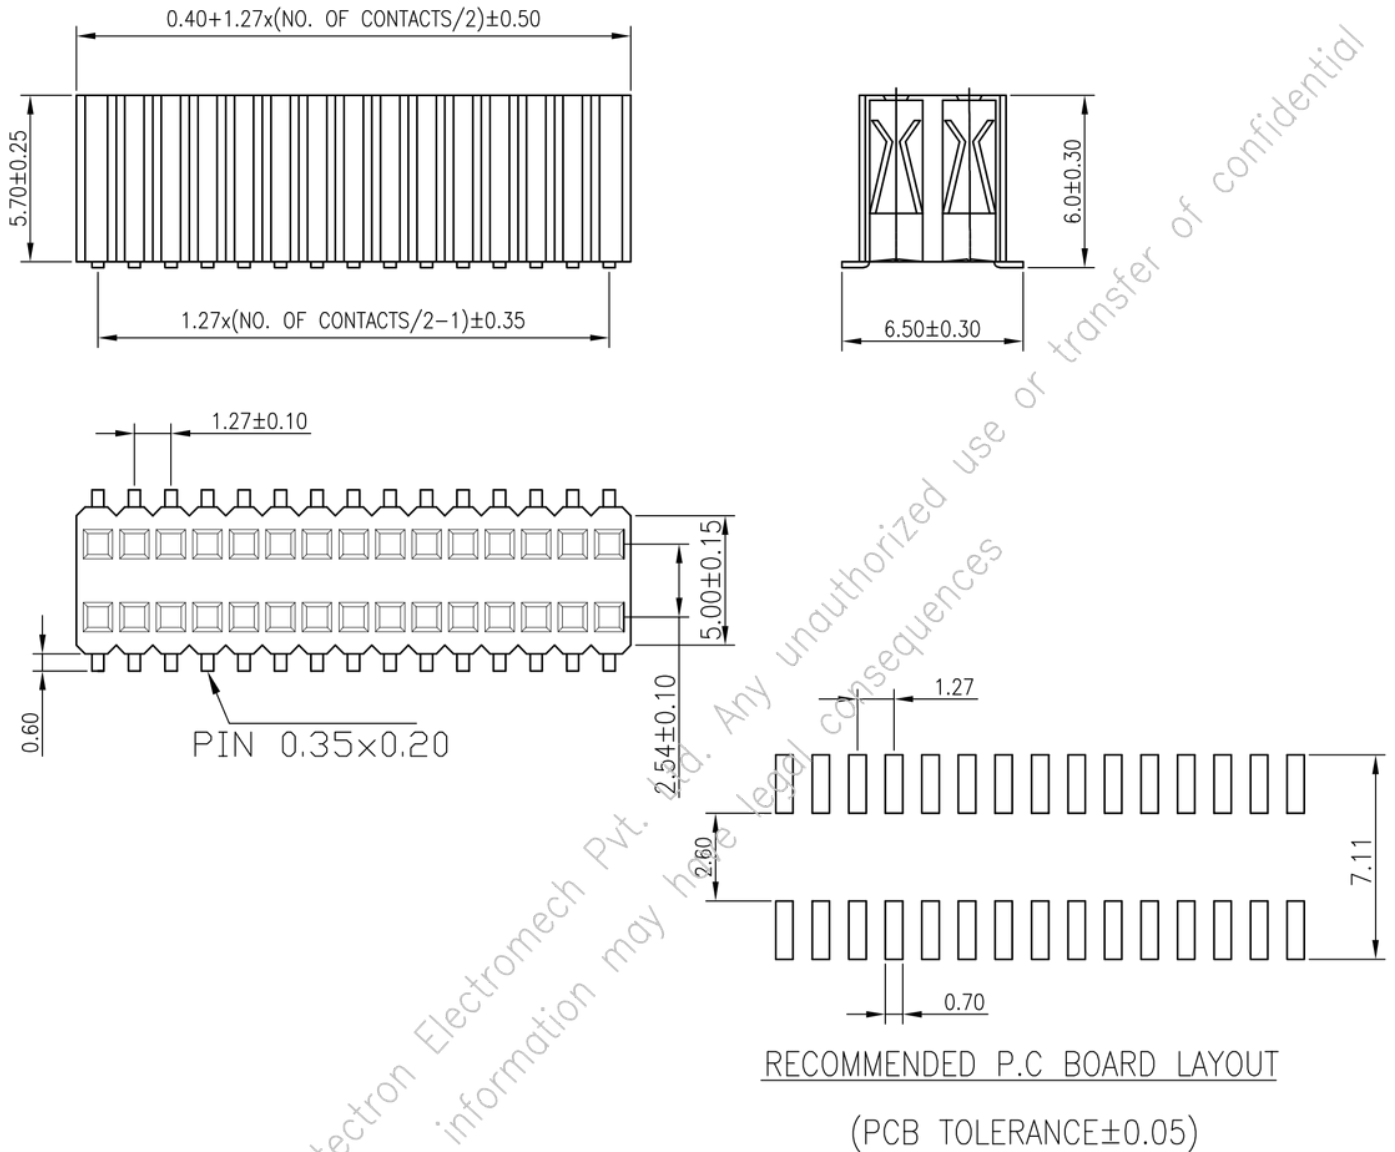

ORDERING INFORMATION

P943A-XXX-2X

NO OF CONTACTS
(06-100)

PLATING

1 GOLD FLASH
3 SELECTIVE
4 TIN PLATED

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.25

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.