


DESCRIPTION : 1.27 FEMALE HEADER STRAIGHT, 8.50mm BASE

PART NO: P943XDXXX4-2X

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: THERMOPLASTIC
FLAMMABILITY	: UL94V-0
COLOR	: BLACK
CONTACT	
MATERIAL	: COPPER ALLOY
SOLDER TAILS	: REFER TABLE
PACKAGING TYPE	: STANDARD

ELECTRICAL DATA

CURRENT RATING	: 1A
INSULATION RESISTANCE	: 1000M OHMS MIN
DIELECTRIC WITHSTANDING	: 300V AC
CONTACT RESISTANCE	: 20m OHMS MAX

ENVIRONMENTAL DATA







TEMPERATURE RANGE	: -40°C TO +105°C
-------------------	-------------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 1.27 FEMALE HEADER STRAIGHT, 8.50mm BASE

PART NO: P943XDXXX4-2X

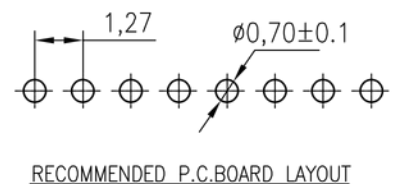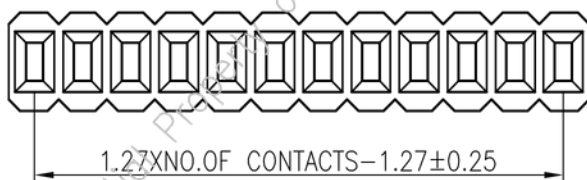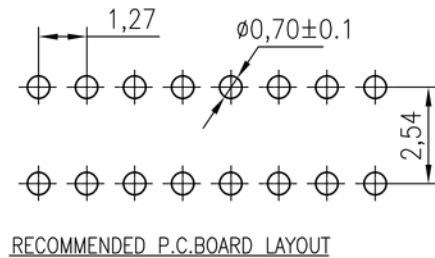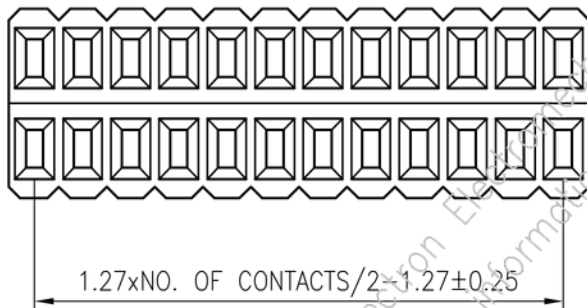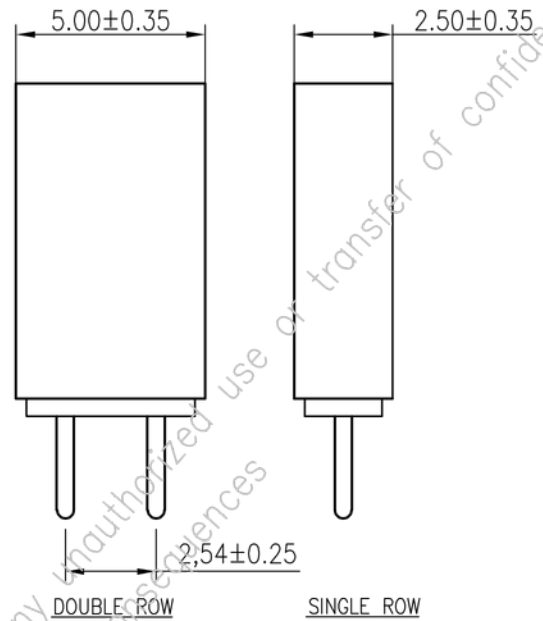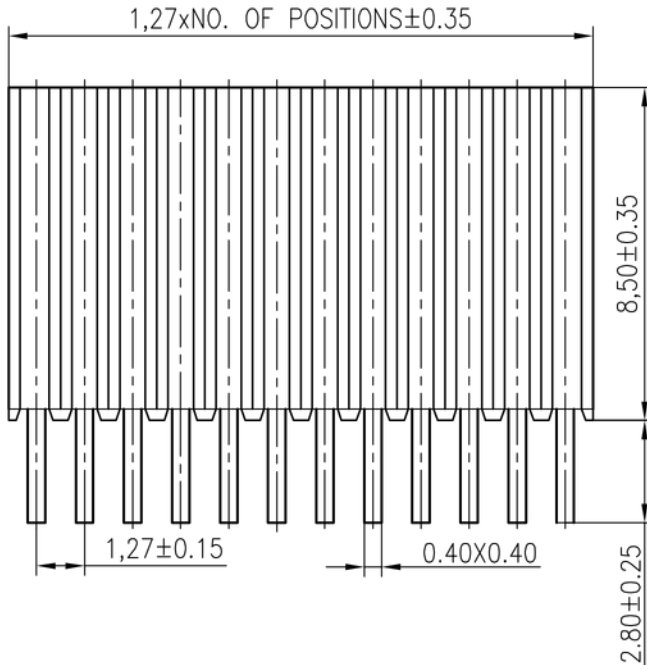

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.:±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 1.27 FEMALE HEADER STRAIGHT, 8.50mm BASE

PART NO: P943XDXXX4-2X

Type of plating(X)

1	Gold Plating
2	0.75 μ Gold
3	Gold on contact side & Tin on solder side
4	5 μ Tin

MATES WITH

P9133

ORDERING INFORMATION

P943XDXXX4-2X

TYPE OF PLATING

NO OF CONTACTS (06-40)

X=1=SINGLE ROW
X=B=DOUBLE ROW

Projection:



Scale: **NTS**

Sht. Size: **A4**

Gen. Tol.: $\pm 0.35\text{mm}$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in