




DESCRIPTION : 1.27 FEMALE HEADER STRAIGHT, 8.50mm BASE

PART NO: P943DXXX4-2X

RoHS



PHYSICAL DATA

INSULATION

MATERIAL : THERMOPLASTIC

FLAMMABILITY : UL94V-0

COLOR : BLACK

CONTACT

MATERIAL : COPPER ALLOY

SOLDER TAILS : REFER TABLE

PACKAGING TYPE : STANDARD

ELECTRICAL DATA

CURRENT RATING : 1A

INSULATION RESISTANCE : 1000M OHMS MIN

DIELECTRIC WITHSTANDING : 300V AC







CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +105°C

DESCRIPTION : 1.27 FEMALE HEADER STRAIGHT, 8.50mm BASE

PART NO: P943XDXXX4-2X

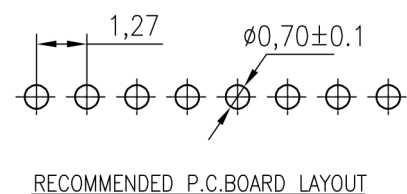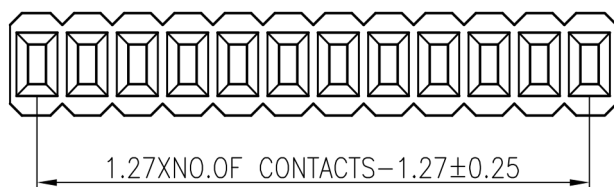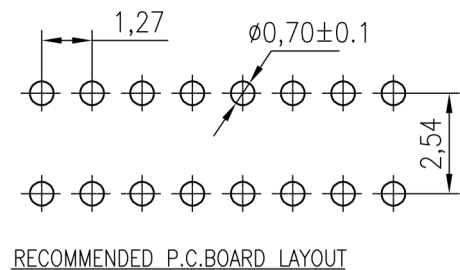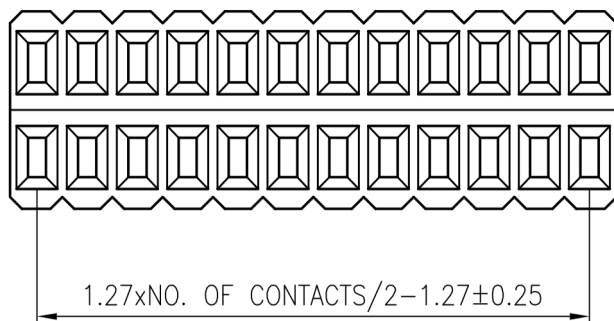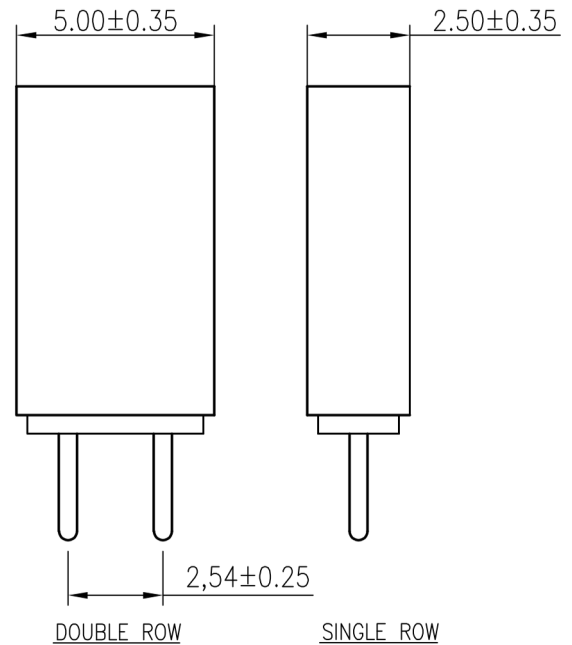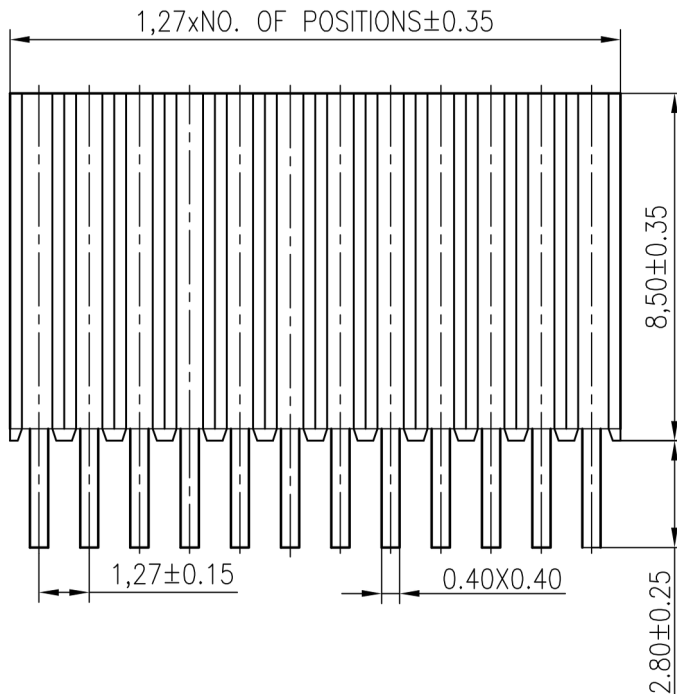

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

DESCRIPTION : 1.27 FEMALE HEADER STRAIGHT, 8.50mm BASE

PART NO: P943XDXXX4-2X

Type of plating(X)

1	Gold Plating
2	0.75 μ Gold
3	Gold on contact side & Tin on solder side
4	5 μ Tin

MATES WITH

P9133

ORDERING INFORMATION

P943XDXXX4-2X

TYPE OF PLATING

NO OF CONTACTS (06-40)

X=1=SINGLE ROW

X=B=DOUBLE ROW

Projection:



Scale: NTS

Sht. Size: A4

 Gen. Tol.: $\pm 0.35\text{mm}$

 ALL DIMENSIONS ARE IN MM.
 IF UNLESS OTHERWISE SPECIFIED.