




DESCRIPTION : 1.27 x 1.27 FEMALE HEADER STRAIGHT

PART NO: P943XXXXX2-2X

RoHS



PHYSICAL

INSULATION

MATERIAL

: POLYESTER

FLAMMABILITY

: UL94V-0

COLOR

: BLACK

CONTACT

MATERIAL

: COPPER ALLOY

SOLDER TAILS

: REFER TABLE

PACKAGING TYPE

: TUBE/TRAY

ELECTRICAL DATA:

CURRENT RATING

: 1A

INSULATION RESISTANCE

: 1000M OHMS MIN

DIELECTRIC WITHSTANDING

: 500V AC

CONTACT RESISTANCE

: 20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE

: -40°C TO +105°C






PROCESS RATING

: 260°C for 5secs



DESCRIPTION : 1.27 x 1.27 FEMALE HEADER STRAIGHT

PART NO: P943XXXXX2-2X

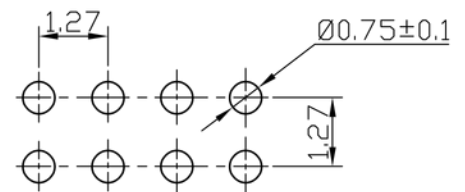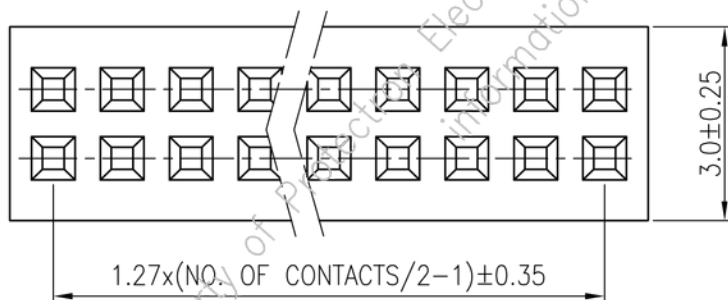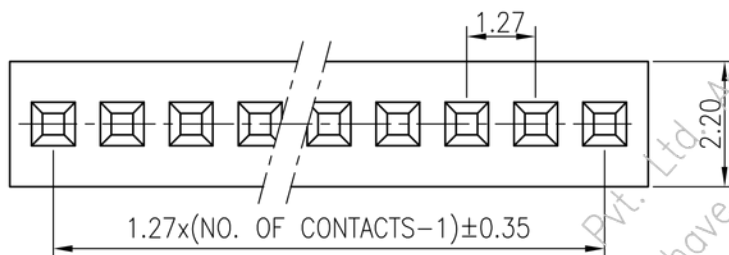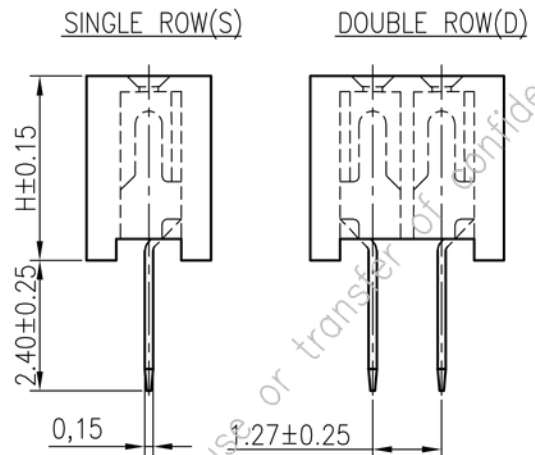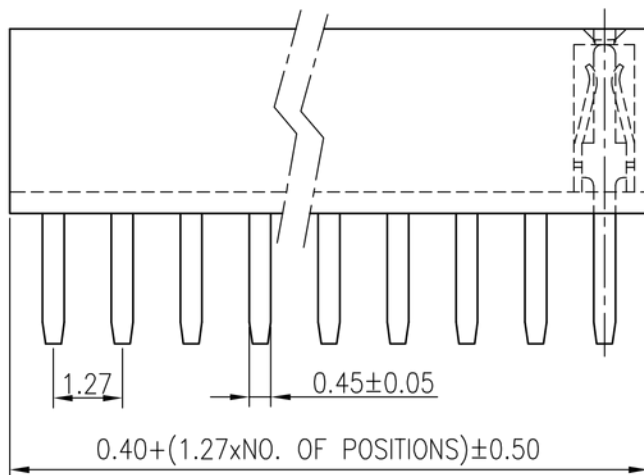

RECOMMENDED P.C. BOARD LAYOUT



DESCRIPTION : 1.27 x 1.27 FEMALE HEADER STRAIGHT

PART NO: P943XXXXX2-2X

ORDERING INFORMATION

P943XXXXX2-2X

X=1=SINGLE ROW
X=3=DOUBLE ROW

X=H=A-3.40mm
X=H=B=4.30mm

NO OF CONTACTS
(6-100)

Type of plating(XX)

21	Gold Plating
22	0.75μ GOLD
23	Gold on contact side & Tin on solder side
24	5μ Tin

MATES WITH

P9133

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.4mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.