




DESCRIPTION : 1.27 x 1.27 FEMALE HEADER STRAIGHT

PART NO: P943XXXXX2-2X

RoHS



PHYSICAL

INSULATION	
MATERIAL	: POLYESTER
FLAMMABILITY	: UL94V-0
COLOR	: BLACK
CONTACT	
MATERIAL	: COPPER ALLOY
SOLDER TAILS	: REFER TABLE
PACKAGING TYPE	: TUBE/TRAY

ELECTRICAL DATA:






CURRENT RATING	: 1A
INSULATION RESISTANCE	: 1000M OHMS MIN
DIELECTRIC WITHSTANDING	: 500V AC
CONTACT RESISTANCE	: 20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE	: -40°C TO +105°C
PROCESS RATING	: 260°C for 5secs

DESCRIPTION : 1.27 x 1.27 FEMALE HEADER STRAIGHT

PART NO: P943XXXXX2-2X

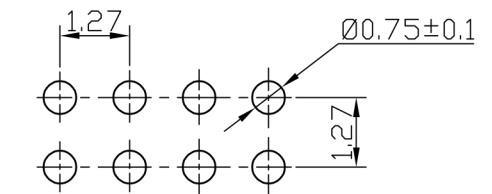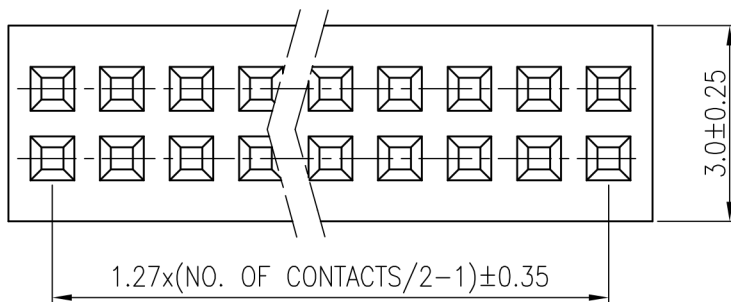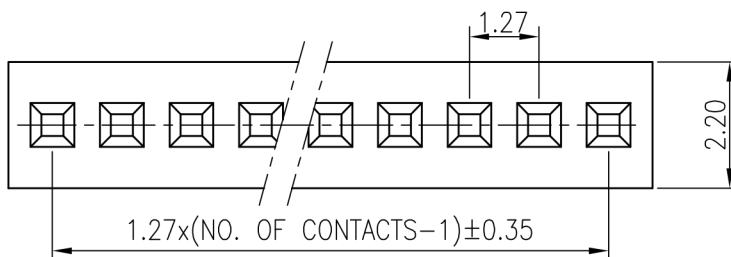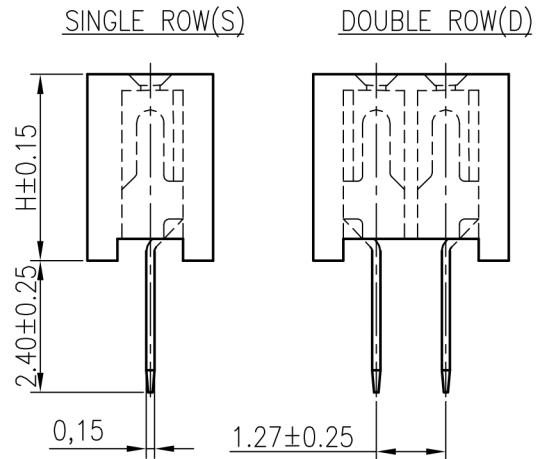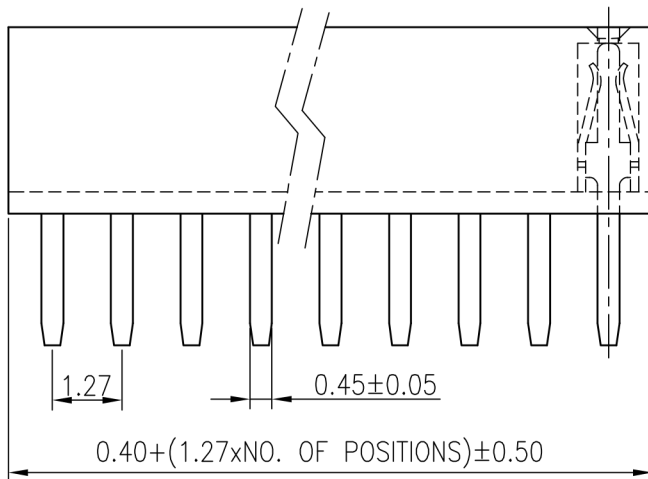


RECOMMENDED P.C.BOARD LAYOUT

DESCRIPTION : 1.27 x 1.27 FEMALE HEADER STRAIGHT

PART NO: P943XXXXX2-2X

ORDERING INFORMATION

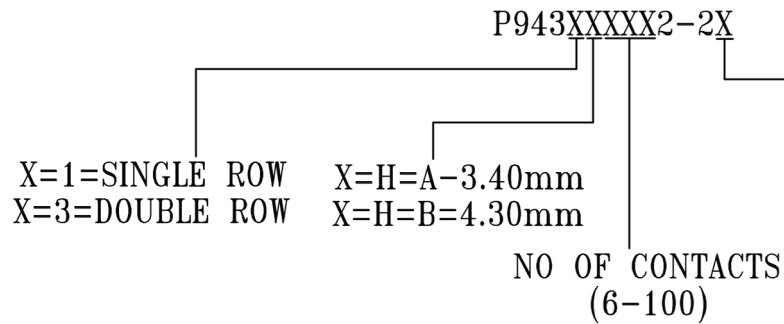

Type of plating(XX)

21	Gold Plating
22	0.75 μ GOLD
23	Gold on contact side & Tin on solder side
24	5 μ Tin

MATES WITH

P9133

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.4 mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.