


DESCRIPTION : 1.00 mm FEMALE HEADER SINGLE ROW, STRAIGHT

PART NO: P9441-XXX121

XXX=NO. OF CONTACTS



RoHS

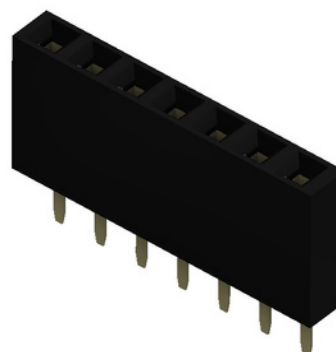

PHYSICAL DATA

INSULATION	:	
MATERIAL	:	THERMOPLASTIC
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK
CONTACT	:	
MATERIAL	:	COPPER ALLOY
FINISH	:	GOLD PLATED
PACKAGING TYPE	:	STANDARD

ELECTRICAL DATA

CURRENT RATING	:	1A
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC
CONTACT RESISTANCE	:	20m OHMS MAX


ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-40° TO +105°C
-------------------	---	----------------

DESCRIPTION : 1.00 mm FEMALE HEADER SINGLE ROW, STRAIGHT

PART NO: P9441-XXX121

XXX=NO. OF CONTACTS

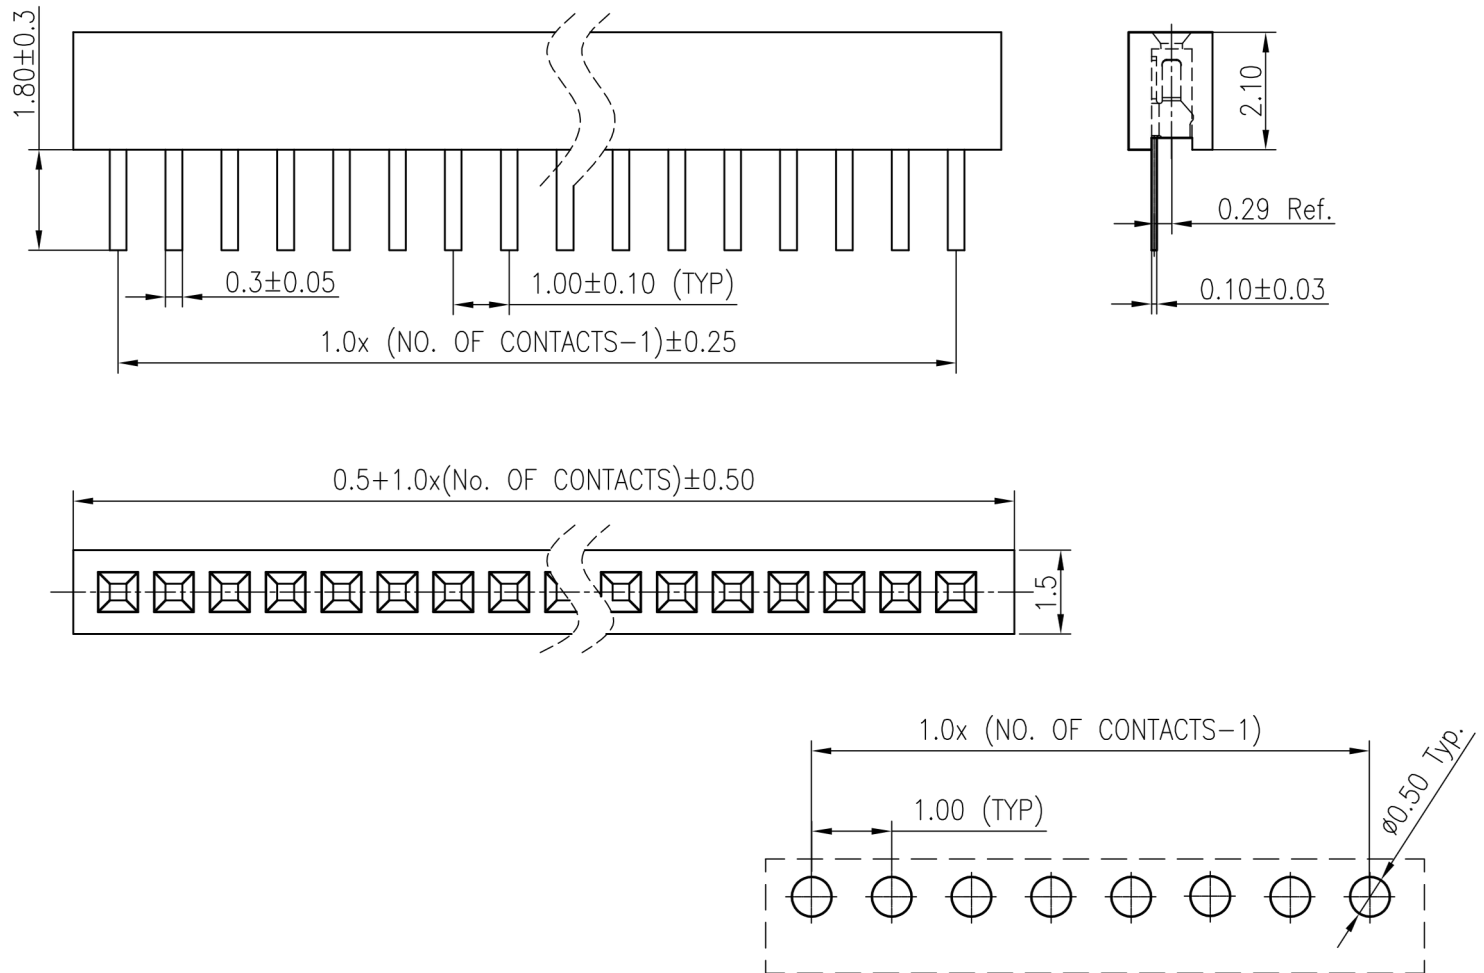


RECOMMENDED P.C.BOARD LAYOUT
LAYOUT TOLERANCE = ± 0.05 mm

ORDERING INFORMATION

P9441-XXX121

NO OF CONTACTS
(01-40)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.35

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.