




DESCRIPTION : 1.00 mm FEMALE HEADER SINGLE ROW, STRAIGHT

PART NO: P9441-XXX121

XXX=NO. OF CONTACTS

RoHS



PHYSICAL DATA

INSULATION

MATERIAL

FLAMMABILITY

COLOR

CONTACT

MATERIAL

FINISH

PACKAGING TYPE

: THERMOPLASTIC
: UL94V-0
: BLACK
: COPPER ALLOY
: GOLD PLATED
: STANDARD

ELECTRICAL DATA

CURRENT RATING

INSULATION RESISTANCE

DIELECTRIC WITHSTANDING

CONTACT RESISTANCE

: 1A
: 1000M OHMS MIN
: 500V AC
: 20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE

: -40° TO +105°C




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 1.00 mm FEMALE HEADER SINGLE ROW, STRAIGHT

PART NO: P9441-XXX121

XXX=NO. OF CONTACTS

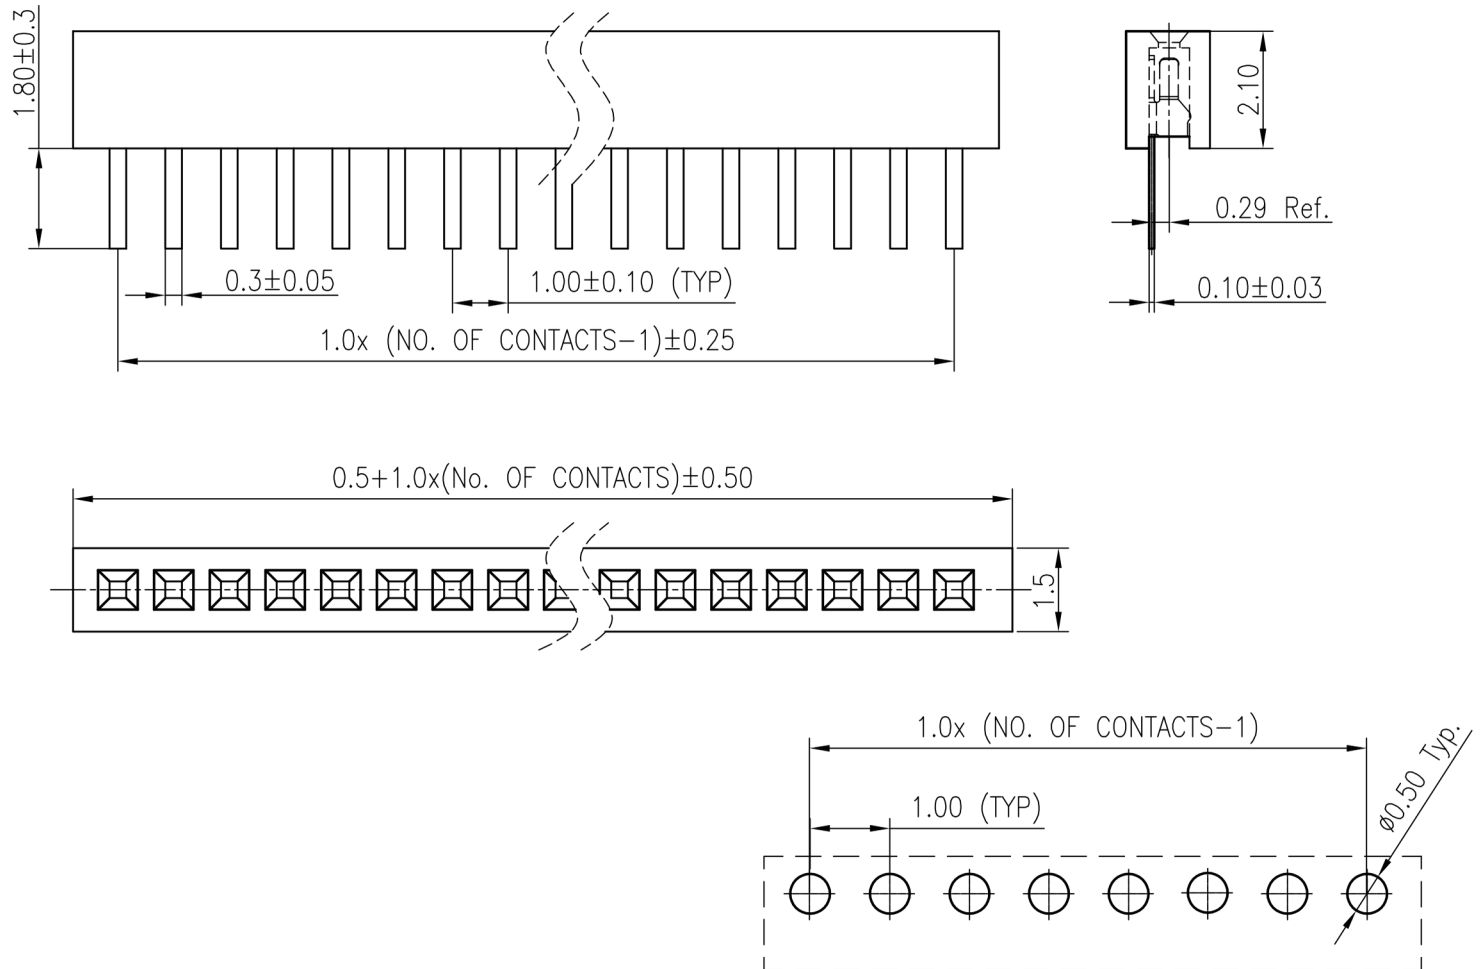

RECOMMENDED P.C.BOARD LAYOUT
LAYOUT TOLERANCE = ± 0.05 mm

ORDERING INFORMATION

P9441-XXX121

NO OF CONTACTS
(01-40)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.35

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in