




DESCRIPTION : FEMALE HEADER 1mm X 1mm PITCH, DOUBLE ,
ROW SMT RoHS

PART NO: P9445-XXX-21
XXX=NO. OF CONTACTS

RoHS



PHYSICAL DATA

INSULATOR BODY : POLYESTER, UL94V-0
FINISH : PHOSPHOR BRONZE, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING : 0.75 AMP
CONTACT RESISTANCE : 30m OHMS MAX
INSULATION RESISTANCE : 1000M OHMS MIN
WITHSTANDING VOLTAGE : 500V AC FOR ONE MINUTE

ENVIRONMENTAL DATA





OPERATING TEMP. RANGE : -40° TO +105° C
SOLDERING TEMPERATURE : 260°C/5sec.



PROTECTRON®
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 1mm X 1mm PITCH, DOUBLE ,
ROW SMT RoHS

PART NO: P9445-XXX-21
XXX=NO. OF CONTACTS

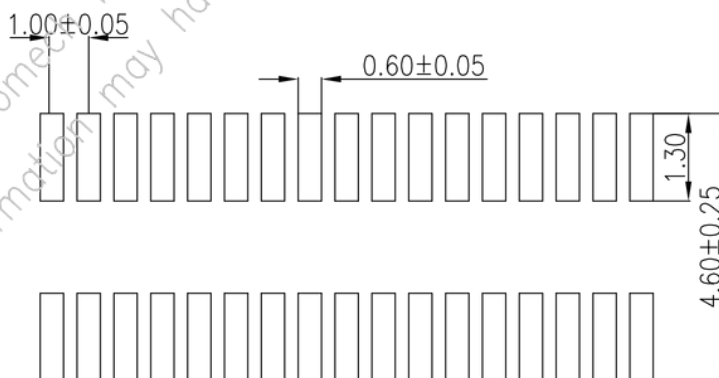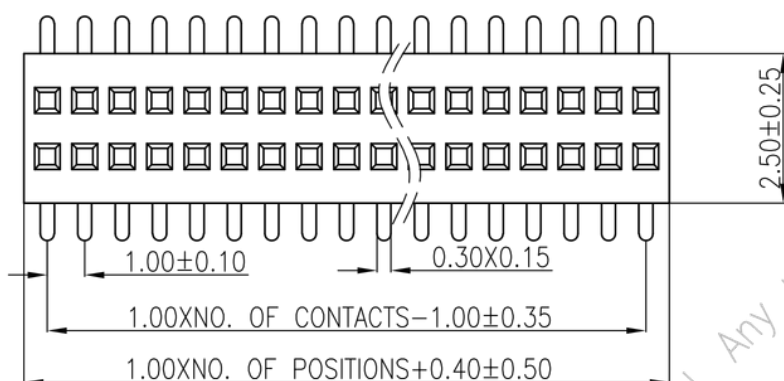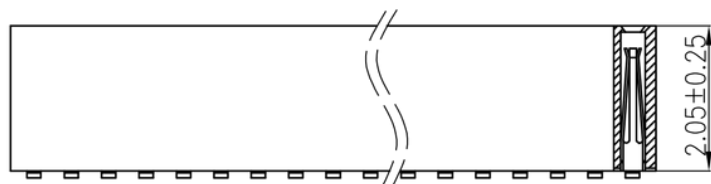

RECOMMENDED PCB LAYOUT (PCB TOLERANCE ± 0.05)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in