


DESCRIPTION : 0.8mm PITCH FEMALE HEADER, SMD DOCKING TYPE

PART NO: P9455XXXX-21
PROFILE NO. OF CONTACTS

RoHS



PHYSICAL DATA

INSULATOR BODY	:	NYLON 6T OR LCP (UL94V-0)
CONTACT PIN	:	COPPER ALLOY, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING	:	0.5 A
INSULATION RESISTANCE	:	1000 M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC FOR ONE MINUTE
CONTACT RESISTANCE	:	20m OHMS MAX

ENVIRONMENTAL DATA


OPERATING TEMPERATURE	:	-40°C TO +105°C
-----------------------	---	-----------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 0.8mm PITCH FEMALE HEADER, SMD DOCKING TYPE

PART NO: P9455XXX-21
PROFILE **NO. OF CONTACTS**

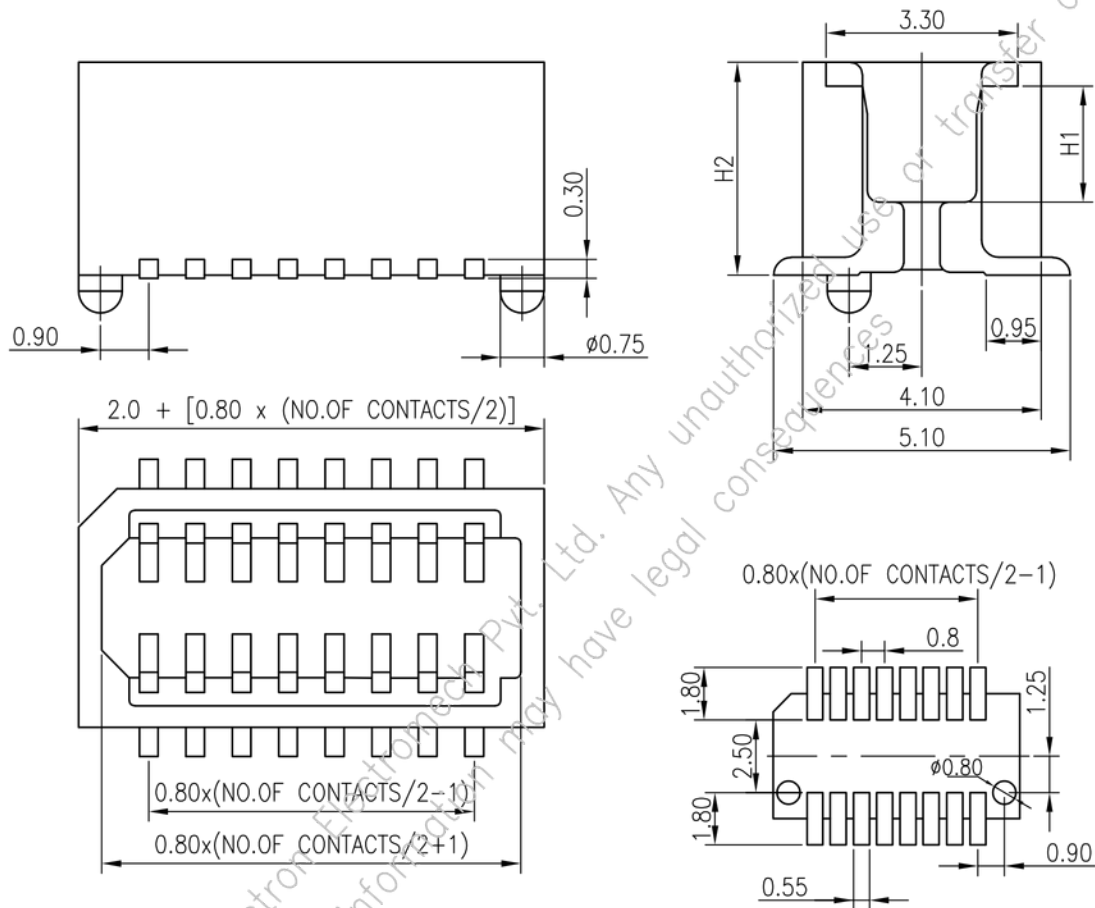

RECOMMENDED P.C.BOARD LAYOUT

PROFILE	ASSEMBLY HEIGHT	H1	H2
A	4.50	2.0	3.65
B	6.0	3.50	5.15
C	6.50	3.50	5.50
D	7.0	4.50	6.15

Projection:



Scale: **NTS**

Sht. Size: **A4**

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.