




DESCRIPTION : FEMALE HEADER 0.8mm PITCH DUAL ROW SMT
TYPE

PART NO: P9457-XXX-21
XXX=NO. OF CONTACTS(4-80)

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: POLYESTER
FLAMMABILITY	: UL94V-0
COLOR	: BLACK
CONTACT	
MATERIAL	: COPPER ALLOY
FINISH	: GOLD PLATED
PACKAGING TYPE	: STANDARD

ELECTRICAL DATA

CURRENT RATING	: 0.75A
INSULATION RESISTANCE	: 1000M OHMS MIN
DIELECTRIC WITHSTANDING	: 500V AC/MIN
CONTACT RESISTANCE	: 30m OHMS MAX

ENVIRONMENTAL DATA




TEMPERATURE RANGE	: -40° TO +105°C
-------------------	------------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 0.8mm PITCH DUAL ROW SMT
TYPE

PART NO: P9457-XXX-21
XXX=NO. OF CONTACTS(4-80)

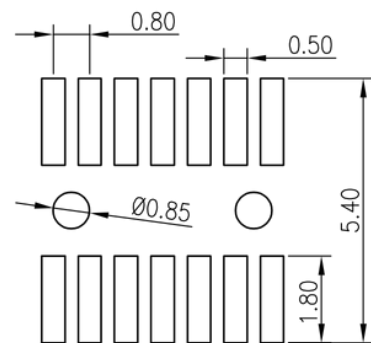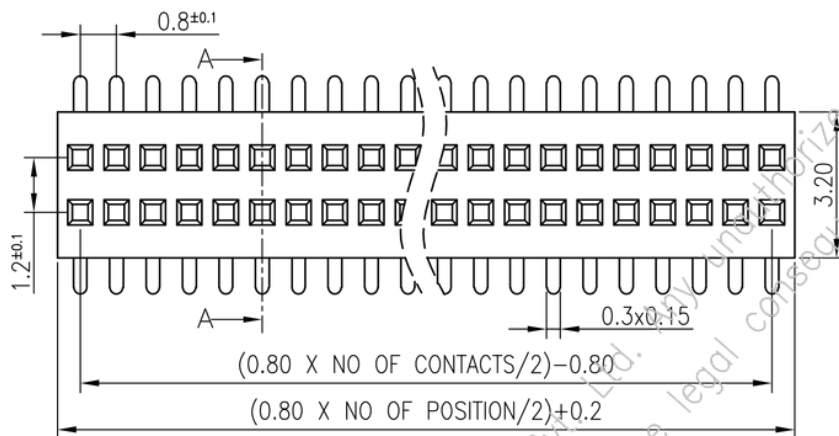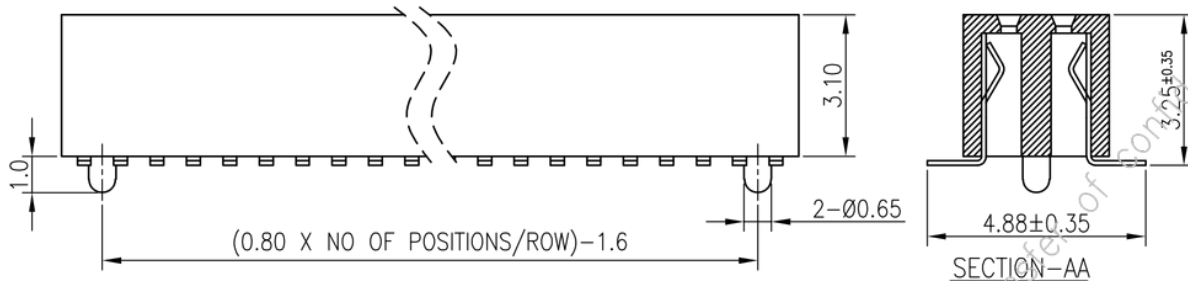

ORDERING INFORMATION

P9457-XXX-21

NO OF CONTACTS
(4-80)

RECOMMENDED PCB LAYOUT(TOP SIDE)
(PCB TOLERANCE ±0.05)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.5mm
±0.2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in