




DESCRIPTION : 2.54mm PITCH FEMALE HEADER, 5mm BASE,
DUAL BEAM FOLDED CONTACT, SINGLE ROW, R/A

PART NO: P9502-XX-2X

RoHS



PHYSICAL DATA

INSULATOR BODY	:	POLYESTER, UL94V-0
CONTACT	:	COPPER ALLOY

ELECTRICAL DATA

CURRENT RATING	:	3 AMPS
CONTACT RESISTANCE	:	20mΩ MAX
INSULATION RESISTANCE	:	5000MΩ MIN
WITHSTANDING VOLTAGE	:	500V AC/MINUTE

MECHANICAL DATA

INSERTION FORCE/CONTACT	:	200gms. max.
EXTRACTION FORCE/CONTACT	:	20gms. min.

ENVIRONMENTAL DATA





TEMPERATURE RANGE	:	-40°C TO +105°C
-------------------	---	-----------------



PROTECTRON
ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH FEMALE HEADER, 5mm BASE,
DUAL BEAM FOLDED CONTACT, SINGLE ROW, R/A

PART NO: P9502-XX-2X

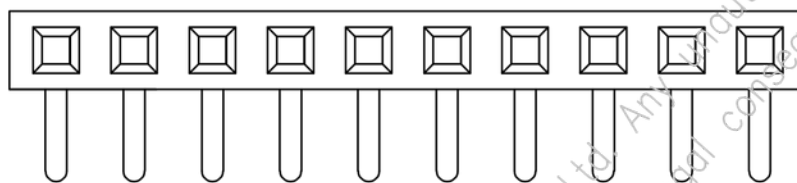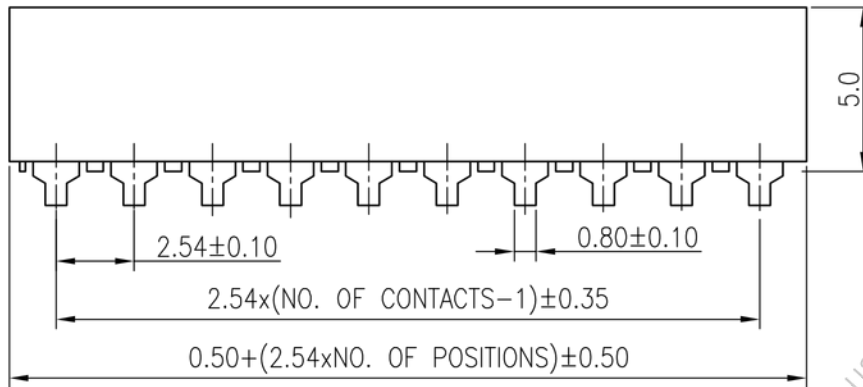

RECOMMENDED P.C BOARD LAYOUT


ORDERING INFORMATION

P9502-XX-2X

NO OF CONTACTS
(2-40 PINS)

X	PLATING
1	GOLD FLASH
2	0.75μ GOLD
3	SELECTIVE GOLD
4	5μ TIN

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.3mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.