


DESCRIPTION : 2.54mm PITCH FEMALE HEADER, 5mm BASE
DUAL BEAM FOLDED CONTACT, DOUBLE ROW

PART NO:P9503-XX-21

RoHS



PHYSICAL DATA

INSULATOR BODY : POLYESTER (UL 94V-0)
CONTACT : COPPER ALLOY, GOLD PLATED

ELECTRICAL DATA

RATED CURRENT : 1 AMP
CONTACT RESISTANCE : 20m OHMS MAX
INSULATION RESISTANCE : 5000 M OHMS MIN
DIELECTRIC VOLTAGE : 500V AC FOR ONE MINUTE

MECHANICAL DATA

INSERTION FORCE : 200gms MAX
EXTRACTION FORCE : 20gms MIN

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH FEMALE HEADER, 5mm BASE
DUAL BEAM FOLDED CONTACT, DOUBLE ROW

PART NO:P9503-XX-21

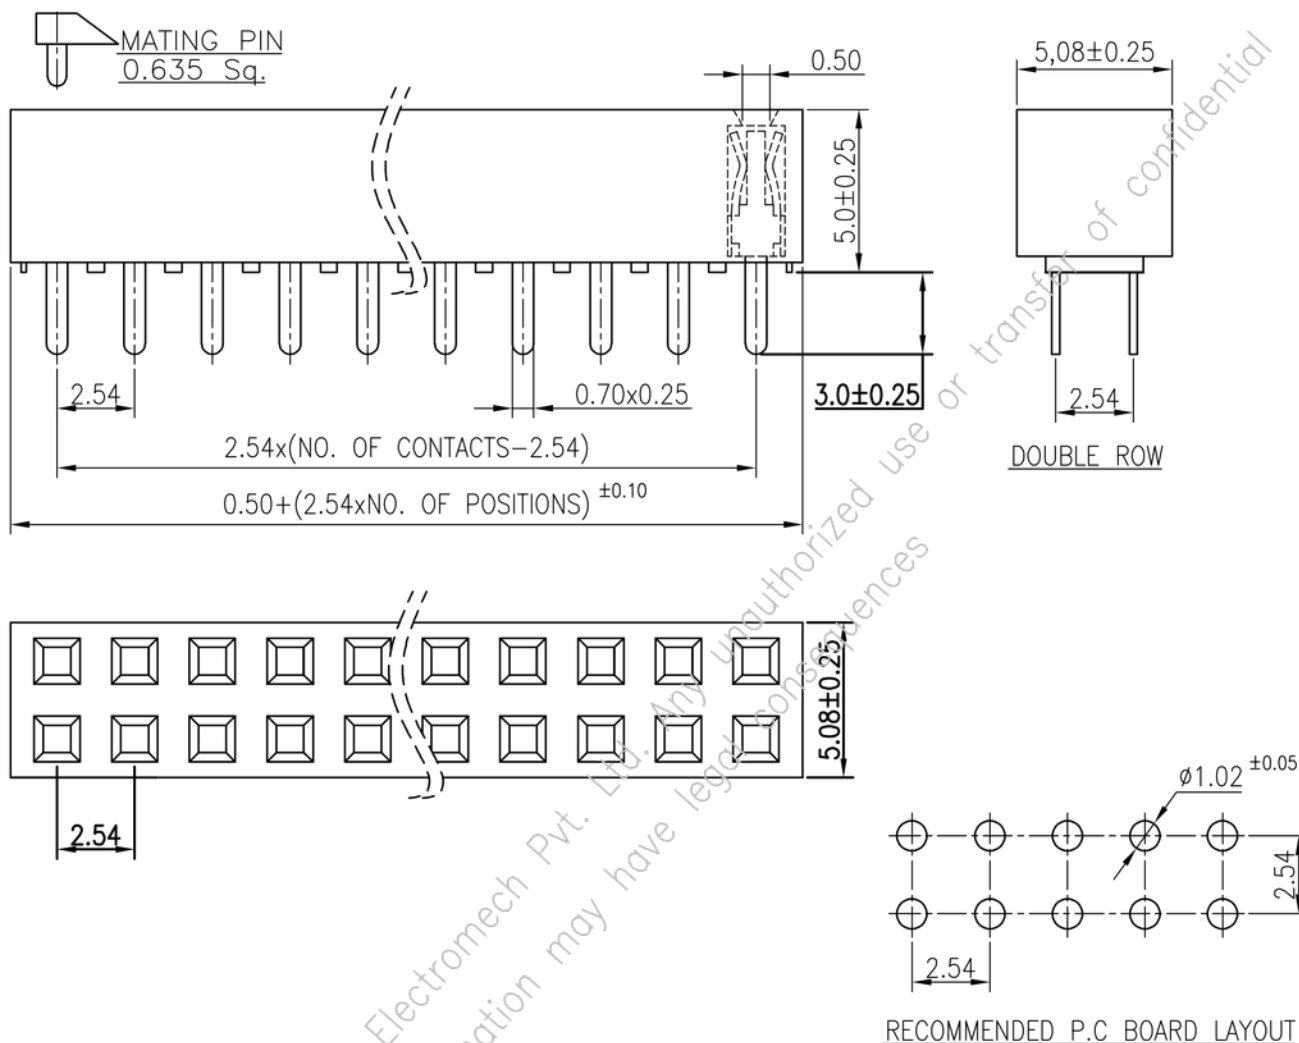

ORDERING INFORMATION

P9503-XX-21

NO. OF CONTACTS
(3-40)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.