




DESCRIPTION: 2.54mm BOX HEADER, DUAL ROW, SURFACE MOUNT
WITHOUT PEG, RoHS

PART NO: P9605-XX-15-1

RoHS 



PHYSICAL DATA

MATERIAL

INSULATOR BODY	:	PA6T
FLAMMABILITY	:	UL94V-0
CONTACT	:	COPPER ALLOY, GOLD FLASH

ELECTRICAL DATA

CURRENT RATING	:	3A
INSULATION RESISTANCE	:	1000M Ω Min. AT 100V
CONTACT RESISTANCE	:	20m Ω Max.
DIELECTRIC WITHSTANDING	:	550V AC FOR ONE MINUTE

MECHANICAL DATA

RETENTION FORCE	:	1Kgf/CONTACT MIN.
-----------------	---	-------------------

ENVIRONMENTAL DATA





OPERATING TEMPERATURE	:	-40°C TO +105°C
-----------------------	---	-----------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION: 2.54mm BOX HEADER, DUAL ROW, SURFACE MOUNT
WITHOUT PEG, RoHS

PART NO: P9605-XX-15-1

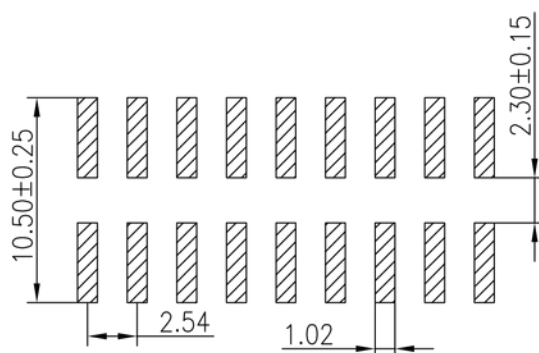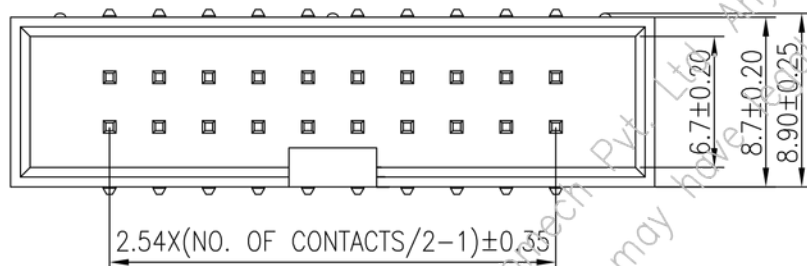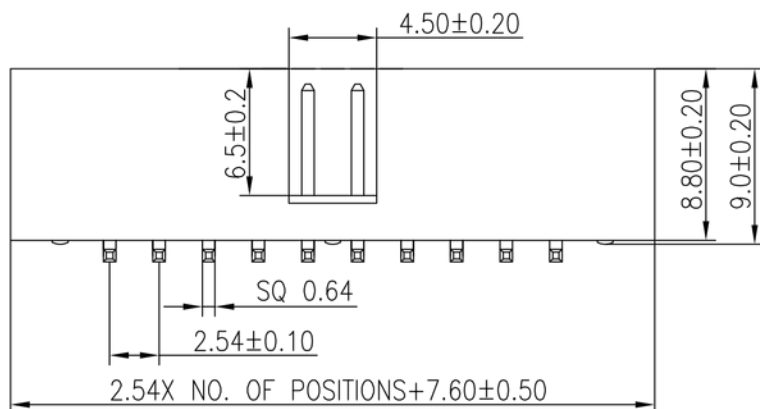

RECOMMENDED P.C.B LAYOUT
(TOLERANCE±0.05)

ORDERING INFORMATION

P9605-XX-15-1

NO.OF CONTACTS
(04-100)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.