




DESCRIPTION : 1.27x1.27mm BOX HEADER, DUAL ROW
STRAIGHT, GOLD FLASH, RoHS

PART NO: P9633SXXX-35-1
XX=NO. OF CONTACTS



RoHS

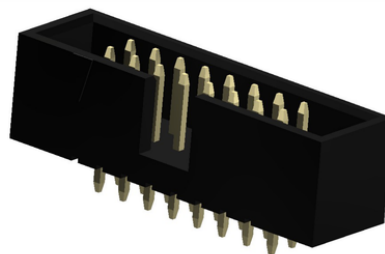

PHYSICAL DATA

INSULATION BODY : POLYESTER, UL 94V-0/ NYLON 6T
CONTACT : COPPER ALLOY, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING : 1A
CONTACT RESISTANCE : 20m OHMS MAX
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC FOR ONE MINUTE

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 1.27x1.27mm BOX HEADER, DUAL ROW
STRAIGHT, GOLD FLASH, RoHS

PART NO: P9633SXXX-35-1
XX=NO. OF CONTACTS

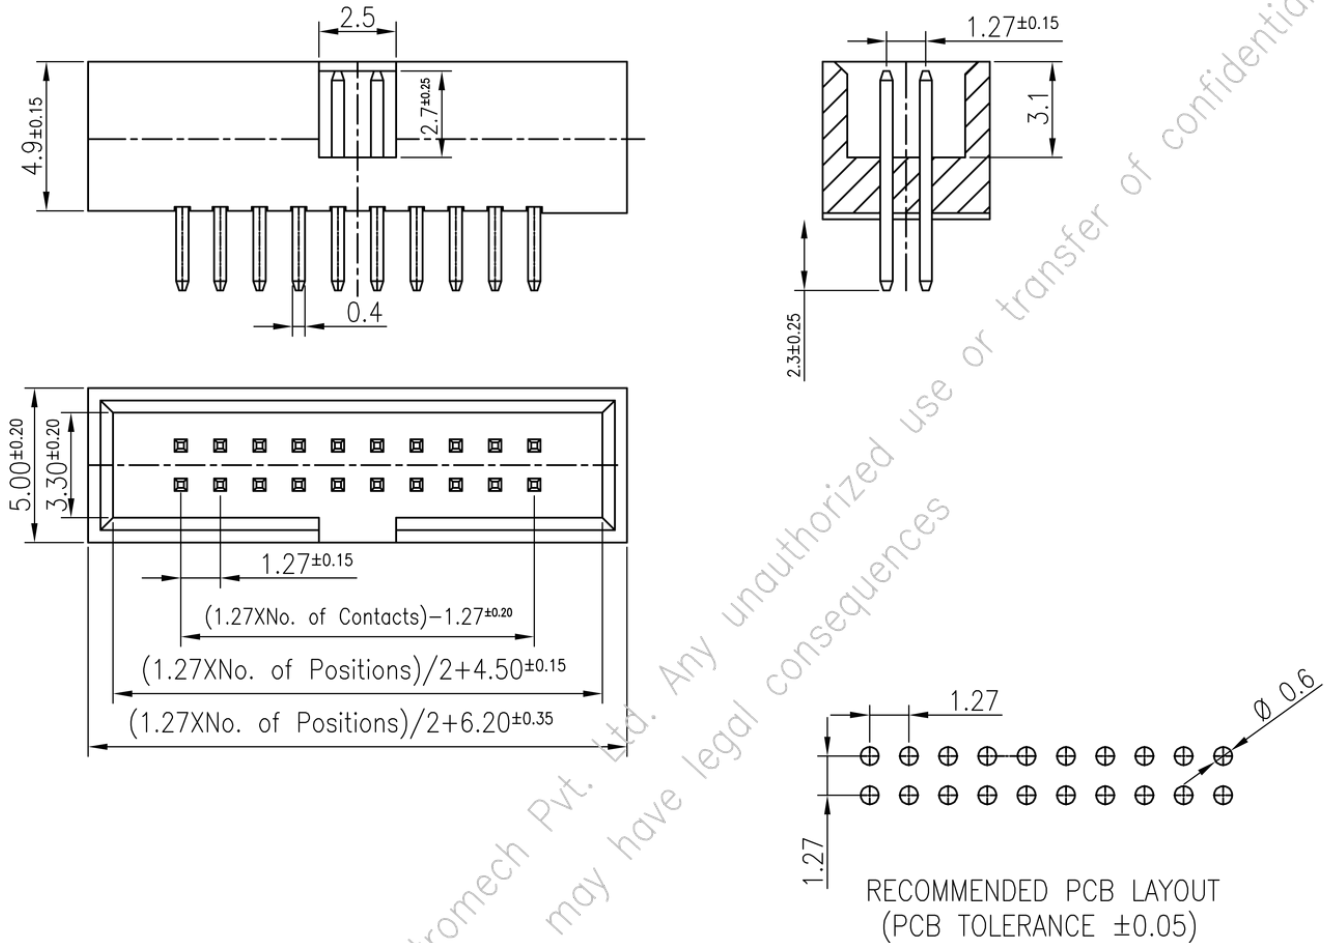

ORDERING INFORMATION

MATES WITH
P9433, P9435

P9633SXXX-35-1

NO.OF CONTACTS
(6-100)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.50\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in