




PROTECTRON®
ELECTROMECH (P) LTD

DESCRIPTION : 1.27X1.27mm BOX HEADER, DUAL ROW
SURFACE MOUNT WITH ALIGNMENT.

PART NO: P9635SXXX-35-XA



RoHS

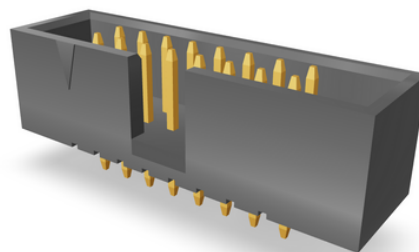

PHYSICAL DATA

MATERIAL DATA:

INSULATOR BODY

: HIGH-TEMP. THERMOPLASTIC, UL 94V-0

CONTACT

: COPPER ALLOY, GOLD PLATED

ELECTRICAL DATA

RATED CURRENT

: 1A

INSULATION RESISTANCE

: 1000M Ω MIN

CONTACT RESISTANCE

: 20m Ω MAX

DIELECTRIC WITHSTANDING

: 500V AC FOR ONE MINUTE

ENVIRONMENTAL DATA

TEMPERATURE RANGE





: -55° TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 1.27X1.27mm BOX HEADER, DUAL ROW
SURFACE MOUNT WITH ALIGNMENT.

PART NO: P9635SXXX-35-XA

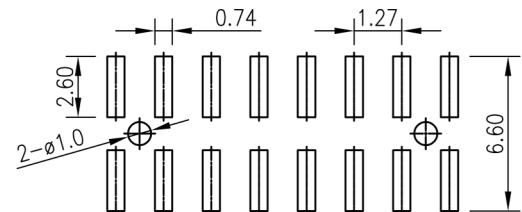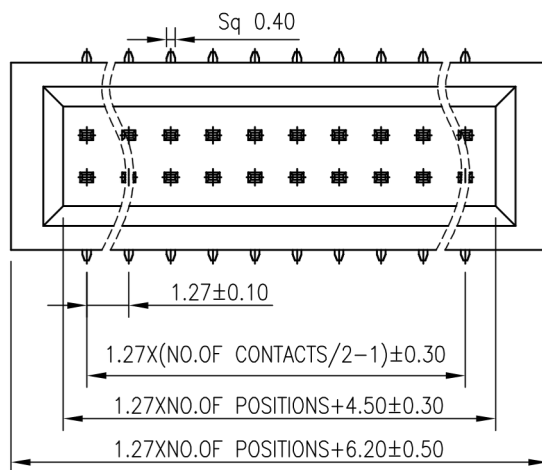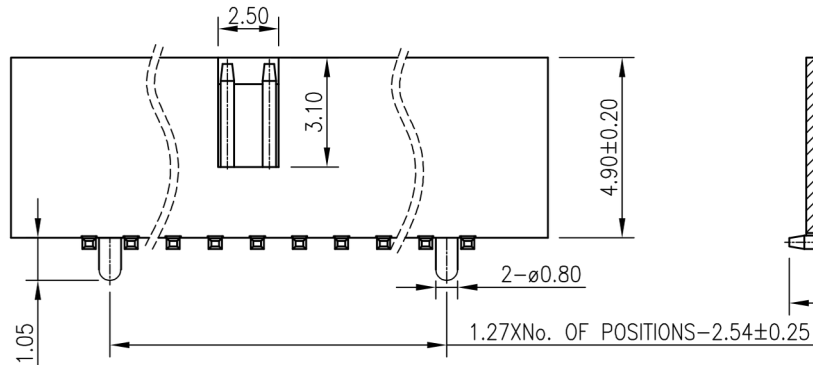

RECOMMENDED P.C.B. LAYOUT
P.C.B LYOUT TOLERANCE±0.05

ORDERING INFORMATION

P9635SXXX-35-XA

NO.OF CONTACTS
(12 PIN, 20~100)

X=PLATING

1:GOLD FLASH

2:0.75 μ GOLD PLATED

3:0.75 μ GOLD ON MATING

TIN ON SOLDER SIDE

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.:±0.5mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.