




DESCRIPTION : FEMALE HEADER 2.54mm PITCH TO SUIT BOX
HEADER, DR, RIGHT ANGLE WITH POLARIZATION PAD, RoHS

PART NO: P9704-XX-XX

RoHS



PHYSICAL DATA

INSULATION BODY : POLYESTER, UL 94V-0
CONTACT : PHOSPHOR BRONZE

ELECTRICAL DATA

CURRENT RATING : 3A
INSULATION RESISTANCE : 10000M Ω MIN
DIELECTRIC WITHSTANDING : 1000V AC FOR ONE MINUTE
CONTACT RESISTANCE : 20m OHMS MAX.

MECHANICAL DATA

INSERTION FORCE/CONTACT : 0.07Kg Avg
EXTRACTION FORCE/CONTACT : 0.05Kg Avg

ENVIRONMENTAL DATA





TEMPERATURE RANGE : -40°C TO +105°C



PROTECTRON
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.54mm PITCH TO SUIT BOX
HEADER, DR, RIGHT ANGLE WITH POLARIZATION PAD, RoHS

PART NO: P9704-XX-XX

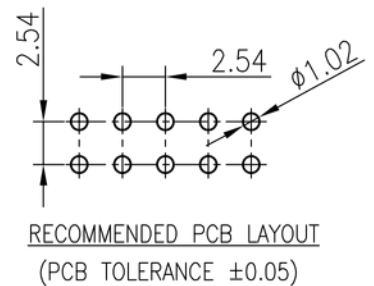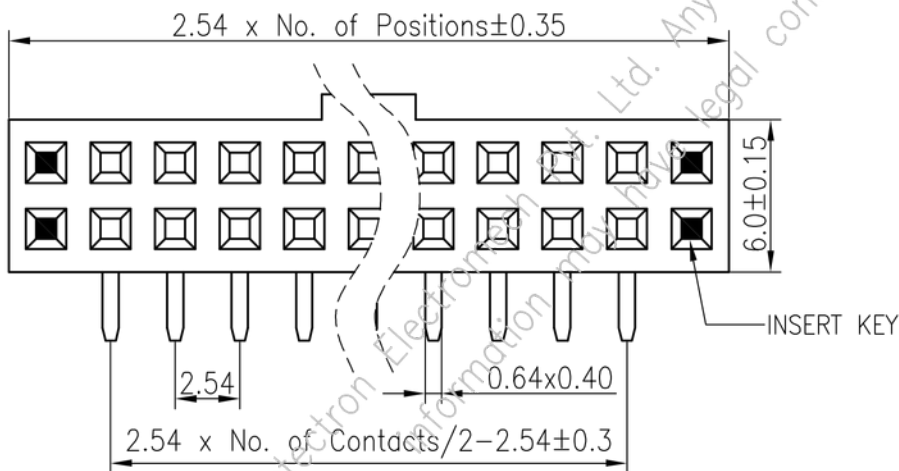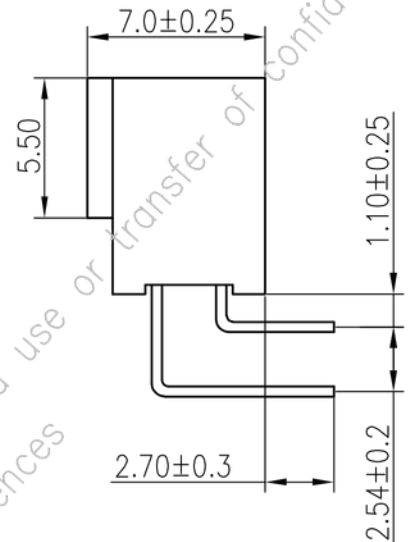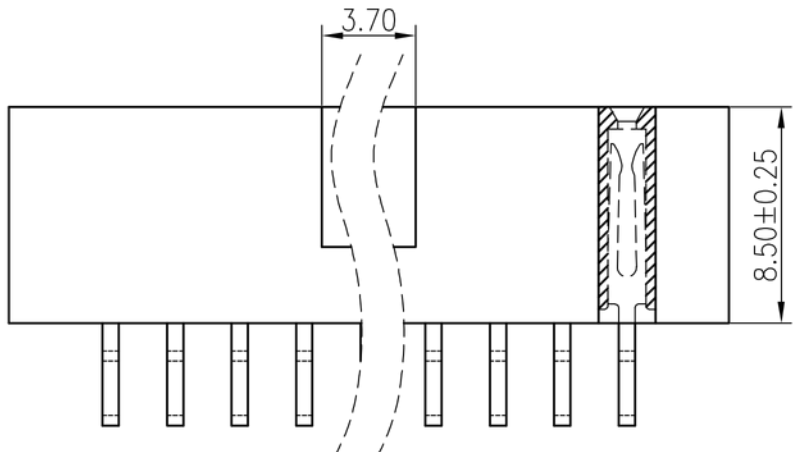

P9704-XX-XX

XX=NO.OF CONTACTS(08-76)

XX=PLATING

XX	PLATING
21	GOLD FLASH
23	GOLD FLASH ON CONTACT SIDE & TIN ON SOLDER SIDE
24	TIN

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in