




DESCRIPTION : FEMALE HEADER 2.0mm PITCH, WITH
POLARIZATION PAD, PROFILE=4.0mm

PART NO: P9713-XX-21
XX : NO OF CONTACTS

RoHS



PHYSICAL DATA

MATERIAL DATA:

HOUSING

: THERMOPLASTIC, UL 94V-0

PIN HEADER

: COPPER ALLOY, Au OR Sn OVER Ni PLATING

ELECTRICAL DATA

RATED CURRENT

: 2.0AMP

CONTACT RESISTANCE

: 20m OHMS MAX.

INSULATION RESISTANCE

: 5000M OHMS MIN.

DIELECTRIC VOLTAGE

: 500V AC FOR 1minute

ENVIRONMENTAL DATA

TEMPERATURE RANGE

: -40°C ~ +105°C

SOLDERING TEMPERATURE


: 245°C±5° FOR 5SEC



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.0mm PITCH, WITH
POLARIZATION PAD, PROFILE=4.0mm

PART NO: P9713-XX-21
XX : NO OF CONTACTS

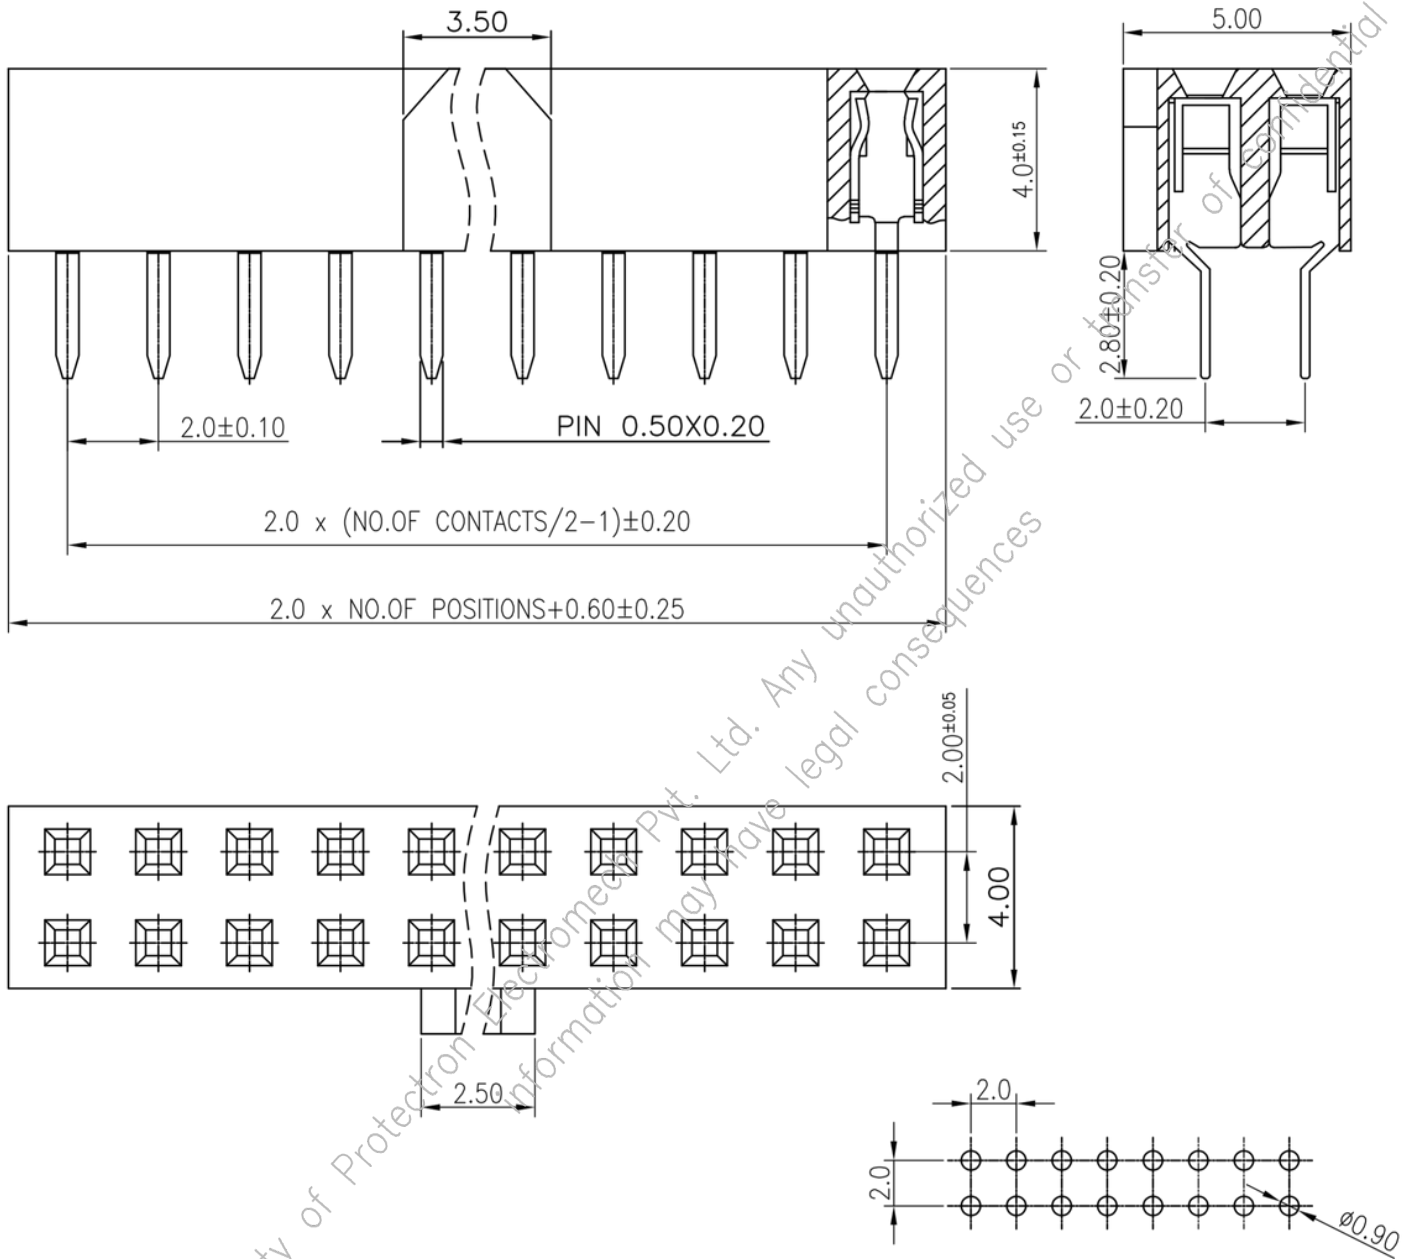

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in