




DESCRIPTION : EJECTOR HEADER 2.54mm PITCH, DOUBLE ROW
STRAIGHT, LONG LATCH, RoHS

PART NO: P9903-XXA-15L1



PHYSICAL DATA

MATERIAL DATA:

INSULATOR BODY : PBT, UL 94V-0, BLACK COLOR
CONTACT : COPPER ALLOY, 0.75 μ GOLD PLATED

ELECTRICAL DATA

RATED CURRENT : 3A
INSULATION RESISTANCE : 1000M Ω Min.
CONTACT RESISTANCE : 20m Ω Max.
DIELECTRIC WITHSTANDING : 550V AC FOR ONE MINUTE

MECHANICAL DATA

RETENTION FORCE : 0.8Kgf/CONTACT Min.

ENVIRONMENTAL DATA





TEMPERATURE RANGE : -40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : EJECTOR HEADER 2.54mm PITCH, DOUBLE ROW
STRAIGHT, LONG LATCH, RoHS

PART NO: P9903-XXA-15L1

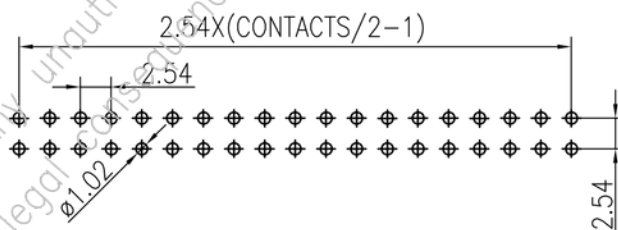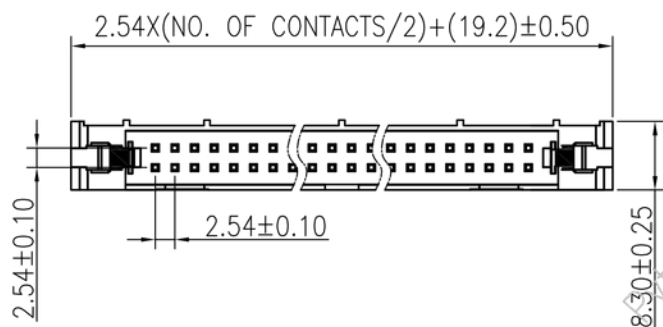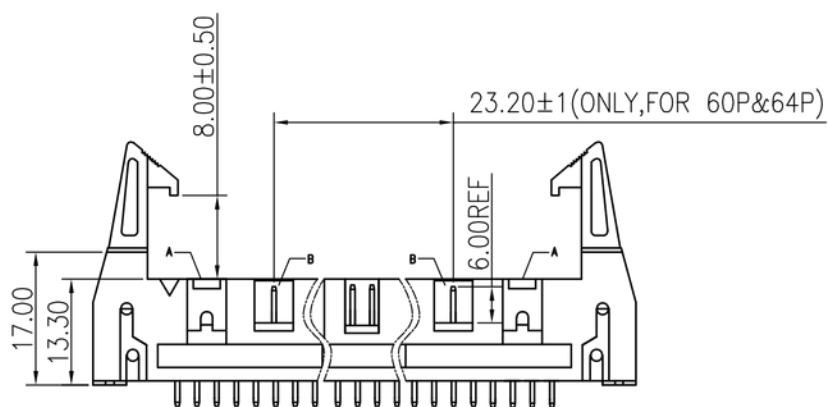

RECOMMENDED P.C.B. LAYOUT
(PCB TOLERANCE ±0.10)

NOTE: 06P-18P WITHOUT SLOT "A" AND "B"
20P-58P WITHOUT SLOT "A" AND WITH SLOT "B"
60P-64P WITH SLOT "A" AND "B"

MATES WITH
P9403IDS

ORDERING INFORMATION

P9903-~~XXA~~-15L1

NO OF CONTACTS
(10-64)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.50mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.